

SHURE®

LEGENDARY
PERFORMANCE™

Countryman Type 85

Active Direct Box



Reflecting the ultimate engineering and highest-quality materials, the Type 85 Direct Box adds nothing and removes nothing from the instrument's signal. No distortion. No electronic hum or buzz. No loss of dynamic range. It's the only active direct box that delivers such a clear, strong, warm signal to the console.

Performance

- Transparent signal to the mix board with no added noise or distortion
- Isolates ground buzz between console and amp

Design

- Low profile, compact form factor
- Almost invisible on stage

Durability

- Single-piece extruded case with extra-thick walls
- Internal electronics are molded in a solid epoxy block and fully protected against electrical damage
- Input circuit withstands 220V AC, and static spikes up to 20,000 volts

PRODUCT HIGHLIGHTS

Connects any high-impedance instrument to an XLR microphone input

9V battery or phantom power

Virtually indestructible

Type 85 Active Direct Box


Overview

Sleek, compact, and virtually indestructible, the Type 85 Direct Box delivers the purest signal from instrument to console with no added distortion or loss of dynamic range.


Specifications (subject to change)

Frequency Response	20 Hz - 20 kHz +/- 1 dB
Noise (shorted input)	.63 µV RMS (-122 dBu) BW = 20 kHz
Power Requirements	9 V battery or .4 mA @ 48 V Phantom
Input Protection	220 V RMS and 20,000 V static discharges
Voltage Gain	-10 dB in Pickup mode -46 dB in Speaker mode
RF Filtering	250 kHz Low Pass on input 30 kHz Low Pass on output
Distortion	.018% THD @ 1 kHz and 1 V P-P in .08% IMD 10 kHz/60 Hz 1 V P-P in
Input Resistance	10 MOhms in Pickup mode (10 times the input resistance of a typical guitar amplifier.)
Input Capacitance	160 picofarad, equal to two feet of low-capacitance guitar cable.
Dimensions	1.75 in x 3 in x 5 in (45 mm x 77 mm x 127 mm)
Weight	18.5 oz (.52 kg)

Typical Bass Guitar Setup

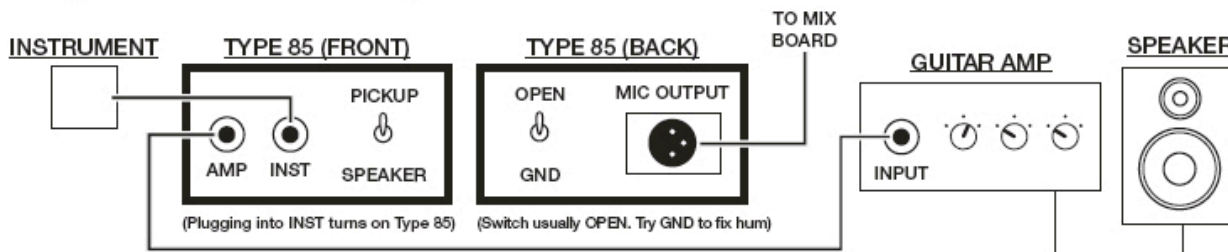

Typical Lead Guitar Setup

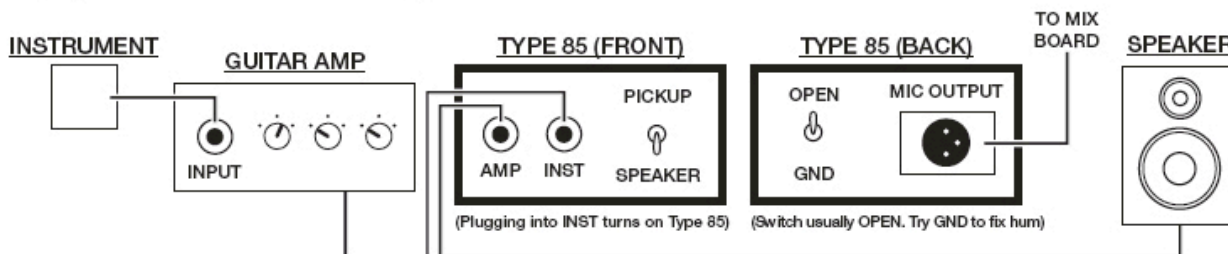

SHURE[®]
LEGENDARY
PERFORMANCE™

www.shure.com

United States:
Shure Incorporated
5800 West Touhy Avenue
Niles, IL 60714-4608 USA

Phone: 847-600-2000
Fax: 847-600-1212
Email: info@shure.com

Europe, Middle East, Africa:
Shure Europe GmbH
Wannenäckerstr. 28,
74078 Heilbronn, Germany

Phone: 49-7131-72140
Fax: 49-7131-721414
Email: info@shure.de

Asia, Pacific:
Shure Asia Limited
3/F, Citicorp Centre
18 Whitfield Road
Causeway Bay, Hong Kong

Phone: 852-2893-4290
Fax: 852-2893-4055
Email: info@shure.com.hk

**Canada, Latin America,
Caribbean:**
Shure Incorporated
5800 West Touhy Avenue
Niles, IL 60714-4608 USA

Phone: 847-600-2000
Fax: 847-600-6446
Email: international@shure.com

©2008 Shure Incorporated