




New

Economy Spreader Beams

These versatile lifters are ideal for lifting a variety of loads where headroom is limited. Complies with OSHA and ANSI B30.20 standards. Two safety swivel hooks and durable powder coat finish. Heavy-duty welded steel construction.

MODEL NUMBER	FIXED SPREAD	HEADROOM	CAPACITY (POUNDS)	NET WT. (POUNDS)
SBM-10-3	36"	12½"	1,000	37
SBM-10-4	48"	12½"	1,000	47
SBM-10-6	72"	12½"	1,000	72
SBM-10-8	96"	12½"	1,000	97
SBM-10-10	120"	13½"	1,000	140
SBM-10-12	144"	13½"	1,000	163
SBM-20-3	36"	12½"	2,000	39
SBM-20-4	48"	12½"	2,000	51
SBM-20-6	72"	12½"	2,000	95
SBM-20-8	96"	14½"	2,000	137
SBM-20-10	120"	14½"	2,000	179
SBM-20-12	144"	15½"	2,000	242
SBM-40-3	36"	13½"	4,000	58
SBM-40-4	48"	12½"	4,000	74
SBM-40-6	72"	15½"	4,000	131
SBM-40-8	96"	16½"	4,000	194
SBM-40-10	120"	16½"	4,000	252
SBM-40-12	144"	17½"	4,000	336
SBM-60-3	36"	14¾"	6,000	60
SBM-60-4	48"	14¾"	6,000	78
SBM-60-6	72"	15¾"	6,000	137
SBM-60-8	96"	16¾"	6,000	197
SBM-60-10	120"	17¾"	6,000	312
SBM-60-12	144"	18¾"	6,000	395

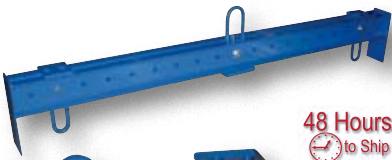

48 Hours to Ship

POWDER COATED TOUGH



UPPER BAIL model SM-UB



LOWER BAIL model SM-LB

Adjustable Spreader Beams


Lift uneven loads and keep them level with increased safety. The Spreader Beam width ranges from 8" to 72" in 4" increments. Center clevis can be adjusted in 4" increments. Clevis slides between two 5" channels. Meets ASME B30.20-1993 standard.

MODEL NUMBER	MINIMUM SPREAD	MAXIMUM SPREAD	UPPER BAIL (W x L)	LOWER BAIL (W x L)	HEADROOM	CAPACITY (POUNDS)	NET WT. (LBS.)
SBM-25Ⓞ	8"	6'	2½" x 5"	1½" x 3"	12"	2,500	132
SBM-40Ⓞ	10"	6'	3" x 6"	2" x 4"	15"	4,000	276
SBM-80Ⓞ	12"	8'	4" x 8"	3" x 6"	22"	8,000	443
SM-UB**	ADDITIONAL UPPER BAILS						20
SM-LB**	ADDITIONAL LOWER BAILS						20

**MUST SPECIFY SPREADER BEAM SIZE AT TIME OF ORDER

Heavy Duty Load Lifter

Designed for lifting uneven awkward sized loads. Adjust bail position left or right by turning hand crank. Includes chains for connecting to load (connector links and hooks are not included). For use with overhead lifting device (sold separately). Steel construction with painted finish. Spread is 20" wide from center to center of bars.



MODEL NUMBER	OVERALL SIZE (W x H x D)	CHAIN LENGTH	OVERALL SIZE (W x H)	CAPACITY (POUNDS)	NET WT. (LBS.)
HDLL-15	26" x 9" x 2"	42"	27" x 7½"	1,500	10

Crane Scales

Accuracy, quality, durability and affordable are key attributes of the Crane Scales. Our digital hanging scales offer fast and reliable weighing in a compact and durable housing. Designed to withstand the most aggressive and heavy duty industrial lifting applications. Features: hook and shackle, rechargeable 6V battery, AC/DC power adapter, automatic shutoff and convertible gross/net weight display. Accuracy is +/- 1%. Other capacities, remote, double side display, low temp and high temp available.

New



MODEL NUMBER	DESCRIPTION	OVERALL SIZE (W x D x H)	CAPACITY (POUNDS)	NET WT. (LBS.)
SC-06	CRANE SCALES	9" x 14" x 14"	600	24
SC-2	CRANE SCALES	9" x 14" x 17"	2,000	30
SC-4	CRANE SCALES	9" x 14" x 24"	4,000	38
SC-6	CRANE SCALES	9" x 14" x 14"	6,000	46