


## Semi-Automatic Stretch Wrap Machines

Increase productivity in the shipping department or at the end of a production line. This unit is complete with a 48" diameter powered turntable and counter-balanced stretch film mast. Easy to operate, simply depress the foot pedal and manually move the mast up and down. Powered by a 115V, 1/2 HP motor with soft start/stop and variable speed control. Variable R.P.M. 3-12. Unit comes with one film rod with special spacers that can be used with any height roll of stretch wrap material between 10" and 20". Ships with mast unbolted. Some assembly required.

The Approach Ramp option allows the operator to load and unload the machine with a pallet truck (model SWA-48 only).

The Powered Mast option is available with a 24V hand control to work with those taller loads. The hand held control is used to raise/lower the film while the foot control is used to operate the turntable.

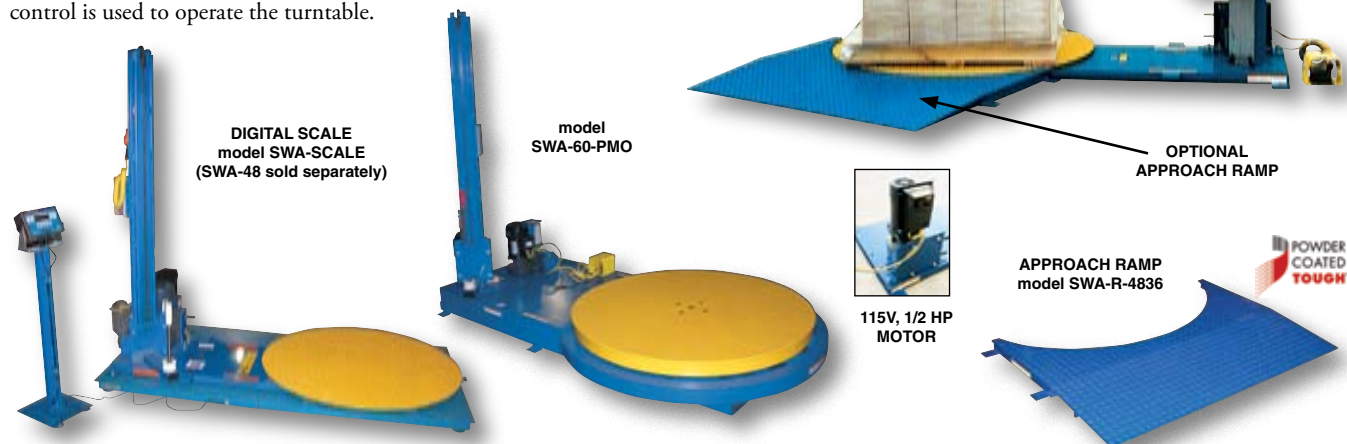

| MODEL NUMBER                                    | TURNTABLE DIAMETER  | TURNTABLE HEIGHT | CAPACITY (POUNDS) | MAXIMUM LOAD DIAMETER | MAXIMUM LOAD HEIGHT | NET WT. (POUNDS) |
|---|---|------------------|-------------------|-----------------------|---------------------|------------------|
| SWA-48  | 48"   | 2-3/8"           | 4,000             | 76"                   | 78"                 | 665              |
| SWA-54  | 54"   | 11"              | 5,000             | 86"                   | 75"                 | 1543             |
| SWA-60  | 60"   | 11"              | 5,000             | 86"                   | 75"                 | 1659             |
| SEMI-AUTOMATIC STRETCH WRAP MACHINE ACCESSORIES |   |                  |                   |                       |                     |                  |
| SWA-PMO   | POWERED MAST OPTION (FACTORY INSTALLED)   |                  |                   |                       |                     | 30               |
| SWA-PMO-RF                                      | POWERED MAST OPTION (RETROFIT - FIELD INSTALLED)  |                  |                   |                       |                     | 120              |
| SWA-SCALE*                                      | SCALE (AVAILABLE ONLY ON SWA-48 & ADDS 3" TO HEIGHT - FACTORY INSTALLED)                      |                  |                   |                       |                     | 680              |
| SWA-220V  | 220V SINGLE PHASE POWER (115V 1 PHASE STANDARD)   |                  |                   |                       |                     | ---              |
| SWA-R-4836*                                     | 48"W x 36"L x 2-3/8"H APPROACH RAMP (FOR ELECTRIC PALLET TRUCKS)                              |                  |                   |                       |                     | 223              |
| SWA-R-4848*                                     | 48"W x 48"L x 2-3/8"H APPROACH RAMP (FOR MANUAL PALLET TRUCKS)                                |                  |                   |                       |                     | 253              |
| SWA-R-4860-SCL                                  | 48"W x 60"L x 6"H APPROACH RAMP (FOR SWA-48 WITH SCALE) (FOR ELECTRIC & MANUAL PALLET TRUCKS) |                  |                   |                       |                     | 346              |
| SWA-FILM  | 20"W x 80 ga. x 6,000' x 3" CORE (ONE ROLL)   |                  |                   |                       |                     | 42               |

\*FOR USE WITH MODEL SWA-48 ONLY

## Medium Duty High Performance Semi-Automatic Stretch Wrap Machine

User friendly touch-screen control center provides workers efficient control of the wrapping process. The state of the art digital control circuit allows the operator to set the number of pallet rotations and film wrapping patterns. The operator simply ties off the film wrap on the carousel and presses the start button. When the SWA-60-AW has completed the wrapping process, the operator cuts the film wrap, and removes the wrapped pallet. The 60" round carousel has variable speed, 0-13 rpm, with soft start and stop feature. Photocell sensors automatically adjust to different pallet heights. 20" high film wrap can be set to a 240% or 340% pre-stretch with 4 standard multifunction wrapping patterns. Film not included. Ships knockdown. Some assembly required. 110V 1phase power.

| MODEL NUMBER  | TURNTABLE DIAMETER                            | TURNTABLE HEIGHT | CAPACITY (POUNDS) | NET WT. (LBS.) |
|---------------|---|------------------|-------------------|----------------|
| SWA-60-AW     | 60"   | 3-1/8"           | 4,000             | 1170           |
| SWA-60-AW-SCL | SCALE (FACTORY INSTALLED / ADDS 3" TO HEIGHT) |                  |                   | 500            |
| SWA-R-6060-AW | 39 1/2"W x 60"L x 3"H APPROACH RAMP           |                  |                   | 300            |

