


Steel Rail Chocks

Rail Chocks fit most standard size rails. Double sided flanges keep chocks on track. Hardened steel spurs, located on the bottom side of the chock, are used to maximize a positive grip. Handle projection 36" on flag chocks, 10" on non-flag chocks. Handle height is 14". The adjustable support legs are used to balance the Flag Rail Chocks. The Aluminum "Chock Your Wheels" sign is visible from both sides. Chain length is 30" on combo units. Steel construction.

| MODEL NUMBER | DESCRIPTION | NET WT. (LBS.) |
|------------------|---------------------------------------------|----------------|
| FRC-2 Ⓢ | FLAG RAIL CHOCK W/ADJUSTABLE HEIGHT LEG | 10 |
| SRC-1 Ⓢ | SINGLE RAIL CHOCK | 8 |
| SRC/FRC Ⓢ | SINGLE RAIL CHOCK / FLAG RAIL CHOCK COMBO | 18 |
| SRC/SRC Ⓢ | SINGLE RAIL CHOCK / SINGLE RAIL CHOCK COMBO | 16 |

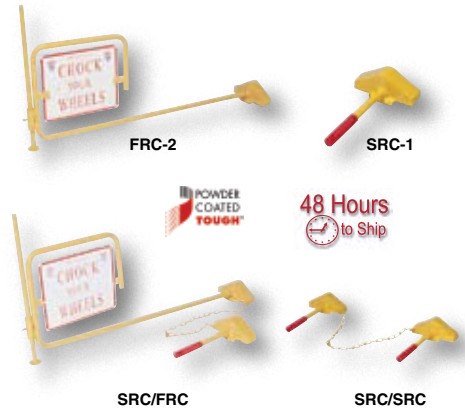

Industrial Rubber Wedges

Excellent safety when stacking cylindrical objects. These extruded rubber wedges offer several advantages over wooden blocks or other forms of wedges: its resilience avoids creasing or wrinkling paper as well as scratching or marring surfaces; it increases its grip as weight is increased.

| MODEL NUMBER | WIDTH | LENGTH | HEIGHT | NET WEIGHT (POUNDS) |
|-----------------|-------|--------|--------|---------------------|
| RBW-2 Ⓢ | 6½" | 4" | ¾" | 2 |
| RBW-3 Ⓢ | 6½" | 6" | ¾" | 3 |
| RBW-5 Ⓢ | 6½" | 12" | ¾" | 5 |
| RBW-10 Ⓢ | 6½" | 24" | ¾" | 10 |



Trailer Jacks

The trailer jack adjustable lift range provides easy hitching and unhitching of a loaded trailer. Use for a wide variety of lifting, leveling and adjustment applications. Ideal for industrial, utility, construction or agricultural equipment trailers. Heavy-duty construction. Available with a side or top crank position. Mounting bracket attaches in a variety of ways in order to meet your application needs. Scissor jacks provide leveling and stability to trailers when not attached to tow vehicle.


| TYPE | MODEL NUMBER | MOUNT | CRANK POSITION | CAPACITY (POUNDS) | LIFT RANGE | NET WT. (LBS.) |
|------|----------------|--------------------|----------------|-------------------|------------|----------------|
| A | TJ-06 | SIDE SWIVEL/WHEEL | SIDE | 1,000 | 10" | 21 |
| B | TJ-F3 | TUBE RING | TOP | 2,000 | 15" | 20 |
| C | TJ-F1 | TUBE RING | TOP | 1,000 | 10" | 25 |
| D | TJ-F2 | FLANGE | TOP | 1,000 | 10" | 27 |
| E | TJ-F4 | FLANGE | TOP | 2,000 | 15" | 21 |
| F | TJ-AF | A-FRAME | TOP | 2,000 | 10" | 19 |
| G | FJ-K1 | A-FRAME | SIDE | 1,000 | 15" | 22 |
| H | FJ-K2 | A-FRAME | SIDE | 2,000 | 15" | 19 |
| -- | CT-02 | CRANK JACK | TOP | 2,000 | 14" | 9 |
| -- | CT-05 | CRANK JACK | TOP | 5,000 | 14" | 12 |
| -- | CS-02 | CRANK JACK | SIDE | 2,000 | 14½" | 11 |
| I | NJ-BP | NOSE JACK BASE PAD | -- | -- | -- | 2 |
| J | NJ-CR | NOSE JACK CASTER | -- | -- | -- | 3 |
| K | EL-NP | ELECTRIC NOSE JACK | -- | 2,500 | 14" | 9 |
| L | SJ-7523 | SCISSOR JACK | -- | 7,500 | 23" | 15 |
| L | SJ-7529 | SCISSOR JACK | -- | 7,500 | 29" | 19 |
| M | SJ-JC | JACK CRANK HANDLE | -- | -- | -- | 1 |



Hydraulic Bottle Jacks

Ideal for use on industrial, utility, construction or agricultural equipment trailers. Use in an upright, angled or horizontal position. Our Bottle Jacks have an extender screw in the top of the cylinder that can be turned counterclockwise to extend the cylinder length. The retracted and extended heights are both affected by the amount it is unscrewed.

| TYPE | MODEL NUMBER | RETRACTED HEIGHT | EXTENDED HEIGHT | EXTENDER LENGTH | CAPACITY (TONS) | NET WT. (LBS.) |
|------|--------------|------------------|-----------------|-----------------|-----------------|----------------|
| A | J-20 | 9½" | 16" | 3½" | 20 | 41 |
| B | J-10 | 8" | 13½" | 3½" | 10 | 26 |
| C | J-5 | 8" | 13" | 3½" | 5 | 19 |
| D | J-3 | 7¾" | 13" | 2½" | 3 | 13 |
| E | J-2 | 6½" | 10" | 2¾" | 2 | 9 |

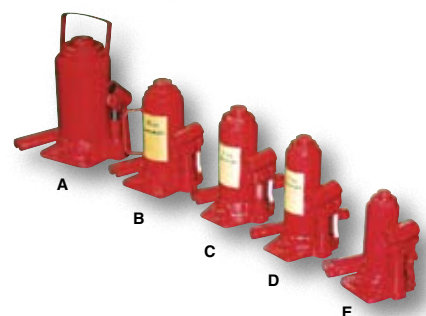

LOADING DOCK EQUIPMENT