

Aluminum Walk Ramps

Enables delivery men, shippers, and receivers to load and unload trucks when docks are unavailable. Ramps feature a 1½" high safety curb on each side. Heavy-duty steel chains with steel grab hooks are attached to each side of ramp for safely securing ramp to truck. Constructed of strong aluminum alloy with non-skid tread surface. The ramp is lightweight and easy to handle. Available in either an overlapping style that rests on the truck bed, suffix "A", or steel hook style that mounts onto the truck extensions, suffix "B".



TYPE A - OVERLAP



TYPE B - STEEL HOOKS




DECK CROSS-SECTION

TYPE	HEIGHT RANGE	LENGTH	CAPACITY (POUNDS)		28" WIDE / 26" USABLE		38" WIDE / 36" USABLE	
			4-WHEEL CART	2-WHEEL CART	MODEL NUMBER	NET WT. (LBS.)	MODEL NUMBER	NET WT. (LBS.)
A	6" - 21"	6'	2,800	2,000	AWR-28-6A	76	AWR-38-6A	97
A	6" - 25"	7'	2,800	1,800	AWR-28-7A	88	AWR-38-7A	112
A	6" - 29"	8'	2,500	1,650	AWR-28-8A	100	AWR-38-8A	125
A	6" - 33"	9'	2,500	1,600	AWR-28-9A	112	AWR-38-9A	142
A	6" - 38"	10'	2,200	1,500	AWR-28-10A	124	AWR-38-10A	157
A	6" - 46"	12'	1,900	1,400	AWR-28-12A	148	AWR-38-12A	187
A	6" - 54"	14'	1,600	1,200	AWR-28-14A	172	AWR-38-14A	217
A	6" - 62"	16'	1,000	1,000	AWR-28-16A	196	AWR-38-16A	227
B	6" - 23"	6'	2,800	2,000	AWR-28-6B	76	AWR-38-6B	97
B	6" - 27"	7'	2,800	1,800	AWR-28-7B	88	AWR-38-7B	112
B	6" - 31"	8'	2,500	1,650	AWR-28-8B	100	AWR-38-8B	125
B	6" - 35"	9'	2,500	1,600	AWR-28-9B	112	AWR-38-9B	142
B	6" - 40"	10'	2,200	1,500	AWR-28-10B	124	AWR-38-10B	157
B	6" - 48"	12'	1,900	1,400	AWR-28-12B	148	AWR-38-12B	187
B	6" - 54"	14'	1,600	1,200	AWR-28-14B	172	AWR-38-14B	217
B	6" - 64"	16'	1,000	1,000	AWR-28-16B	196	AWR-38-16B	227

Aluminum Grip-Strut Walk Ramps

Load and unload trucks when docks are unavailable. The open deck design allows snow, ice and water to fall through ramp providing a positive grip for delivery men, shippers and receivers. 100% welded aluminum construction is lightweight and will not rust. Ramps feature a 2" high safety curb on each side. Overlap style end lip rests on the trailer bed to provide a smooth transition. Each unit includes two safety chains to connect the ramp to the trailer for safety.

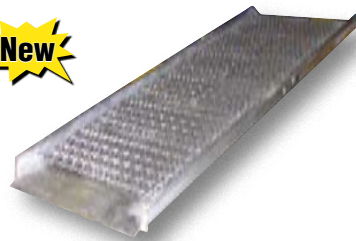

HEIGHT RANGE	LENGTH	CAPACITY (POUNDS)		28" WIDE / 26" USABLE		38" WIDE / 36" USABLE	
		4-WHEEL CART	2-WHEEL CART	MODEL NUMBER	NET WT. (LBS.)	MODEL NUMBER	NET WT. (LBS.)
6" - 21"	6'	2,800	2,000	AWR-G-28-6A	43	AWR-G-38-6A	49
6" - 25"	7'	2,800	1,800	AWR-G-28-7A	45	AWR-G-38-7A	53
6" - 29"	8'	2,500	1,650	AWR-G-28-8A	48	AWR-G-38-8A	57
6" - 33"	9'	2,500	1,600	AWR-G-28-9A	51	AWR-G-38-9A	61
6" - 38"	10'	2,200	1,500	AWR-G-28-10A	53	AWR-G-38-10A	65
6" - 46"	12'	1,900	1,400	AWR-G-28-12A	58	AWR-G-38-12A	72
6" - 54"	14'	1,600	1,200	AWR-G-28-14A	64	AWR-G-38-14A	80
6" - 62"	16'	1,000	1,000	AWR-G-28-16A	69	AWR-G-38-16A	88


Aluminum Walk Ramp Options



Adjustable Height Wheel Option, is ideal for use with aluminum ramps 8 feet or longer. Height is adjusted with a manual hand crank mechanism. Wheels are 10" x 3½" pneumatic and are located at balance points on the ramp. Simple bolt-on installation. Minimum ramp lowered height with this option is 12". Walk ramp sold separately.

model AWR-WHL

Ramp Cart Option, provides for easy one-person ramp positioning and transporting. Pull handle up to vertical position to rotate and lock wheels in down position. Push handle down to unlock and lift wheels so ramp can be used to service lower trailers. Hard rubber wheels measure 10" x 2½". Minimum ramp service height is 14" with this option. Easy bolt-on installation. Walk ramp sold separately.



model AWR-R-CART