

Heavy-Duty Cantilever Racking (continued)



BRACE SETS

BRACE SETS (set of two)			
MODEL NUMBER	UPRIGHT HEIGHT	LENGTH	NET WT. (LBS.)
HB-C-8-3	96"	36"	29
HB-C-8-4	96"	48"	35
HB-C-8-5	96"	60"	42
HB-C-8-6	96"	72"	54
HB-C-8-7	96"	84"	61
HB-C-8-8	96"	96"	69

BRACE SETS (set of three)			
MODEL NUMBER	UPRIGHT HEIGHT	LENGTH	NET WT. (LBS.)
HB-C-14-3	120" - 168"	36"	44
HB-C-14-4	120" - 168"	48"	54
HB-C-14-5	120" - 168"	60"	64
HB-C-14-6	120" - 168"	72"	84
HB-C-14-7	120" - 168"	84"	95
HB-C-14-8	120" - 168"	96"	107




Carton Flow Rack

Cartons are gravity fed on rollers for convenient first in / first out stock rotating. Choose the quantity of levels that best fits your application. Each level has 1,000 pound capacity and includes four pairs of rollers with 50 pounds per foot capacity. The width of each level is 96". All models are 84" high. Assembly required. Units can be bolted together for additional depth.

MODEL NUMBER	WIDTH OF LEVELS	OVERALL HEIGHT	OVERALL DEPTH	QUANTITY OF FLOW LEVELS	NET WT. (POUNDS)
FLOW-3-3	96"	84"	36"	3	230
FLOW-3-4	96"	84"	36"	4	290
FLOW-3-5	96"	84"	36"	5	310
FLOW-4-3	96"	84"	48"	3	245
FLOW-4-4	96"	84"	48"	4	305
FLOW-4-5	96"	84"	48"	5	370




STORAGE SOLUTIONS

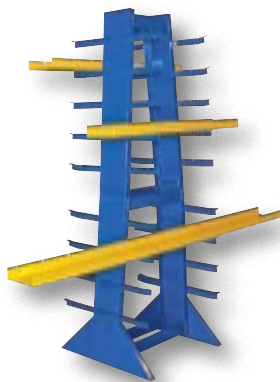

Double Sided Horizontal Bar Rack

Ideal for use in maintenance departments, tool rooms, machine shops, and storage areas. Arms extend and act as dividers creating bays of storage. Nine arm levels of varying lengths can store material up to 10 feet long. Aligning two units next to each other will allow for the storage of longer material. Arm edges are sloped upward to prevent roll off's. Arms are welded at 6" increments with 6" between levels. Total rack capacity is an 2,600 pounds evenly distributed load. Unit is supplied with lag down points and ship knockdown. Steel construction.

MODEL NUMBER	OVERALL WIDTH	OVERALL DEPTH	OVERALL HEIGHT	ARM LEVELS	DISTANCE BETWEEN LEVELS	NET WT. (POUNDS)
DSHZ-4	30"	30"	83¾"	9	6"	110

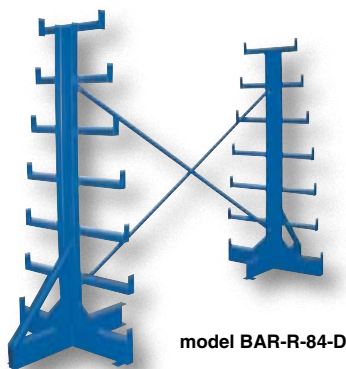

model BAR-R-84-D

Single/Dual Sided Bar Stock Trees

Starter unit includes two uprights and one set of cross braces. Storage room is increased when the add-on unit is ordered. Add-on unit consists of one upright and one set of cross braces for joining to the starter set. Capacity is 2,000 pounds per level and 500 pounds per arm. Distance between levels is 10". There are 6 arm levels. Choose either single sided or double sided rack. Steel construction.

MODEL NUMBER	STYLE	DESCRIPTION	OVERALL SIZE (W x D x H)	NET WT. (POUNDS)
BAR-R-S	SINGLE SIDED	STARTER UNIT	130" x 38½" x 80½"	253
BAR-R-D	DOUBLE SIDED	STARTER UNIT	130" x 38½" x 80½"	322
BAR-A-S	SINGLE SIDED	ADD-ON UNIT	130" x 38½" x 80½"	120
BAR-A-D	DOUBLE SIDED	ADD-ON UNIT	130" x 38½" x 80½"	155