

Dock Seal & Dock Shelter Survey Sheet

Company Name _____
 Contact Name _____
 Phone Number _____
 Fax Number _____
 (W) Width of Opening _____ (inches)
 (H) Height of Opening _____ (inches)
 (LC) Left Clearance _____ (inches)
 (RC) Right Clearance _____ (inches)
 (TC) Top Clearance _____ (inches)
 (E) Extension from Building _____ (inches)
 (DB) Dock Bumper Projection _____ (inches)
 (DH) Dock Height _____ (inches)



Is this door next to another door that requires a Dock Seal/Shelter? _____
 Will/Does this door have a face mounted Edge-O-Dockleveler? _____

Special Size Trailers

Highest Trailer _____ (inches)
 Lowest Trailer _____ (inches)
 Widest Trailer _____ (inches)
 Narrowest Trailer _____ (inches)

Building with Sloped Dock Approach

(A) Distance between trailer and building at point A _____ (inches)
 (B) Distance between trailer and building at point B _____ (inches)

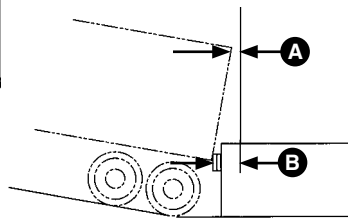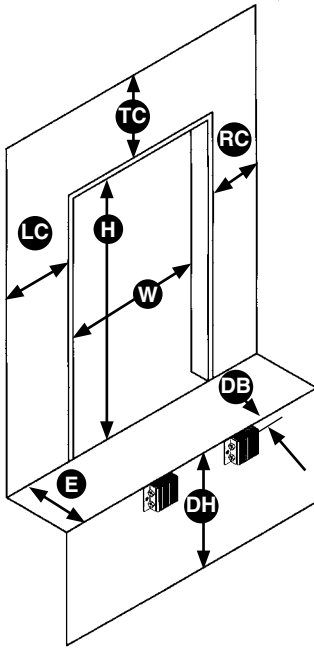

DOCK SEAL AND SHELTER OPTIONS	
MODEL NUMBER	DESCRIPTION
D-FHPFS	Full Height Pleats, Full Height Guide Stripes
D-FHPS	Full Height Pleats, Standard Guide Stripes (24" High)
D-AP	Armor Pleats, Top 24" Only
D-54OZ	54 Ounce Material - Face Only
D-18H	18" Header
D-SV	Sloped Verticals
D-BBF	Bottom Bun
D-BBFB	Bottom Bun with Bumpers
D-GS	Full Height Guide Stripes
D-12F	12" Flap
D-SIDE	Dock Seal Sides Between 97" & 120"
D-KIT	Repair Kit

Retractable Dock Shelter

The Retractable Dock Shelter fits up to a 120"W x 120"H door. Independent spring loaded scissors mechanism allows shelter to retract with the trailer keeping the shelter square. The design also eliminates the need for rigid steel guide protectors. Overall size 132"W x 126"H x 24" projection. The 40 ounce reinforced vinyl flaps close the opening down to 90" x 90". The 36" header curtain has armor pleats for extended wear. Shelter is black with aluminum edge trim.

MODEL NUMBER	PROJECTION	OVERALL HEIGHT	OVERALL WIDTH	NET WT. (POUNDS)
D-520-24	24"	126"	132"	437

Dock Bug Screen Doors

Improve employee comfort while increasing productivity. Use at loading docks, garages, and food processing facilities. Keeps birds, flies, moths, mosquitoes, wasps and other insects out while providing fresh air ventilation, sunlight and increased security. Constructed of durable, all weather vinyl coated polyester that is fire retardant as well as mildew and UV resistant. Easy to install. Screen can be attached to the top of the doorway opening, or mounted to the inside wall. Each method uses a simple manual roller and track system that allows the screen to slide smoothly from side to side. Roll-up design is also available, contact factory for details.

MODEL NUMBER	DOOR SIZE (W x H)	MOUNT	NET WT. (POUNDS)
DBS-88-H	8' x 8'	In Jamb	54
DBS-810-H	8' x 10'	In Jamb	84
DBS-1010-H	10' x 10'	In Jamb	97
DBS-88-W	8' x 8'	Mounts on Inside Wall	96
DBS-810-W	8' x 10'	Mounts on Inside Wall	114
DBS-1010-W	10' x 10'	Mounts on Inside Wall	132

LOADING DOCK EQUIPMENT

