

Steel Truck Dockboards

48 Hours
to Ship

DVD or VIDEO
AVAILABLE



LEVERLIFT
STANDARD


- Bend is 11° and 9" from Beveled Edge / Legs are 12" from Edge
- Treadplate Design Ensures Positive Traction
- Designed for Medium/High Traffic Applications

Constructed of high strength (55,000 psi) steel for long life. Beveled edges on both ends permit smooth entry and exit. Deck is diamond plated for safe, efficient use. Welded safety curbs for maximum strength. Locking legs minimize ramp movement and are uneven to allow the dockboard to sit canted for easier floor pickup by fork trucks. Standard with leverlift for quick portability with fork truck. Optional accessories: lifting chains, span locks, span pins/holes and removable pickup loops. Manufactured in compliance with OSHA.

LOADING DOCK EQUIPMENT

CAPACITY			10,000 LBS.		15,000 LBS.		20,000 LBS.	
Size (Inches) Width x Length	Ht. Difference 11° / 19% Inches		MODEL NUMBER	NET WT. (LBS.)	MODEL NUMBER	NET WT. (LBS.)	MODEL NUMBER	NET WT. (LBS.)
60 36	5		TS-10-6036	261	TS-15-6036	326	TS-20-6036	333
60 48	7		TS-10-6048	368	TS-15-6048	426	TS-20-6048	435
60 60	10		TS-10-6060	525	TS-15-6060	537	TS-20-6060	695
60 72	12		TS-10-6072	597	TS-15-6072	635	TS-20-6072	791
66 36	5		TS-10-6636	318	TS-15-6636	353	TS-20-6636	359
66 48	7		TS-10-6648	396	TS-15-6648	461	TS-20-6648	470
66 72	12		TS-10-6672	647	TS-15-6672	686	TS-20-6672	855
72 36	5		TS-10-7236	326	TS-15-7236	347	TS-20-7236	417
72 48	7		TS-10-7248	426	TS-15-7248	496	TS-20-7248	551
72 54	8-1/2		TS-10-7254	556	TS-15-7254	575	TS-20-7254	654
72 60	10		TS-10-7260	678	TS-15-7260	698	TS-20-7260	723
72 72	12		TS-10-7272	721	TS-15-7272	742	TS-20-7272	919
84 36	5		TS-10-8436	432	TS-15-8436	452	TS-20-8436	563
84 48	7		TS-10-8448	567	TS-15-8448	567	TS-20-8448	741
84 60	10		TS-10-8460	671	TS-15-8460	702	TS-20-8460	878
Size (Inches) Width x Length	Ht. Difference 11° / 19% (In)		25,000 LBS.		30,000 LBS.			
60 36	5		TS-25-6036	447	TS-30-6036	467	<ul style="list-style-type: none"> • Standard with Leverlift • Chain Pickup and Use Suffix (-C) (no leverlift) • Span Locks and Use Suffix (-SL) • Call Us for Special Sizes and Configurations. 	
60 48	7		TS-25-6048	562	TS-30-6048	582		
60 60	10		TS-25-6060	695	TS-30-6060	798		
60 72	12		TS-25-6072	791	TS-30-6072	952		
66 36	5		TS-25-6636	483	TS-30-6636	554		
66 48	7		TS-25-6648	607	TS-30-6648	730		
66 72	12		TS-25-6672	855	TS-30-6672	1032		
72 36	5		TS-25-7236	518	TS-30-7236	596		
72 48	7		TS-25-7248	651	TS-30-7248	786		
72 54	8-1/2		TS-25-7254	729	TS-30-7254	841		
72 60	10		TS-25-7260	807	TS-30-7260	931		
72 72	12		TS-25-7272	919	TS-30-7272	1111		
84 36	5		TS-25-8436	563	TS-30-8436	681		
84 48	7		TS-25-8448	741	TS-30-8448	858		
84 60	10		TS-25-8460	878	TS-30-8460	1065		

Steel Truck Dockplates

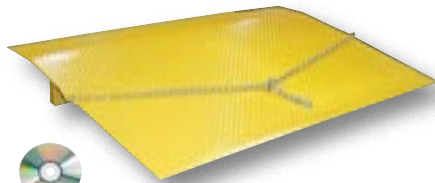

DVD or VIDEO
AVAILABLE

Constructed of high strength INX-55 (55,000 psi) steel. Safety locking legs prevent slippage between truck and dock. Raised pattern safety treadplate helps provide positive traction. Beveled edges for smooth entry and exit. Chain pickup comes standard on all units. Designed with an 11° bend located 9" from the beveled edge. The legs are 12" from the beveled edge. Manufactured in compliance with OSHA.

OVERALL WIDTH	OVERALL LENGTH	HEIGHT DIFF.	3/8" PLATE THICKNESS			1/2" PLATE THICKNESS		
			MODEL NUMBER	CAPACITY (LBS.)	NET WT. (LBS.)	MODEL NUMBER	CAPACITY (LBS.)	NET WT. (LBS.)
48"	30"	4"	SE-4830	5,000	221	SEH-4830	8,800	282
48"	36"	5"	SE-4836	4,125	250	SEH-4836	7,300	330
48"	48"	7"	SE-4848	3,090	324	SEH-4848	5,500	429
48"	60"	9"	SE-4860	2,475	399	SEH-4860	4,400	528
54"	30"	4"	SE-5430	5,500	235	SEH-5430	9,900	314
54"	36"	5"	SE-5436	4,600	277	SEH-5436	8,250	371
54"	48"	7"	SE-5448	3,450	361	SEH-5448	6,185	486
54"	60"	9"	SE-5460	2,760	444	SEH-5460	4,950	575
60"	36"	5"	SE-6036	5,150	306	SEH-6036	9,160	404
60"	48"	7"	SE-6048	3,860	400	SEH-6048	6,875	526
60"	60"	9"	SE-6060	3,090	498	SEH-6060	5,500	619