

Sheetrock™ Lay-In Ceiling Panel *ClimaPlus™*



10
Year Availability
3270



SHEETROCK Lay-In Ceiling Panel, Vinyl, with *CLIMAPLUS* Performance/
DONN ZXLA Suspension System

LEED Credits
Recycled Content: 23% - 56%
CLIMAPLUS No-Sag Warranty

MR				EQ		
Waste Reduction	Recycled Content	Regional Materials ¹	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
	●	●	●	●	●	●

Features and Benefits


- PVC-FREE panels feature a proprietary non-vinyl face material that is free of PVC and Phthalates
- CLEAN ROOM™ panels can be used in clean room environments up to class 100
- Washable and Scrubbable finish—Impact, Scratch and Soil Resistant
- Panels meet USDA/FSIS requirements for food processing areas
- *CLIMAPLUS™* 30-year lifetime no-sag system warranty

Applications

- Kitchens and food preparation areas
- Restrooms and utility areas
- Locker rooms
- Parking garages
- Exterior protected soffits

Substrate

- Gypsum panel

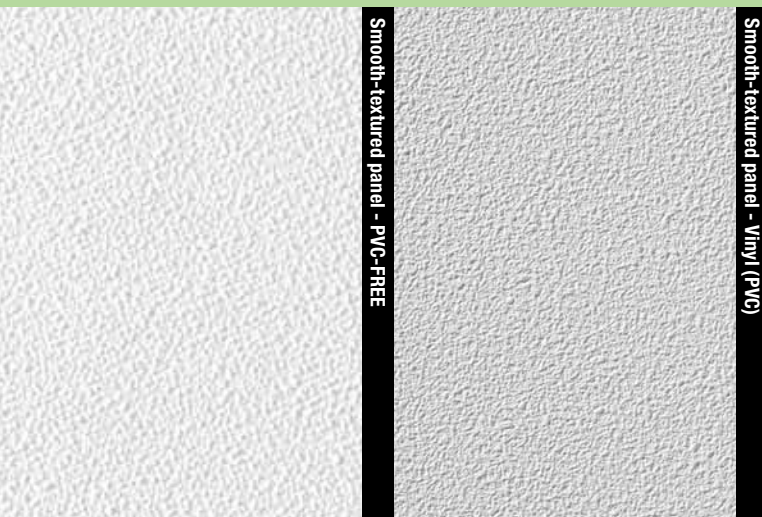

Smooth-textured panel - PVC-FREE

Smooth-textured panel - Vinyl (PVC)

Call 888.874.2450 for color samples



White

Sheetrock® Lay-In Ceiling Panel *ClimaPlus™*

Web Sites: usg.com
usgdesignstudio.com
sustainableceilings.com
seismicceilings.com

Technical Service 800 USG.4YOU
Samples/Literature 888 874.2450
Samples/Literature Fax 888 874.2348
Customer Service 800 950.3839

See usg.com for the most up-to-date product information.

UL Classified												
30 Year System Warranty – No visible sag	Edge	Panel Size	Class ²	Item No.	NRC ³	CAC Min.	LR ⁴	Color	Abuse-Resistant	Grid Options	Recycled Content	Panel Cost
SHEETROCK Lay-In Ceiling Panel CLIMAPLUS, Vinyl	SQ 	2'x2'x1/2"		3260	—	35	.77	White		A, B, C, D	23%	\$
		2'x4'x1/2"		3270	—	40	.77	White		A, B, C, D	23%	\$
SHEETROCK Lay-In Ceiling Panel CLIMAPLUS, PVC-FREE	SQ 	2'x2'x1/2"		3220	—	35	.85	White		A, B, C, D	56%	\$
		2'x4'x1/2"		3230	—	40	.85	White		A, B, C, D	56%	\$
SHEETROCK Lay-In Ceiling Panel CLIMAPLUS, CLEAN ROOM⁶	SQ 	2'x4'x1/2"		3200	—	40	.77	White		A, B, C, D	23%	\$\$
	A DONN [®] DX [®] /DXL [™]	B DONN [®] DXLA [™]	C ZXLA [™]	D DONN CE ^{™7}								
Grid Profile Options												

Physical Data/ Footnotes

Product literature
Data sheet: SC1820

ASTM E1264 classification
Type XX, Pattern G

ASTM E84 surface burning characteristics
Class A

Vinyl
Flame spread: 25
Smoke developed: 50
PVC-Free
Flame spread: 25
Smoke developed: 50
CLEAN ROOM
Flame spread: 25
Smoke developed: 50

Weight
1/2" = 2.00 lb./sq. ft.

Thermal resistance
1/2" = up to R-0.45

Maximum backloading
See Warranty for details.

Maintenance
Can be cleaned easily with a damp sponge. Use mild detergent and water – do not use acetate, ammonia or high concentration of chlorine, bromide or other harsh chemicals.

U.S. Coast Guard acceptance
Approved for use on merchant ships.

Footnotes

1. Dependent on location; see Sustainability selector.
2. Fire-rated items: see UL design details.
3. NRC rating is .10. USG does not consider a ceiling panel to be acoustically rated if NRC is less than .50

4. LR values are shown as averages.

5. For details, see Sustainability selector.

6. Field-cut edges of CLEAN ROOM panels must be sealed with white latex paint.

7. Clean-room-rated applications require a suspension system with gasketed tee flanges such as DONN CE.

8. High Scrubbability/High Washability – PVC-FREE panels have been tested to withstand 10,000 scrub/wash cycles (ASTM D2486/ASTM D4828)



Manufactured by USG Interiors, Inc.
550 West Adams Street
Chicago, IL 60661

The following are trademarks of USG Interiors, Inc. or a related company: CE, CLEAN ROOM, CLIMAPLUS, DONN, DX, DXL, DXLA, FIRECODE, SHEETROCK, USG, ZXLA.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read MSDS and literature before specification and installation.

SC1820/rev. 10-09
© 2009, USG Interiors, Inc.
Printed in U.S.A.