




RadarsTM ClimaPlusTM



Medium textured panel

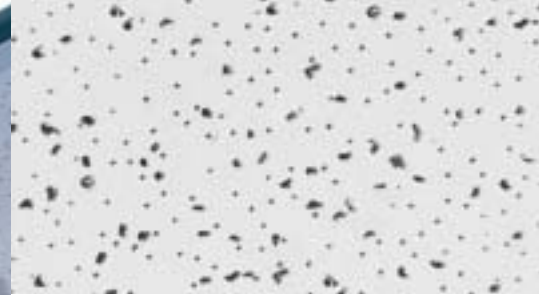

Features and Benefits

- Non-directional pattern with a fresh, clean appearance offers fast, efficient installation.
- Select items available in Standard Colors.
- CLIMAPLUSTM 15-year System Warranty to withstand conditions up to 104 °F (40 °C)/90% relative humidity without visible sag when used with USG's DONN[®] Brand Suspension Systems.
- Optional FIRECODETM formulation designed to meet life safety codes.

Applications

- Schools
- Corridors
- Lobby areas
- Offices
- Retail stores

RADARTM Panels with CLIMAPLUSTM Performance/Donn[®] Brand DX[®]/DXLTM Suspension System

RadarsTM

ClimaPlusTM

Acoustical Ceilings

Technical Service 800 USG.4YOU
 Web Site www.usg.com
 Samples/Literature 888 874.2450
 Samples/Literature Fax 888 874.2348
 Customer Service 800 950.3839
 Literature Number SC2127



RADARTM
 CLIMAPLUSTM Panels

Edge	Panel Size		Item No. UL Classified				Color ⁴	Grid Options	Recycled Content ⁵	Panel Cost		
	Imperial	Metric (mm) ¹	Class ²	Imperial	NRC	CAC Min.					LR ³	
 (SQ)	2' x2' x5/8"		Class A	2210	.55	33	.84	White Standard	A, B	38%	\$	
	2' x2' x5/8"			2215	.55	35	.84	White	A	50%	\$	
	2' x4' x5/8"		Class A	2410	.55	35	.84	White Standard	A	38%	\$	
	600x1200x15			ME2410 ¹								
	2' x4' x5/8"			2415	.55	35	.84	White Flat Black	A	50%	\$	
	(SLT)	2' x2' x5/8"		Class A	2220	.55	35	.84	White Standard	C	38%	\$
		600x600x15			ME2220 ¹			Flat Black not available				
	2' x2' x5/8"			2225	.55	35	.84	White	C	50%	\$	
	2' x4' x5/8"		Class A	2420	.55	35	.84	White	C	38%	\$	
	2' x4' x5/8"			2425	.55	35	.84	White	C	50%	\$	
	(FLB)	2' x2' x5/8"	Class A	2230	.55	35	.84	White	D, F, G	38%	\$	
RADAR CLIMAPLUS Tile	(SF) ⁶	12'x12'x5/8"	Class A	2570	.45 ⁷	35	.84	White	Adhesive Staple	38%	\$\$\$	

Grid Profile Options	A DONN [®] DX [®] / DXL [™]	B CENTRICITEE [™]	C DONN DX/DXL	D CENTRICITEE	E CENTRICITEE DXLT	F FINELINE [®] 1/8	G FINELINE	H FINELINE DXLF

ASTM E1264 classification
 Type III, Form 2, Pattern CD
ASTM E84 surface burning characteristics
 Class A
 Flame spread: 25
 Smoke developed: 10

Weight
 0.69-0.81 lb./ft.² (Class A panels and tile)
 1.15 lb./ft.² (FIRECODE[™] panels)
Thermal resistance
 R-1.4 (5/8" panels and tile)

Maximum backloading
 See warranty for details.
Maintenance
 Can be cleaned easily with a soft brush or vacuum.

Footnotes
 1. Metric available in White only.
 2. Fire-rated items: see UL design details.
 3. LR values are shown as averages.
 4. See color selectors for more information.
 5. For details, see the Recycled Content selector.
 6. SF = staple flange.
 7. Not UL Classified for acoustics.

SAFETY FIRST!
 Follow good safety practices. Read material safety data sheets and related literature on products before specification and/or installation.



Manufactured by
 USG Interiors, Inc.
 125 South Franklin Street
 Chicago, IL 60606

The following are trademarks of USG Interiors, Inc. or a related company:
 CENTRICITEE, CLIMAPLUS, DONN, DX, DXL, FINELINE, FIRECODE, RADAR, USG.

SC2127/rev. 6-04
 © 2004, USG Interiors, Inc.
 Printed in U.S.A.