



PANZ Metal Ceiling Panels (FL edge) in Flat White/  
DONN CENTRICITEE DXT Suspension System

### LEED Credits

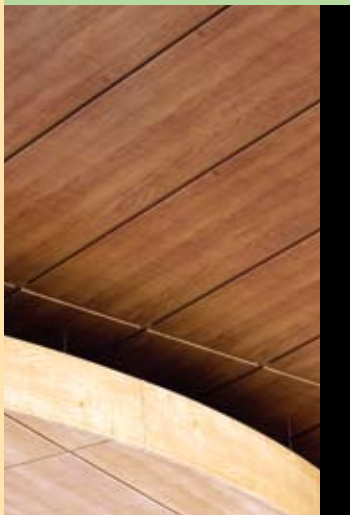
MR				EQ		
Waste Reduction	Recycled Content	Regional Materials <sup>1</sup>	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance <sup>2</sup>
●	●	●				●

### Features and Benefits

- Simple lay-in design provides 100% access.
- ACOUSTIBOND® sound backer produces .65 NRC without additional acoustical material when panels are installed within an enclosed plenum (minimum plenum depth: 18”).
- Available in numerous perforation patterns.
- Creates reveal edge on field-cut panel.
- Available with same edge details as USG acoustical panels.

### Applications


- Computer and utility rooms
- Entertainment
- Gaming
- Frequently accessed plenums



### Call 888.874.2450 for color samples


See IC415 for color and perforation availability.

#### Diamondflex<sup>2</sup>



Louvered Bright White

Louvered Bright Silver



Sheer Bright White

Sheer Bright Silver

#### Painted Metals



Flat White


Silver Satin 002

Metallic Copper 1690

Metallic Gold 1691

Metallic Oyster 1652

#### Premium Metals



Aged Copper 1017

Etched Ice Dark 1016

Etched Ice Light 1015

#### Wood Tones




Cherry

Maple

Oak

#### Anodized Metals



Brushed Aluminum PIA12




Polished Aluminum PM61







Polished Brass PM21

Satin Chrome PM614

<b>Product Information</b>		
<b>Materials</b>	<b>Typical Sizes</b>	<b>Finishes</b>
Panels: Aluminum	2' x 2', 2' x 4', 4' x 4'	2' x 2' panels available with perforation and/or embossing.

<b>Acoustics</b>	<b>Description</b>	<b>Optional Acoustical Material</b>	<b>Sound Rating – NRC</b>	
			<b>Perforation A062</b>	<b>Perforation A116</b>
	Perforated panel	ACOUSTIBOND backer <sup>4</sup>	.65	.70
	Perforated panel	1-1/2", 6 lb. density fiberglass	.90	.95
	Perforated panel	2", .75 lb. fiberglass in poly bag	.85	.90

<b>Panels</b>	<b>Smooth Panel</b>	<b>Perforated Panel</b>	<b>Perforated Panel with ACOUSTIBOND<sup>3</sup> Backer</b>
			

<b>Edge Details</b>	<b>Square Edge with 15/16" DX<sup>®</sup>/DXL<sup>™</sup> Suspension</b>	<b>Square Edge with 9/16" CENTRICITEE<sup>™</sup> DXT Suspension</b>	<b>Shadowline Edge with 15/16" DX/DXL Suspension</b>	<b>Fineline Edge with 9/16" CENTRICITEE DXT Suspension</b>
				
	<b>Fineline Edge with 9/16" FINELINE<sup>®</sup> DXF Suspension</b>	<b>Fineline Edge with 9/16" FINELINE<sup>®</sup> 1/8 DXFF Suspension</b>		
				

**For More Information**

**Product literature**  
System brochure: IC415  
Data sheet: IC314

**Online tools**  
usgdesignstudio.com

**Light reflectance**  
Flat White: LR-0.8  
(less with perforations).

**Recycled content**  
PANZ aluminum panels: 70% recycled content.

**Footnote**  
1. Dependent on location; contact your USG representative.  
2. Requires perforation and ACOUSTIBOND backer.  
3. ACOUSTIBOND backer not standard with DIAMONDFLEX panels.