

**Features and Benefits**

- Cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- Combine 12"x12" tile with USG's DONN® DX Concealed Suspension System to create a monolithic ceiling surface.

**Applications**











- Administrative offices
- Schools
- Financial institutions
- Religious buildings
- Restaurants










# “F” Fissured™

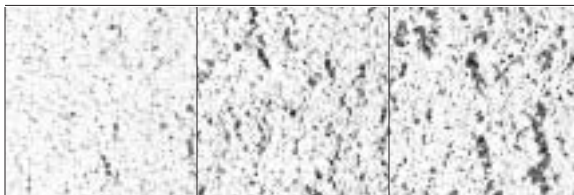
Acoustical Ceilings

Technical Service 800 USG.4YOU  
 Web Site www.usg.com  
 Samples/Literature 888 874.2450  
 Samples/Literature Fax 888 874.2348  
 Customer Service 800 950.3839  
 Literature Number SC1816

UL Classified

Edge	Panel Size	Class	Item No.	NRC	CAC Min.	LR <sup>1</sup>	Color	Grid Options	Recycled Content <sup>2</sup>	Panel Cost
“F” FISSURED™ Panels 	2' x2' x3/4"	Class A	131	.70 	35	.79	White	A, B, C	67%	\$\$
	2' x4' x3/4"	Class A	135	.70 	35	.79	White	A, B	67%	\$\$
	2' x2' x3/4"	Class A	132	.70 	35	.79	White	D	67%	\$\$
	2' x4' x3/4"	Class A	136	.70 	35	.79	White	D	67%	\$\$
(FL) 	2' x2' x3/4"	Class A	133	.70 	35	.79	White	E, F, G	67%	\$\$
“F” FISSURED Tile <sup>3</sup> 	12" x12" x3/4"	Class A	102	.70 	25	.79	White	H	67%	\$\$\$\$
	12" x12" x3/4"	Class A	101	.70 	25	.79	White	I	67%	\$\$\$\$

A DONN® DX®/ DXL™	B DONN DXW™	C CENTRICITEE™	D DONN DX/DXL	E CENTRICITEE	F FINELINE® 1/8	G FINELINE	H DONN DX/DXL Concealed	I DONN DX/DXL Concealed
								



Composite of “F” FISSURED ceiling products shows range to be expected in a production lot, and possibly in the same panel or tile. Ranges are random and cannot be specified. Texture appearance will vary based on ceiling height, installation methods, and natural variations of the product.

**ASTM E1264 classification**  
 Type III, Form 4, Pattern D  
**ASTM E84 surface burning characteristics**  
 Class A  
 Flame spread: 25  
 Smoke developed: 15

**Weight**  
 1.70 lb./ft.<sup>2</sup>  
**Thermal resistance**  
 R-1.6  
**Maximum backloading**  
 See Warranty for details.  
**Maintenance**  
 Can be cleaned easily with a soft brush or vacuum.

**Texture**  
 The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production date code.

**Footnotes**  
 1. LR values are shown as averages.  
 2. For details, see the Recycled Content selector.  
 3. Contact USG for adhesive recommendations for 12" x 12" glue-up applications.

**Safety First!**  
 Follow good safety practices. Read material safety data sheets and related literature on products before specification and/or installation.



Manufactured by  
 USG Interiors, Inc.  
 125 South Franklin Street  
 Chicago, IL 60606

The following are trademarks of USG Interiors, Inc. or a related company: CENTRICITEE, CLIMAPLUS, DONN, DX, DXL, DXW, “F” FISSURED, FINELINE, USG.

SC1816/rev. 6-04  
 © 2004, USG Interiors, Inc.  
 Printed in U.S.A.