



PEBBLED Panels with *CLIMAPLUS* Superior Performance/  
DONN DX/DXL Suspension System

**LEED Credits**

Recycled Content: 34%  
*CLIMAPLUS* Superior Performance for Mold/Mildew

MR			EQ			
Waste Reduction <sup>1</sup>	Recycled Content	Regional Materials <sup>2</sup>	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
●	●	●	●	●	●	●

**Features and Benefits**


- Economical, medium-textured ceiling panel has upscale appearance.
- *CLIMAPLUS* 30-year lifetime system warranty to withstand conditions up to 104 °F (40 °C)/95% relative humidity without visible sag when used with a DONN® brand suspension system.

**Applications**

- Schools
- Corridors
- General offices
- Retail stores

**Substrate**

- Water-felted mineral fiber

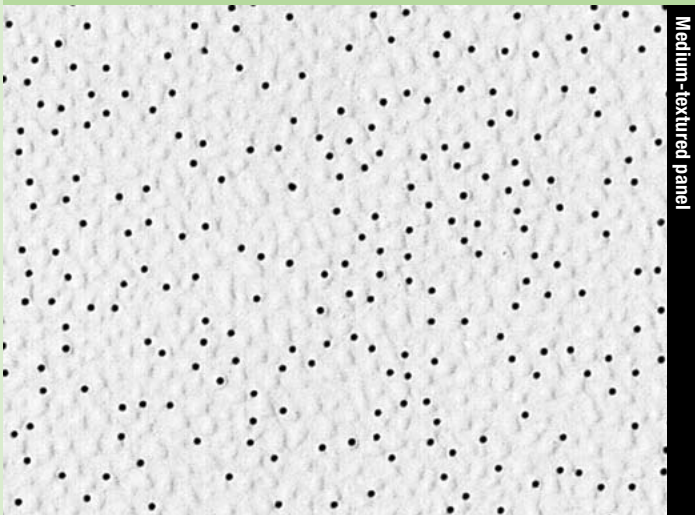

Medium-textured panel

Call 888.874.2450 for samples



White

**30**  
 Year System Warranty  
 - No visible sag  
 - Mold/mildew protection

UL Classified													
Edge	Panel Size	Class	Item No.	NRC	CAC Min.	LR <sup>3</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content <sup>4</sup>	Panel Cost	
<b>PEBBLED CLIMAPLUS Panels</b>	SQ 	2' x2' x5/8"	Class A	<b>4801</b>	.55	35	.86	White	A, B, C	Low		34%	\$
		2' x4' x5/8"	Class A	<b>4800</b>	.55	35	.86	White	A, B	Low		34%	\$
	SLT 	2' x2' x5/8"	Class A	<b>4805</b>	.55	35	.86	White	D	Low		34%	\$
	FLB 	2' x2' x5/8"	Class A	<b>4867</b>	.55	35	.86	White	E, F, G	Low		34%	\$

**Legend**

**Low Emissions (VOC Class)**

Classified as low-emitting per standards established by the Collaborative for High-Performance Schools (CHPS), following California Specification 01350 testing methods.

**CLIMAPLUS Superior Performance<sup>5</sup>**

Contains a broad-spectrum antimicrobial treatment on the face and back of the panel that provides guaranteed resistance against the growth of mold/mildew, fungi, yeast, algae, and Gram-positive and Gram-negative odor/stain-causing bacteria.

**Grid Profile Options**

A DX®/DXL™	B DXW™	C CENTRICITEE™ DXT	D DX/DXL	E CENTRICITEE™ DXT	F FINELINE® DXF	G FINELINE® 1/8 DXFF

**Physical Data/ Footnotes**

**Product literature**  
 Data sheet: SC1836

**ASTM E1264 classification**  
 Type III, Form 2, Pattern CE

**ASTM E84 surface burning characteristics**  
 Class A  
 Flame spread: 25  
 Smoke developed: 50

**Weight**  
 .70-.79 lb./sq. ft.

**Thermal resistance**  
 R-1.4

**Maximum backloading**  
 See Warranty for details.

**Maintenance**  
 Can be cleaned easily with a soft brush or vacuum.

**Footnotes**

1. Applies when USG acoustical ceilings recycling program is utilized.
2. Dependent on location; see Sustainability selector.
3. LR values are shown as averages.
4. For details, see Sustainability selector.
5. Panel face and back surfaces treated with a patented, broad-spectrum antimicrobial standard formulation that inhibits and retards the growth of mold/mildew, fungi,

yeast, and odor/stain-causing Gram-positive and Gram-negative bacteria. For details, see *Ceiling Systems Warranties and Limitations (SC2102)* and *CLIMAPLUS Ceilings Certification of Performance (SC2451)*.