



DynaTred™ Roof Walkway DynaTred™ Plus Roof Walkway

Description

DynaTred and DynaTred Plus are preformed, skid-resistant boards consisting of modified asphalt, reinforcements and fillers with a ceramic granule surface on both sides. They are durable, resilient and maintenance free.


Use

DynaTred and DynaTred Plus can be installed over built-up and modified bitumen roofing systems to provide an integral, skid-resistant walkway for demanding service access needs.

Over smooth or mineral-surfaced roofs, or prior to graveling, install DynaTred and DynaTred Plus in either a full bed of hot asphalt or MBR® Utility Cement. If installed in hot asphalt, use the same asphalt recommended for use with the BUR or modified bitumen membrane. All four corners of each piece should be fully and firmly set prior to walking on the board.

Leave a minimum of 1" (2.54 cm) open space in all directions between walkway boards to provide for drainage of the roofing system.

DynaTred and DynaTred Plus are not recommended for use on slopes in excess of 2" per foot (167 mm/m).

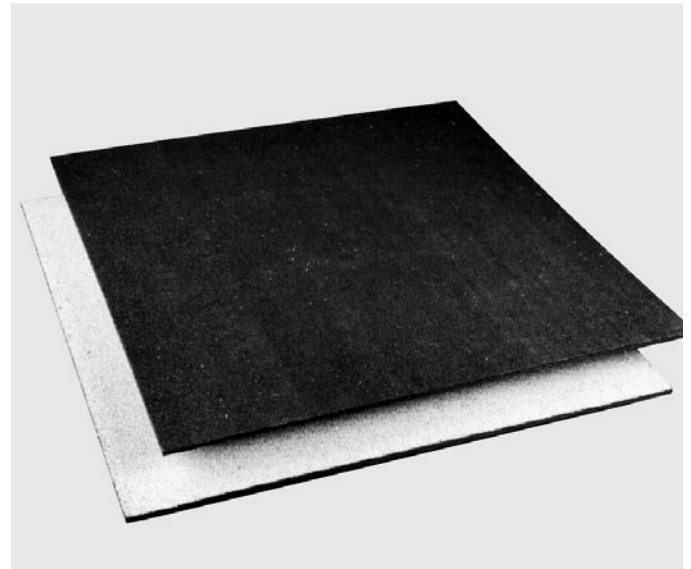

Advantages

- Long-lasting roof protection.
- Skid-resistant surface.
- Durable, resilient and maintenance free.
- Can be easily cut with a heavy-duty utility knife or circular saw with a carbide-tipped blade.

Typical Physical Properties

Thickness	
DynaTred.....	5/16" (7.94 mm)
DynaTred Plus.....	1/2" (1.27 cm)
Dimensions	
Width.....	32" (81.28 cm) ± 1/4" (6.35 mm)
Length.....	32" (81.28 cm) ± 1/4" (6.35 mm)
Color.....	Black/White or White/White
Water Absorption.....	<0.5%

Sizes

32" x 32" (81.28 cm x 81.28 cm)

Refer to the Material Safety Data Sheet and product label prior to using this product.