

HDPE To Steel / Stainless Steel Couplings



1. Standard Coupling  
to cut groove end steel:

2. Restricted use coupling  
to standard pipe:

3. Flexible Pipe Connectors  
4. Engineered Coupling:

Requires no restraint, no internal stiffeners  
flow contacts gasket (EPDM/Nitrile)  
external: enamel standard(galvanized & zinc electroplated optional)  
Above and below ground use  
requires pipe restraint, internal stiffeners for HDPE  
temperature range limited(35-80 degree fahrenheit)  
below ground use only  
external:steel and ductile parts standard(SS optional)  
flow contacts gasket Nitrile(Buna N) or SBR(Buna S) Standard  
for gravity and DWV applications  
designed per application


IPS

Pipe Size	Style			
	1	2	3	4
3/4"			X	
1"			X	
1.5"		X	X	
2"	X	X	X	
3"	X	X	X	
4"	X	X	X	
6"	X	X	X	
8"	X	X	X	
10"	X	X	X	
12"	X	X	X	
14"		X	X	X
16"		X	X	X
18"		X	X	X
20"		X	X	X
22"		X	X	X
24"		X	X	X
26"		X		X
28"		X		X
30"		X		X
32"		X		X
34"		X		X
36"		X		X

DIPS

Pipe Size	Style			
	1	2	3	4
4"		X	X	
6"		X	X	
8"		X	X	
10"		X	X	
12"		X	X	
14"			X	X
16"			X	X
18"			X	X
20"			X	X
24"			X	X
30"			X	X

\*\*Engineered Couplings Available larger than 36" if required.

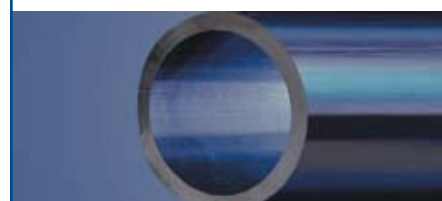

Mechanical Connectors

1-800-345-ISCO

www.isco-pipe.com