



The Intelix DVI-F balun allows a DVI (digital visual interface) signal to be transmitted via cost-effective twisted pair (Cat 5) cable. The Intelix DVI-F supports standard HDTV and VESA resolutions, as well as the DDWG standard for DVI compliant monitors. Typical applications include home theater systems, classroom and educational facilities, corporate and boardroom audio-visual systems, and digital signage.

Two individual runs of twisted pair cable—one run of shielded and one run of unshielded—are required when installing the DVI-F balun. The video signal should be transmitted on the shielded twisted pair. In environments susceptible to high electromagnetic interference, two shielded twisted pair cables should be used.


The Intelix DVI-F contains both a send and receive balun, mounting plates, an DVI cable, and two power supplies. In most applications, only one power supply is required; however, depending on the circuitry of the input/output devices, the second power supply may be necessary.

**Technical Specifications**

<b>Maximum Distance*</b>	150 feet	<b>Power</b>	External 5 VDC; powered on either end
<b>Video Amplifier Bandwidth</b>	1.65 Gbps	<b>Max Power Consumption</b>	15 watts max
<b>Single Link Range</b>	1080p/1920x1200	<b>Temperature</b>	Operating: 32 to 131 F (0 to 55 C) Storage: -4 to 185 F (-20 to 85 C) Humidity: up to 95%
<b>Vertical Frequency Range</b>	60 Hz	<b>Dimensions</b>	3.4" x 3.25" x 1.25" <i>(send and receive balun)</i>
<b>Input Video Signal</b>	1.2 volts p-p	<b>Shipping Weight</b>	3 lbs.
<b>Input DDC Signal</b>	5 volts p-p (TTL)	<b>Ordering Information</b>	<i>DVI-F</i> , includes both send and receive baluns, two power supplies, one 6' DVI cable, and mounting plates
<b>Connectors</b>	<i>Send balun:</i> One (1) DVI-I connector to two (2) shielded RJ45 connectors <i>Receive balun:</i> One (1) DVI-I connector to two (2) shielded RJ45 connectors <i>Note: the Intelix DVI-F only supports DVI-D signals</i>	<b>Warranty</b>	Two years
<b>Cabling</b>	Two structured cabling runs required: shielded Cat 5 recommended for the video signal, unshielded Cat 5 suitable for the DDC signal		

Note: The Intelix DVI-F conforms to DVI and HDCP specifications. Intelix does not guarantee operation with devices that do not conform to these specifications. The Intelix DVI-F passes HDCP signals and does not manipulate them in any way.

\*Distances and picture quality may be affected by cable grade, cable quality, source and destination equipment, RF and electrical interference, and cable patches. Intelix specifications are based on straight-through cabling with standard-grade Cat 5.

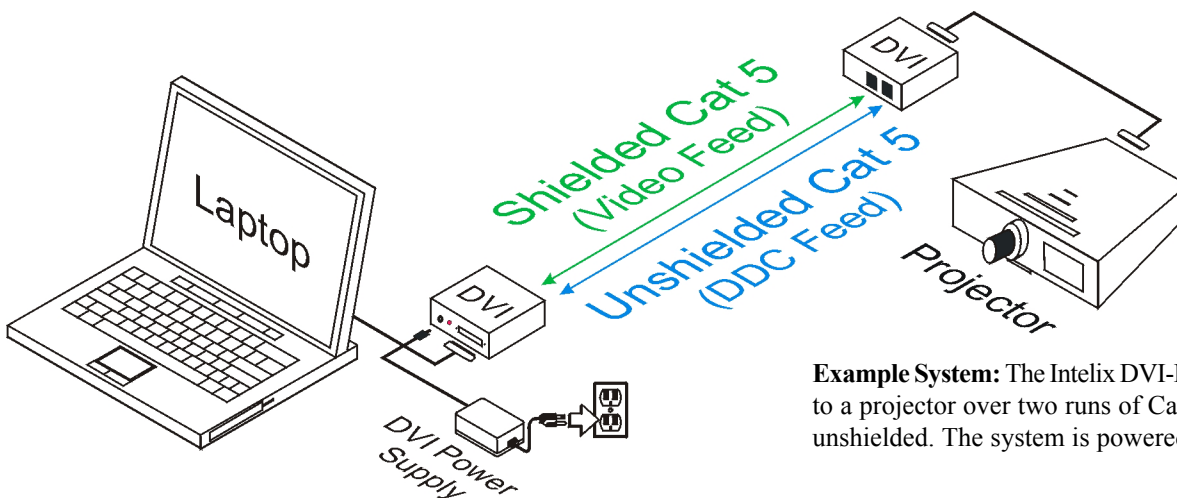

**Example System:** The Intelix DVI-F connects a remote laptop to a projector over two runs of Cat 5, one shielded and one unshielded. The system is powered at the send balun.