


# Communication & Control Cables

**WEST PENN WIRE**

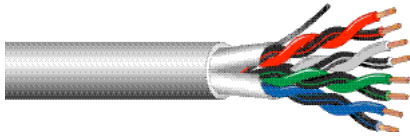

## Communication & Control Cable Multiple Pair 22 AWG / Overall Shielded featuring the PERFECT PAIR®

### Description:

- ASTM Bare Copper • PVC insulation • Overall shield 100% coverage of aluminum polyester foil with 24 AWG Strd. TC drain wire • Short overall twist construction • Overall PVC jacket

### Rating:

- NEC Type CMR
- (UL)-C(UL) Listed or c(ETL)us Listed
- Meets 300V requirements as specified in the NEC
- Flame Rating: UL1666

Standard spool size 1000ft.

### Applications:

#### Indoor for:

- Intercom Systems
- Security Systems
- Sound and Audio
- Background Music
- Power-limited Control Circuits

Catalog No.	No. of Pairs	Conductor Type & Nom. D.C.R	Insulation Type & Thickness	Shielding & % Coverage	Jacket Type & Thickness	Nom. O.D.	NEC Type	Nom. Capacitance	Jacket Color
			Inches	% Coverage	Inches	Inches			
3251	2	22 AWG Solid 17.5 Ω/Mft	PVC .010	Al. Foil 100%	PVC .015	.185	CMR	54 pf/ft* 97 pf/ft**	Gray
3252	3	22 AWG Solid 17.5 Ω/Mft	PVC .010	Al. Foil 100%	PVC .015	.197	CMR	54 pf/ft* 97 pf/ft**	Gray
3253	4	22 AWG Solid 17.5 Ω/Mft	PVC .010	Al. Foil 100%	PVC .015	.216	CMR	54 pf/ft* 97 pf/ft**	Gray

\* Capacitance between conductors.

\*\* Capacitance between one conductor and the other connected to the shield

### Special Notes:

- Select cables are available in our Easybox®
- Orange ripcord included on cables containing 3 or more pairs

Color Code- See pg. 19