



RHA, RHG

ROOF HATCH

Internet address: www.mifab.com

Toll Free: 1-800-465-2736

Canada Toll Free: 1-800-387-3880



SERIES RHA, RHG

ROOF HATCH

DESCRIPTION

The MIFAB® RHA and RHG roof hatches are designed to provide convenient, economical access to the roofs of buildings. Available in either white prime coated galvanized steel (RHG) or aluminum (RHA). All hatches are manufactured with weather resistant gasketing to ensure long life, low maintenance and ease of operation. MIFAB's roof hatches are designed for safety, durability and ease of operation. Roof hatches install easily over the roof opening and are secured from the base flange to the roof deck.

SPECIFICATIONS

Material RHG cover is 14 gage galvanized steel and 20 gage steel liner. RHA cover is .090" aluminum with a .050 aluminum liner. The inside of cover is gasketed with a neoprene weather seal to provide a flush, tight, fit. Covers are insulated with 1" (25) of fibreboard and are designed to support a snow load of 40 lbs. per square foot. The frame for the RHG Series is 14 gage galvanized and the frame for the RHA Series is .090" aluminum.

Curb Curbs are 12" (305) high with 4" (100) wide rounded corner flashing flange complete with 1" (25) fibreboard insulation.

Hinge Formed steel hinges with stainless steel pins.

Finish RHG Series is a primed white finish. RHA Series is aluminum mill finish.


Opening Device Hydraulic column operators allow cover to open and close easily. Cover is equipped with an automatic hold open arm with red vinyl grip release that keeps the cover in an open position when needed, and allows for easy control when lowering the latch cover.

Handle Self latching outside cadmium plated steel turn handle with inside lever handle allows cover to always latch securely.

Lock Locking hasps are located both inside and outside of the cover. All hardware is cadmium plated steel.

Optional Accessories

- Bolt-on style ladders
- Handrail extensions
- Ship's Ladder Configurations with side rails
- Pop up Safety Post

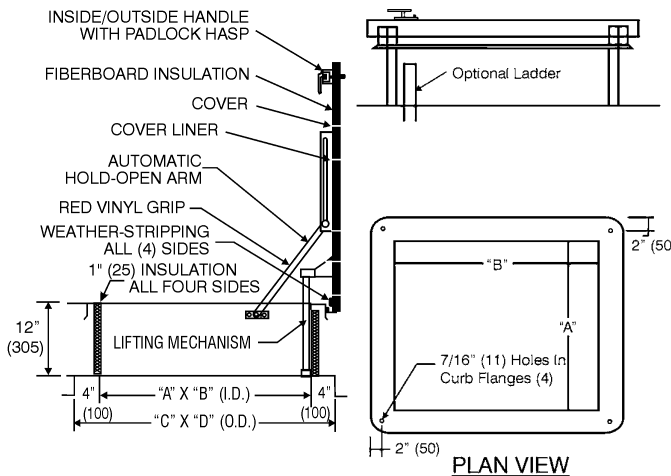

STANDARD SIZES (special sizes available upon request)

MODEL NUMBER		SIZE		FRAME INSIDE DIM. ("A" x "B")		FRAME OUTSIDE DIM. ("C" x "D")		ROOF OPENING		SHIPPING WEIGHT			
		Inches	mm	Inches	mm	Inches	mm	Inches	mm	RHA		RHG	
Aluminum	Galvanized									lbs.	kg.	lbs.	kg.
RHA2436	RHG2436	24 x 36	610 x 914	24 x 36	610 x 914	31 x 43	787 x 1092	24 x 36	610 x 914	70	31.8	135	61.3
RHA3036	RHG3036	30 x 36	762 x 914	30 x 36	762 x 914	37 x 43	940 x 1092	30 x 36	762 x 914	85	38.6	155	70.4
RHA3054	RHG3054	30 x 54	762 x 1371	30 x 54	762 x 1371	37 x 61	940 x 1549	30 x 54	762 x 1371	135	61.3	225	102.2
RHA3096	RHG3096	30 x 96	762 x 2438	30 x 96	762 x 2438	37 x 103	940 x 2616	30 x 96	762 x 2438	245	111.3	335	152.2
RHA3636	RHG3636	36 x 36	914 x 914	36 x 36	914 x 914	43 x 43	1092 x 1092	36 x 36	914 x 914	110	50.0	200	90.9
RHA4848	RHG4848	48 x 48	1219 x 1219	48 x 48	1219 x 1219	55 x 55	1397 x 1397	48 x 48	1219 x 1219	305	138.6	430	195.4

(Dimension) Denotes Millimetres

NOTE: The hinge is always furnished on the "A" or height (longer) dimension, unless otherwise specified.