


# Communication & Control Cables

## Communication & Control Cable 22 AWG Multiple Pair/ Overall Shielded featuring the PERFECT PAIR®

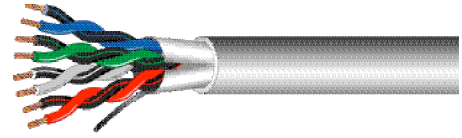

### Applications:

#### Indoor for:

- Intercom Systems
- Security Systems
- Sound and Audio
- Background Music
- Power-limited Control Circuits

### Description:

- ASTM Bare Copper • PVC insulation • Overall shield 100% coverage of aluminum polyester foil with 24 AWG Strd. TC drain wire • Short overall twist construction • Overall PVC jacket

### Rating:

- NEC Type CMR
- (UL)-C(UL) Listed or c(ETL)us Listed
- Meets 300V requirements as specified in the NEC
- Flame Rating: UL1666

Standard spool size 1000ft.

Catalog No.	No. of Pairs	Conductor Type & Nom. D.C.R	Insulation Type & Thickness Inches	Shielding & % Coverage	Jacket Type & Thickness Inches	Nom. O.D. Inches	NEC Type	Nom. Capacitance	Jacket Color
3651	2	22 AWG (7x30) 17 Ω/Mft	PVC .010	Al. Foil 100%	PVC .015	.201	CMR	55 pf/ft* 99 pf/ft**	Gray
3652	3	22 AWG (7x30) 17 Ω/Mft	PVC .010	Al. Foil 100%	PVC .015	.214	CMR	55 pf/ft* 99 pf/ft**	Gray
3653	4	22 AWG (7x30) 17 Ω/Mft	PVC .010	Al. Foil 100%	PVC .015	.244	CMR	55 pf/ft* 99 pf/ft**	Gray
3654	6	22 AWG (7x30) 17 Ω/Mft	PVC .010	Al. Foil 100%	PVC .015	.293	CMR	55 pf/ft* 99 pf/ft**	Gray
3655	9	22 AWG (7x30) 17 Ω/Mft	PVC .010	Al. Foil 100%	PVC .020	.343	CMR	55 pf/ft* 99 pf/ft**	Gray
3656	12	22 AWG (7x30) 17 Ω/Mft	PVC .010	Al. Foil 100%	PVC .020	.388	CMR	55 pf/ft* 99 pf/ft**	Gray

Color Code	
Colors	Colors
1. Black/Red-Red	8. Red/White-White
2. Black/White-White	9. Red/Green-Green
3. Black/Green-Green	10. Red/Blue-Blue
4. Black/Blue-Blue	11. Red/Yellow-Yellow
5. Black/Yellow-Yellow	12. Red/Brown-Brown
6. Black/Brown-Brown	
7. Black/Orange-Orange	
<b>JACKET:</b> Gray	

\* Capacitance between conductors.

\*\* Capacitance between one conductor and the other connected to the shield

### Special Notes:

- Select cables are available in our Easybox®
- Orange ripcord included on cables containing 3 or more pairs