



**MIFAB**<sup>TM</sup>  
MANUFACTURING INC.

## EXTERIOR ACCESS DOORS

### WID SERIES

7308 Aspen Lane North, Suite 115, Minneapolis, Mn. 55428 Tel: (763) 424-7888 Fax: (763) 424-5059 Toll Free: 1-800-387-3880

Internet address: [www.mifab.com](http://www.mifab.com)

E-mail address: [scottrmifab@earthlink.net](mailto:scottrmifab@earthlink.net)




## SERIES WID

### EXTERIOR ACCESS DOOR/WALK-IN DOOR

#### DESCRIPTION

The MIFAB® WID exterior access doors are designed to provide convenient access to any exterior application, or anywhere that requires protection against air leakage and/or water penetration. WID doors are also designed to serve the custom air handling equipment manufacturers, as well as mechanical contractors who field assemble built-up air handling systems. All WID doors are manufactured with extruded aluminum flanged frames and door panel frames. Door panels are satin coat steel with optional stainless steel and aluminum sheet inserts. Door panels are insulated and gasketed. WID doors can be manufactured in custom sizes from 12" x 12" to 96" x 96". Consult the factory for larger applications.

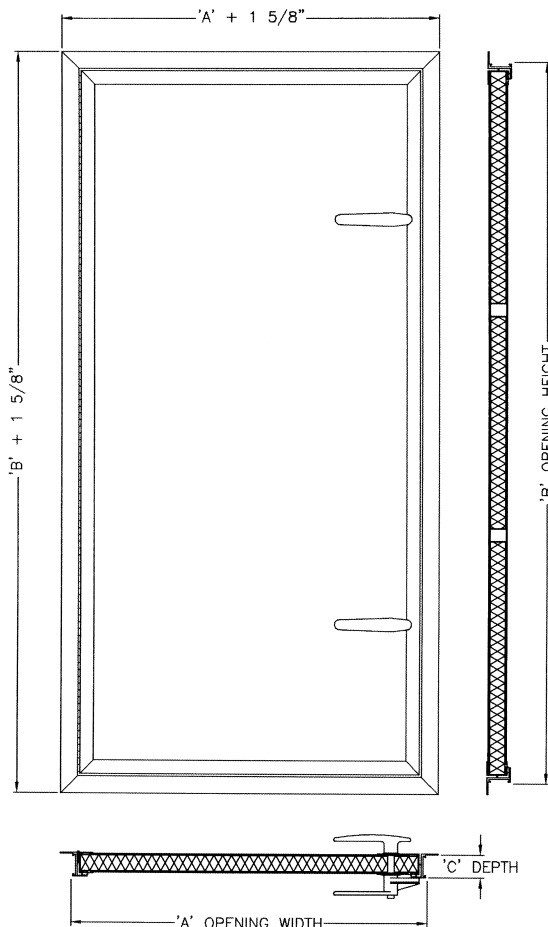

#### SPECIFICATIONS

<b>Flanged Frame</b>	.080" extruded aluminum
<b>Door Panel Frame</b>	.060" extruded aluminum
<b>Door Panels</b>	20 gauge satin coat steel, with optional stainless steel and aluminum sheet
<b>Insulation</b>	.75 PCF fiberglass
<b>Handles</b>	Dual Acting Handles for inside and out side operation
<b>Gasket</b>	Extruded EPDM draft seal gasket
<b>Hinge</b>	Zinc plated steel continuous type
<b>Optional Viewport</b>	9" x 9" or 12" x 12"
<b>Finish</b>	Mill
<b>Door Thickness</b>	1", 1-1/2", 2" and 4" deep
<b>Size Range</b>	12" x 12" thru 96" x 96"
<b>Swing</b>	Out-Swing (std) and In-Swing option
<b>Leakage Rated</b>	2.05 CFM, at a test pressure of 12.0 inches of water column. (WID 2.0)

#### Options & accessories

- Keyed Handles
- Thermal Break Frames
- In Swing Doors
- Double Doors
- Louvered Door Panels
- Pre-punched Mounting Holes