

Broadcast Coaxial Cables


WEST PENN WIRE

Broadcast Video Cable

RGB 25 & 26 Awg. Spiral Shielded Plenum Cables

Applications:

- Standard Definition Serial Digital Video
- Digital Audio(AES3id or SPDIF)
- High Resolution RGB Component Analog Video
- Studio Interconnect, Permanent Installation
- Ideal for Broadcast interconnection

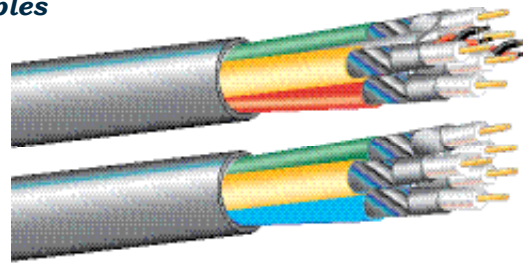

NEW Standard spool size 1000ft.

25 Awg. Plenum

Catalog No.	NEC Type	Conductor Type & Nom. D.C.R	Insulation Type & Thickness Inches	Shielding & % Coverage	Jacket Type Inches	Nom. O.D. Inches	Nom. Capacitance	Nom. VP	Nom. Imp. Ω	Overall Jacket Color
253CRGB 3 Coax RGB Plenum	CMP	3 Conductor 25 AWG (Solid) BC 32.5Ω/M'	Foam FEP .073	Bifoil* 100% + TC Spiral Shield 95%	Overall Copolymer	.260	16.2 pf/ft	82%	75Ω	Black
					Ind. Coax Flex Plenum .105					
					Connectors 75Ω 3 Pc. BNC - CN-BM74-19 75Ω Compression BNC - CN-FS1BNC					
255CRGB 5 Coax RGB Plenum	CMP	5 Conductor 25 AWG (Solid) BC 32.5Ω/M'	Foam FEP .073	Bifoil* 100% + TC Spiral Shield 95%	Overall Copolymer	.310	16.2 pf/ft	82%	75Ω	Black
					Ind. Coax Flex Plenum .105					
					Connectors 75Ω 3 Pc. BNC - CN-BM74-19 75Ω Compression BNC - CN-FS1BNC					
256CRGB2P 6 Coax RGB 2 Pair Audio Plenum	CMP	6 Cond. 25 AWG (Solid) BC 32.5Ω/M'	Foam FEP .073	Bifoil* 100% + TC Spiral Shield 95%	Overall Copolymer	.395	16.2 pf/ft	82%	75Ω	Black
					Ind. Coax Flex Plenum .105					
		Twisted Pair Construction 2 Pair 22 Awg. (7x30) Bare Copper, Shielded, Plenum PVC Jackets (Black, Red)			Connectors 75Ω 3 Pc. BNC - CN-BM74-19 75Ω Compression BNC - CN-FS1BNC					

26 Awg. Plenum

WP258263 3 Coax RGB Plenum	CMP	3 Conductor 26 AWG (7x34) TC 41Ω/M'	Foam FEP .073	Bifoil* 100% + TC Spiral Shield 95%	Overall Copolymer	.260	16.1 pf/ft	82%	75Ω	Black
					Ind. Coax Flex Plenum .108					
					Connectors 75Ω 3 Pc. BNC - CN-BM74-19 75Ω Compression BNC - CN-CSBNC-26					
WP258265 5 Coax RGB Plenum	CMP	5 Conductor 26 AWG (7x34) TC 41Ω/M'	Foam FEP .073	Bifoil* 100% + TC Spiral Shield 95%	Overall Copolymer	.310	16.1 pf/ft	82%	75Ω	Black
					Ind. Coax Flex Plenum .108					
					Connectors 75Ω 3 Pc. BNC - CN-BM74-19 75Ω Compression BNC - CN-CSBNC-26					

Electrical Specifications See page 82

Notes:

Standard Spool size 1000ft, spools are one piece, but lengths may vary +/- 10%
Bifoil is an aluminum polyester aluminum tape with 100% coverage
100% Sweep Tested