



Specifications: CM-EZ-II

Tile Bridge Included

System Type	8-inch coax, open-ceiling, sealed (20-watt transformer for 25/70.7/100-volt or voice-coil-direct)
Impedance (nominal) ¹	8 ohm
Sensitivity dB @ 2.83 V/1 m	87.5 dB
Sensitivity dB @ 1W/1m ²	87.5 dB
Frequency Response (-3 dB) ³	73 Hz - 19 kHz
Frequency Response (-10 dB) ³	54 Hz - 22 kHz
Max. Program Power ⁴	80 W
Max. Continuous Power RMS ⁵	40 W
Max. Power SPL @ 1 m ⁶	103.5 dB
Coverage Angle (-6 dB @ 2 kHz)	125°
Coverage Angle (-6 dB @ 10 kHz)	55°
Coverage Angle (averaged 2-10 kHz)	92°
Directivity Factor (Q)	5.1 (averaged 100 Hz - 10 kHz); 5.5 (2 kHz)
Directivity Index (DI) dB	5.9 dB (averaged 100 Hz - 10 kHz); 7.4 dB (2 kHz)
Tap Selector	Six-position rotary switch with voice coil direct
Transducer - Low-Frequency Driver	203 mm (8.00 in.) polypropylene cone, butyl rubber surround
Transducer - High-Frequency Driver	25 mm (1.00 in.) polypropylene dome tweeter
Low-Frequency Voice Coil	25.4 mm (1.00 in.)
Crossover Frequency	5.6 kHz
Network Type: Low-Pass	6 dB per octave, 1st order
Network Type: High-Pass	6 dB per octave, 1st order
Enclosure Material	Drawn steel backcan with ABS baffle
Grille	Steel with powder-coat finish
Inputs	18-gauge hard-wired leads
Colors	Black or white
Backcan Diameter	231.8 mm (9.13 in.)
Backcan Height	190.5 mm (7.50 in.)
Visible Diameter	273.1 mm (10.75 in.)
Visible Height	5.1 mm (0.20 in.)
Mounting Hole Diameter	247.7 mm (9.75 in.)
Min / Max Ceiling Thickness	12.7 mm (0.50 in.) / 19.1 mm (0.75 in.)
Weight	3.2 kg (7.0 lbs.)
Shipping Weight	3.6 kg (7.9 lbs.)
Packaging	One per box
Included Accessories	Tile bridge, UL-listed flex conduit clamp, paint shield
Optional Accessories	Pre-construction bracket (AC-CMEZ-PCB), junction box (AC-CMEZ-JBOX)
UL Approval	UL 1480- and 2043-approved
CE Approval	Approved

Key Features

- SnapCam™ four-point, spring-loaded mounting system for rapid installation.
- One 203 mm (8 in.) polypropylene cone with butyl rubber surround and one 25 mm (1 in.) polypropylene balanced dome tweeter with FerroFluid.™
- Integrated backcan with 25/70.7/100-volt and voice-coil-direct tap settings for ease of ordering, stocking and installation.
- Quick-release mechanism for easy servicing.
- UL 1480 and 2043 approved.
- Adaptable to ceiling thicknesses ranging from 12.70 mm (0.5 in.) to 19.05 mm (0.75 in.).
- Included accessories: tile bridge, UL-listed flex conduit clamp, paint shield.
- Optional accessories: pre-construction bracket, junction box.
- High-quality black or white paint finish. Custom colors optional.

Description

The CM-EZ-II is a two-way, blind-mount, in-ceiling speaker. The CM-EZ-II speaker design incorporates an 8-inch polypropylene driver with rubber surround and a 7.3 liter steel backcan for extended frequency response (54 Hz – 22 kHz, (-10 dB). SoundTube's integrated CM-EZ-II design includes unique and patented blind-mount SnapCam™ installation technology and a 21-gauge steel tile bridge ensuring rapid and secure installation in any drop-tile ceiling. For easy ordering, stocking and installation, the CM-EZ-II comes with a six-position tap switch for 25-, 70.7- and 100-volt modes with voice-coil-direct position.

Applications

Engineered for general background to foreground music and paging applications, the CM-EZ-II is ideal for medical facilities, retail stores, restaurants, airports, churches, conference centers and boardrooms.

Transformer Taps

¹ Impedance listed per IEC 60268-5 with a minimum less than 80% the nominal impedance

² 1 W 1 m sensitivity determined using nominal impedance

³ Frequency response measured in half or full space as dictated by speaker mounting configuration

⁴ Max program power is 3 dB above max continuous power

⁵ Continuous power rating, EIA-426-B test

⁶ Max output based on max continuous power

70.7 V	Output	100 V	Output	25 V	Output
20 W	100.5 dB	20 W	100.5 dB	2.5 W	91.5 dB
10 W	97.5 dB	10 W	97.5 dB	1.3 W	88.5 dB
5 W	94.5 dB	5 W	94.5 dB	0.63 W	85.5 dB
2.5 W	91.5 dB	2.5 W	91.5 dB		
1.25 W	88.5 dB				

Patented SoundTube Technologies

SoundTube Entertainment and the MSE Audio Group constantly develop new technologies which enhance audio product performance. SoundTube Entertainment innovations are protected by multiple U.S. and international patents, which explicitly cover SoundTube dome, enclosure and dispersion technologies. The MSE Audio Group actively defends its patents in order to protect SoundTube resellers and end-users.

Technical Data and Specification Tools

Technical Data

SoundTube Entertainment strives to provide complete and effective technical information and data to dealers, engineers and designers. All data are available from SoundTube Entertainment or at www.soundtube.com.

Technical data and downloads include:

EASE™ data – 3-D polar plots.

EASE™ Address – 2-D modeling for distributed systems

Autodesk® Revit® software

Tech Sheets – Technical information and architectural specs for system engineers

SoundTubeSPEC™ – Proprietary speaker placement software

Acquisition and Verification

All data for SoundTube speakers are independently collected from and verified by NWAALabs (www.nwaalabs.com) using their proprietary MACH testing system. All data are collected and analyzed according to ASTM, ISO and AES standards using EASERA, TEF and MLSSA. Full balloon data including both phase and magnitude is compiled into a variety of formats including EASE 4.x, GLL and CLF.

Architectural Specifications

The loudspeaker shall consist of a 203 mm (8.0 in.) low-frequency transducer and one 25 mm (1.0 in.) high-frequency transducer with a frequency dividing network installed in a sealed enclosure. The low-frequency voice coil diameter shall be 25 mm (1.0 in.).

Performance specifications of a typical production unit shall be as follows: Usable frequency range shall extend from 54 Hz - 22 kHz (-10 dB). The speaker shall have a nominal impedance of 8 ohms. The loudspeaker shall be available with selectable 25/70.7/100-volt and voice-coil-direct tap switch. The frequency-dividing network shall have a crossover frequency of 5.6 kHz. Rated power capacity of the components and network shall be at least 40 watts continuous (RMS).

The backcan dimensions shall be no more than 7.50 in. (190.5 mm) in height by 9.13 in. (231.8mm) in diameter. Visible dimensions shall be no more than .20 in. (5.1 mm) in height by 10.75 in. (273.1 mm) in diameter.

The backcan shall be constructed of plated steel with an ABS plastic bezel. The grille shall be constructed of powder-coated steel. The low-frequency transducer shall have a polypropylene cone material with butyl rubber surround. The high-frequency transducer shall be constructed of polypropylene material using a balanced-dome configuration.

Shipped complete with UL-listed flex conduit clamp, tile bridge, grille, cut-out template and paint shield, the integrated CM-EZ-II open-ceiling speaker is engineered for high performance and rapid installation in plenum spaces. The CM-EZ-II incorporates a secondary attachment bolt for added security and code satisfaction where required.

The CM-EZ-II installation shall be by four-point blind-mount system using

spring-loaded cams and a tile bridge. The CM-EZ-II's spring-loaded cams are adaptable to stable surfaces including drop tile and sheetrock and can accommodate material thicknesses ranging from 12.70 mm (0.50 in.) to 19.05 mm (0.75 in.). For surfaces thicker than 15.87 mm (0.625 in.), proper installation requires removing the rubber feet on the cam mechanisms. Refer to the CM-EZ-II installation instructions at www.soundtube.com.

Designed for both 25/70.7/100-volt and voice-coil-direct applications, the CM-EZ-II is factory preset to the 70.7 at 20 watts operating mode with a tap switch located on the backcan. The system shall be the SoundTube CM-EZ-II for both low- and high-impedance applications.


SoundTube Entertainment

6430 Business Park Loop Road
Park City, Utah 84098
Phone 435.647.9555
Fax 435.647.9666
Toll Free 800.647.TUBE
www.soundtube.com


All SoundTube products come with a 5-year limited warranty.

Graphs and Plots


Frequency Response

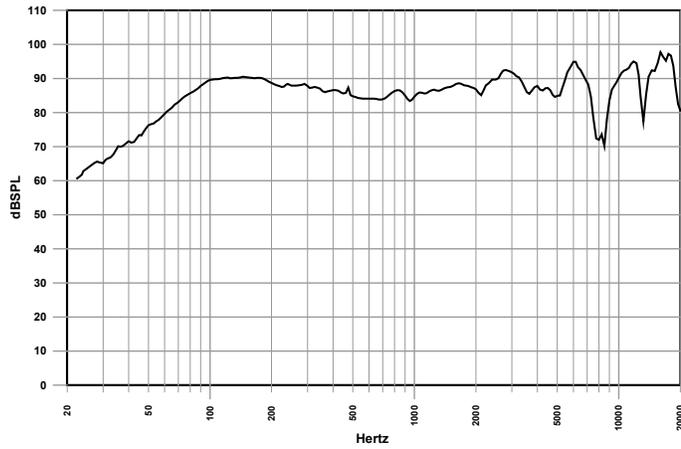


Phase/Impedance Response

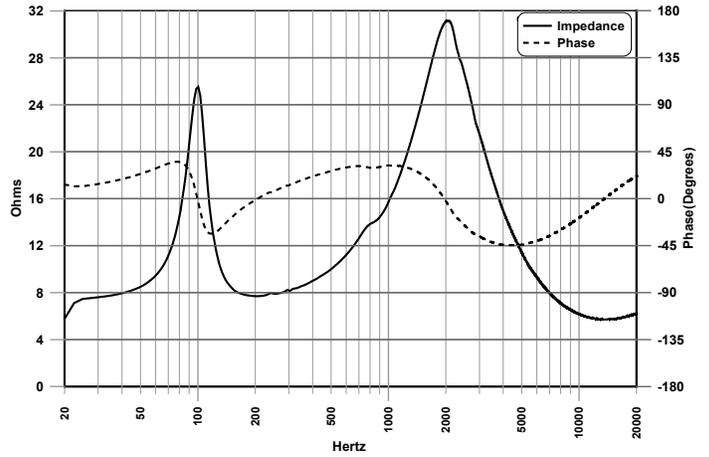

Vertical Beamwidth (-6 dB)

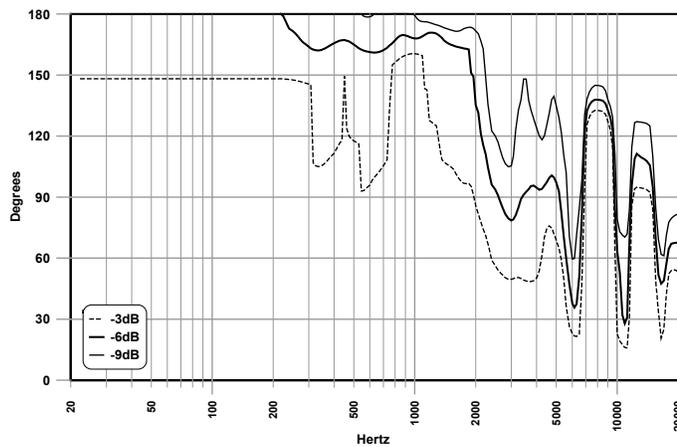


Directivity Index (DI)

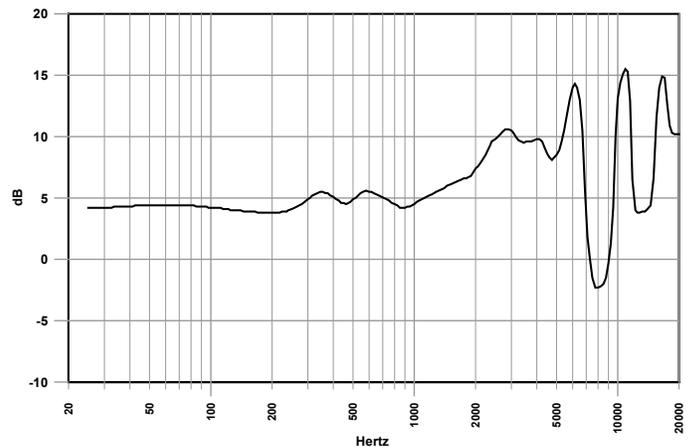




Polar Plots

— Horizontal
- - - Vertical

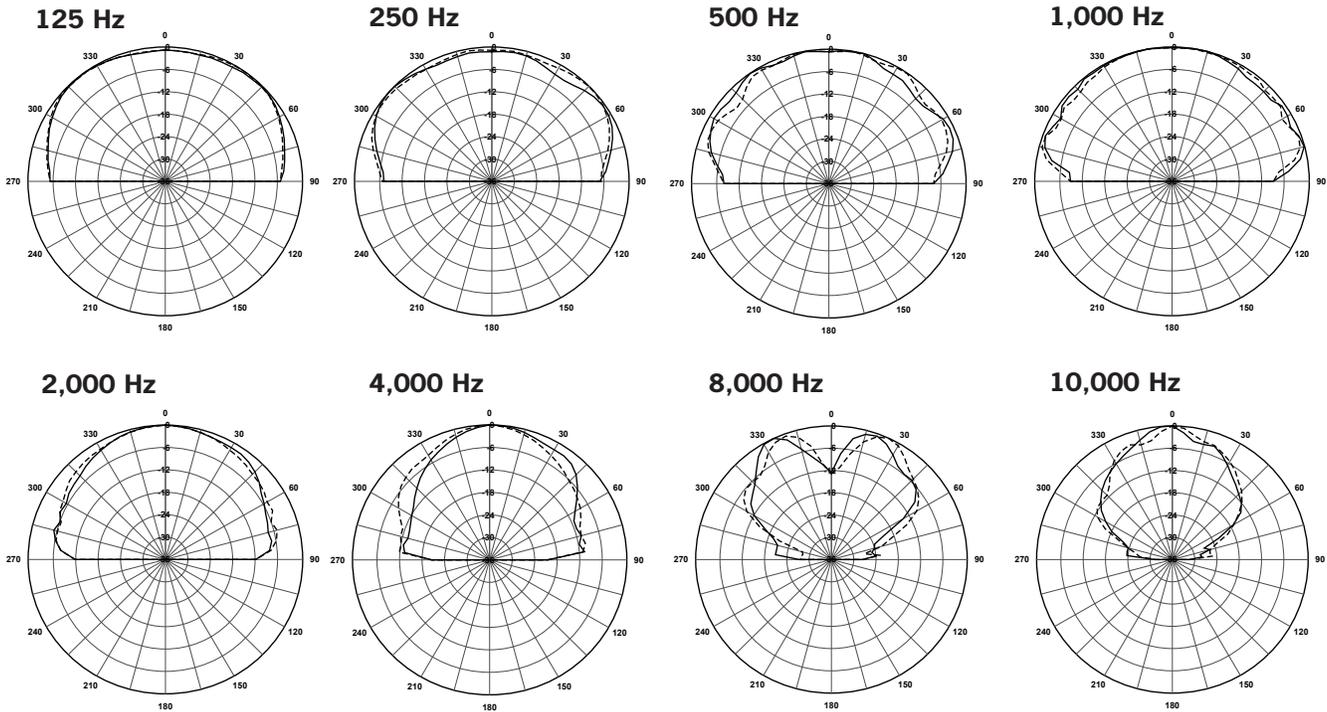


Technical data, EASE™ plots, SoundTubeSPEC™ software and product downloads available at www.soundtube.com


Mechanical Drawings

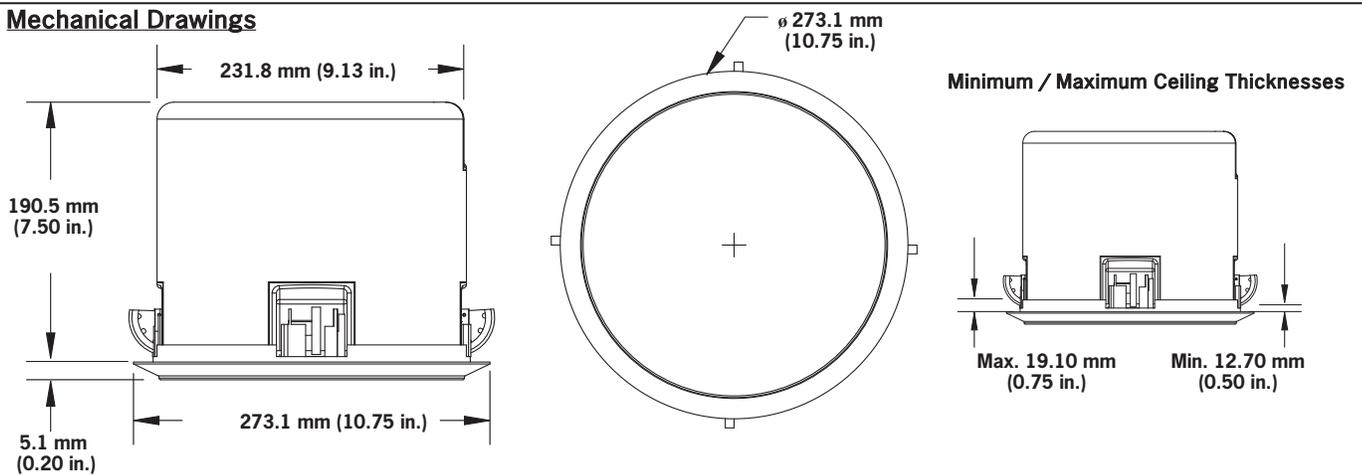

Optional Accessories

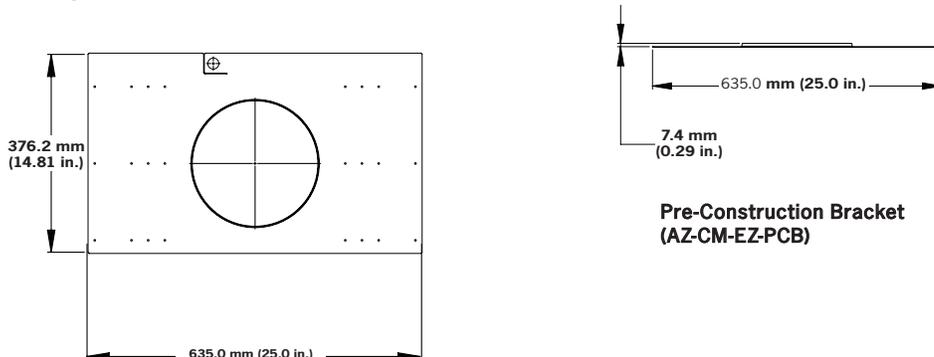

Included Accessories

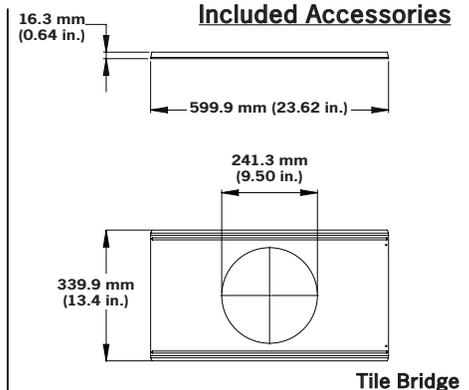

SoundTube Entertainment manufactures a complete line of speakers for:
Open-Ceiling • In-Ceiling • Surface-Mount • Outdoor • Sound-Focusing

All SoundTube products are designed and engineered in the USA.