




HexBlok Products

10MM Globe or Rising Stem Plug Style
Single Block, Block and Bleed, and Double Block and Bleed
Flanged Instrument Isolation Valves

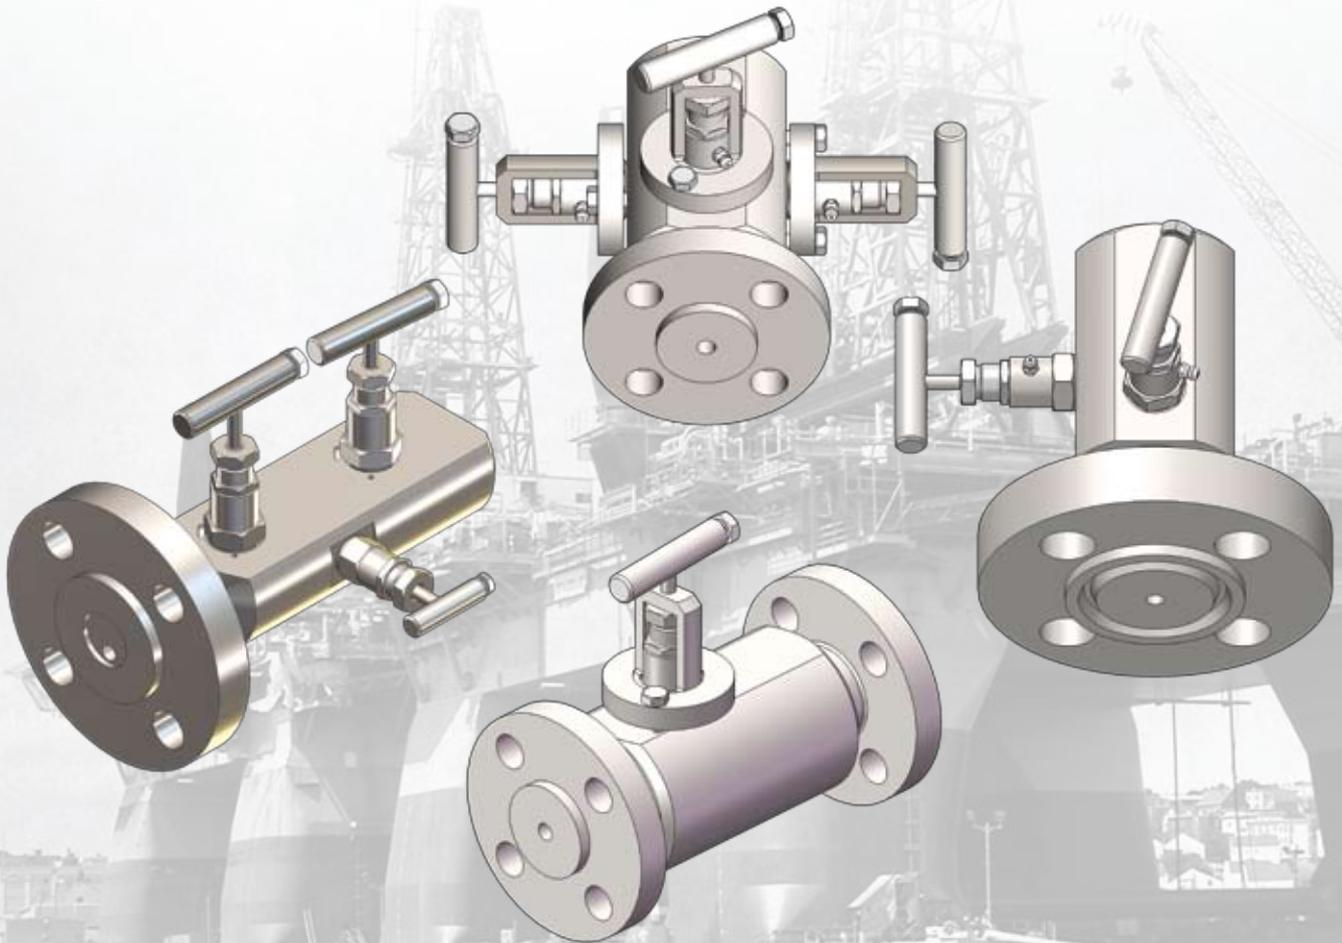

HexBlock. . .


Built Hex tough for a lifetime of use. See how inside . . .

HEXVALVE

A Division of
Richards Industries
3170 Wasson Road
Cincinnati, OH 45209

toll free. 800.543.7311
local. 513.533.5600
fax. 513.871.0105

www.hexvalve.com

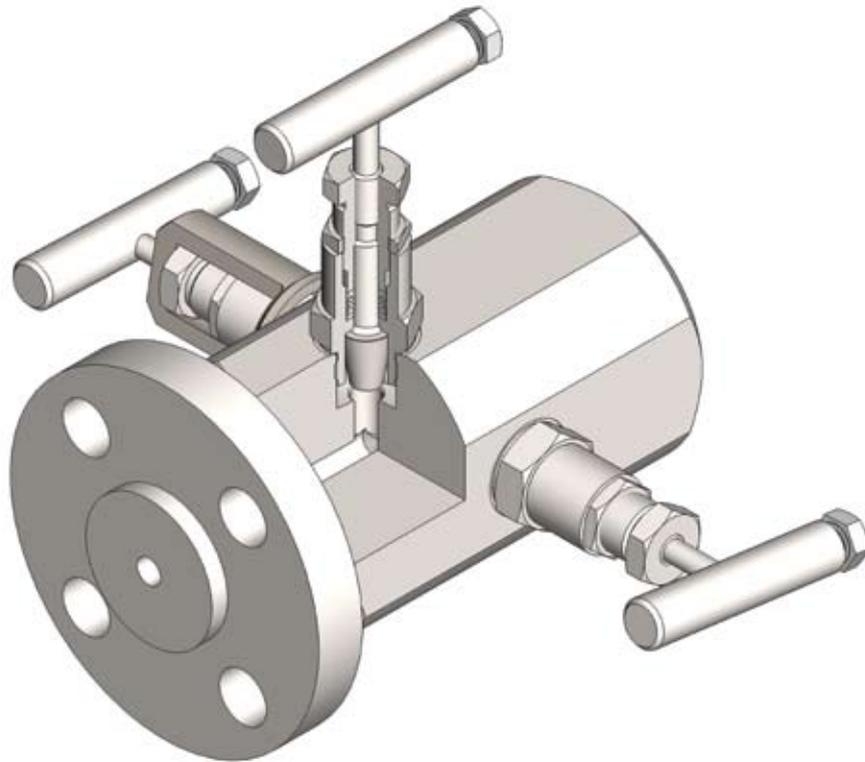HEXBLOK VALVES**HEXBLOK**

HEXBLOK: Designed and manufactured by the company that produced the Oil and Gas industries first primary gauge and orifice valves. Hex is proud to manufacture the most rugged and dependable Double Block and Bleed design used today. See for yourself, Hex builds tough valves.

APPLICATIONS

HEXBLOKS are used primarily on Upstream Offshore/Onshore Oil production and initial processing installations. Typically used on liquid hydrocarbon applications to minimize the size and weight of the pipe-valve assemblies associated with gauge pressure or analytical instrumentation. Used specifically for primary and/or secondary isolation, vent and calibration access.

The new standard 3/8" (10mm) porting along with a variety of standard features and options, porting makes the Hexblok stand out among competitive valves.

Also used in downstream Oil Refining and Petrochemical production on flanged process piping.

SPECIFICATIONS: GLOBE STYLE VALVES

WORKING PRESSURE

In accordance to ASME B16.5 for class 150 to 2500

WORKING TEMPERATURES

450°F (232°C) for Teflon packing

1000°F (528°C) for Graphite packing

CERTIFICATIONS


API 607 5th Edition (Fire Test)

ASME VIII (pressure boundaries)

PED

ANSI B16.5 (flange dimensions)

EN 10204.3.1 (material traceability)

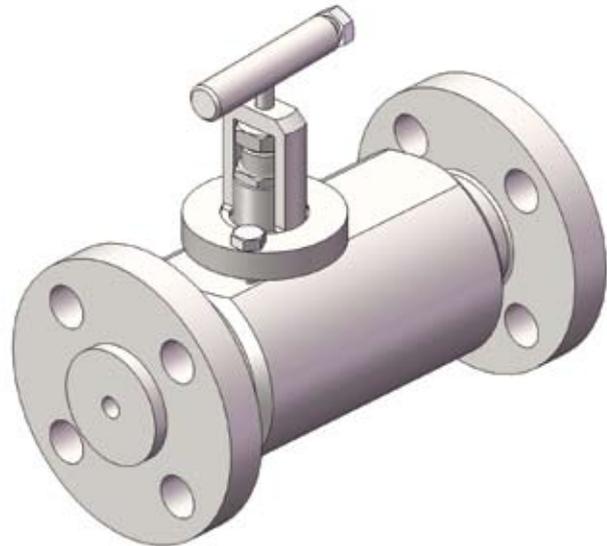


HEXBLOK ADVANTAGES & CUSTOMER BENEFITS

- Large, 3/8" (10mm) standard orifice and porting, resulting in a lower probability of plugging.
- OBS (Outer Bonnet Support) design provides the security of OS&Y bonnets with the packing maintenance ease of a screwed bonnet.
- Optional "Zerk" style high pressure grease fitting option ensures long term stem/valve life, and easier stem operation. Internal porting deploys grease where it is needed most: above the packing and into the stem threads, for lubrication and environmental protection.
- Large, robust bonnet and NRT stem design means higher probability of long life, and less break risk than competitive designs
- Hex was the first in the industry to utilize Non-Rotating Stem Tip (NRT) technology. When the stem tip contacts the seat, it stops rotating, preventing the cross scoring and eventual leaks that can occur with ball type stems
- 4 rings Teflon Chevron style packing, or multi-ring set of grafoil surrounded by braided graphite standard.
- API 607 5th Edition (fire test) Standard (Graphite-packed and hard seat models only)
- Large variety of standard and optional forged or bar materials and outlet options, means you can select the style and material you need immediately from catalog, instead of having to contact the factory
- Special built-to-order design inquiries welcome

HEXBLOK VALVES: GLOBE STYLE VALVES

"Zerk" style grease fitting option ensures long term life, and ease of operation of your HexBlok assets. Internal porting deploys grease where it is needed: above the packing and into the stem threads

Outer Bonnet Support (OBS) provides the security of OS&Y bonnets with the packing maintenance ease of a screwed bonnet

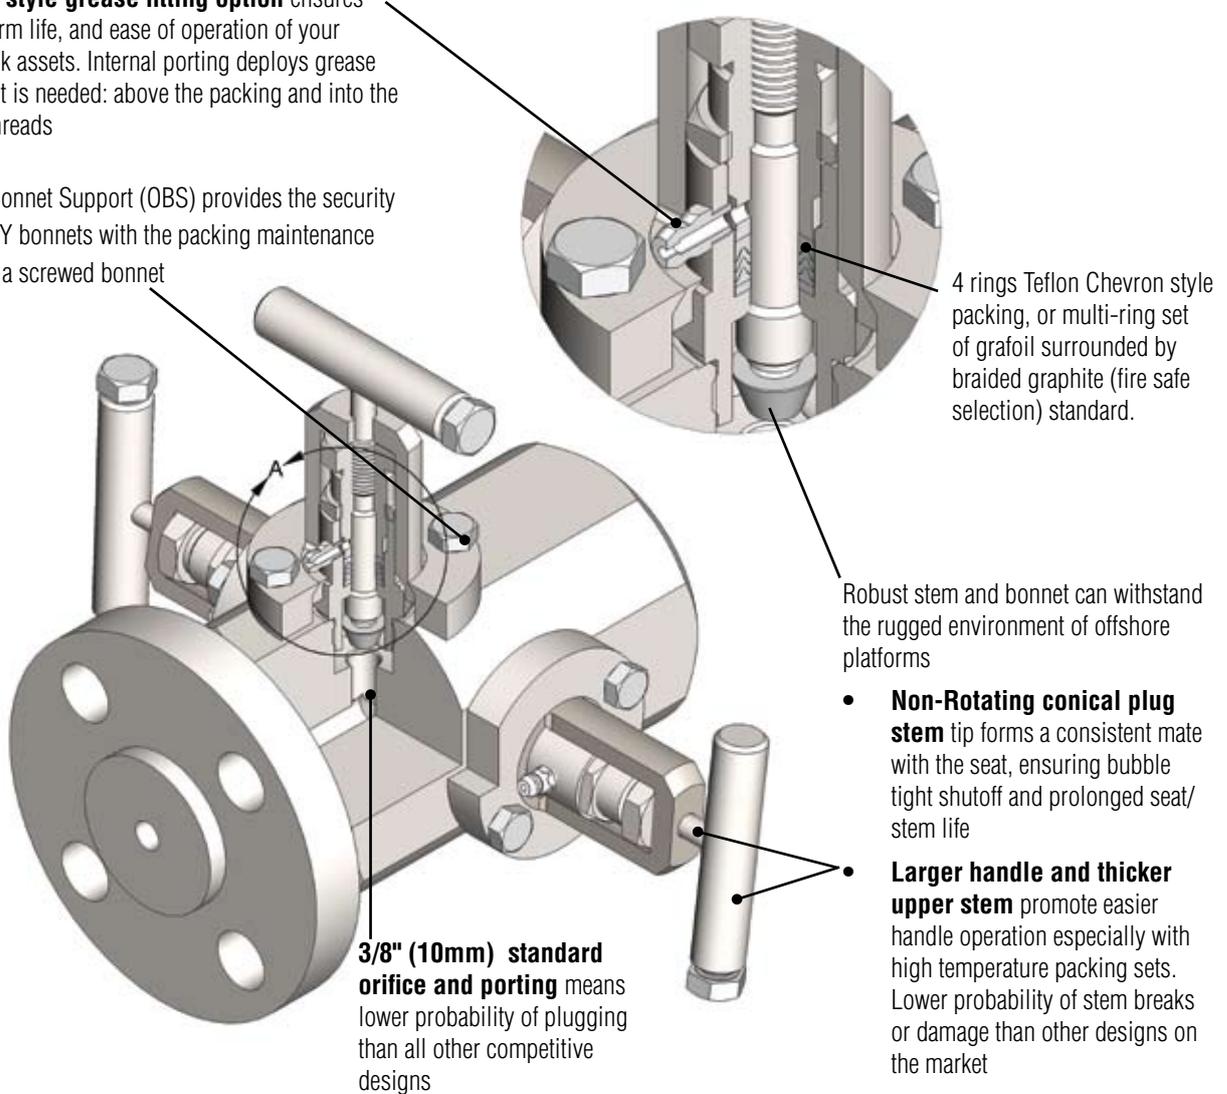

Note: Bonnet stop pin standard on screwed bonnets. Competitor's hollow spring steel pins can corrode and crack in salt water or corrosive ambient environments.

- 1/2" - 14 NPT, FSW, Tube Socket, and Multiport Gauge Outlet options are standard selections (note: vent is 1/2" FNPT)
- Standard materials of construction: A182F 316L (forged), Hastelloy C, Incoloy 800, Inconel 600, Low Temp CS A350 LF2 (forged), Monel 400 (forged), Carbon Steel, A105 NACE, Carbon Steel A105, A182F 316L NACE (forged), Duplex A182 F51 (forged), Inconel (625), Super Duplex A182FS3 (forged)
- Screwed bonnet and OBS bonnets available
- Raised face (RF) and Ring Type Joint (RTJ) flange styles standard

HEXBLOK VALVES: GLOBE STYLE AND RISING STEM PLUG VALVE STYLE

Non-Rotating Tip (NRT) conical plug stem forms consistent mate with the seat ensuring bubble tight shutoff and prolonged stem and seat life

Robust stem and bonnet construction. Can withstand the rugged environment of offshore platforms better than any other design on the market


Combination anti-tamper with lock-out bonnet option

Rising stem plug style valve permits straight through porting (for rodout) with a traditional bonnet design (body configuration # 2)

3/8" (10mm) standard orifice and porting means lower probability of plugging than all other competitive designs

Solid bonnet stop pin standard. Hollow spring steel pins can corrode and crack in salt water, or corrosive ambient environments


One piece close fit forging, or barstock construction

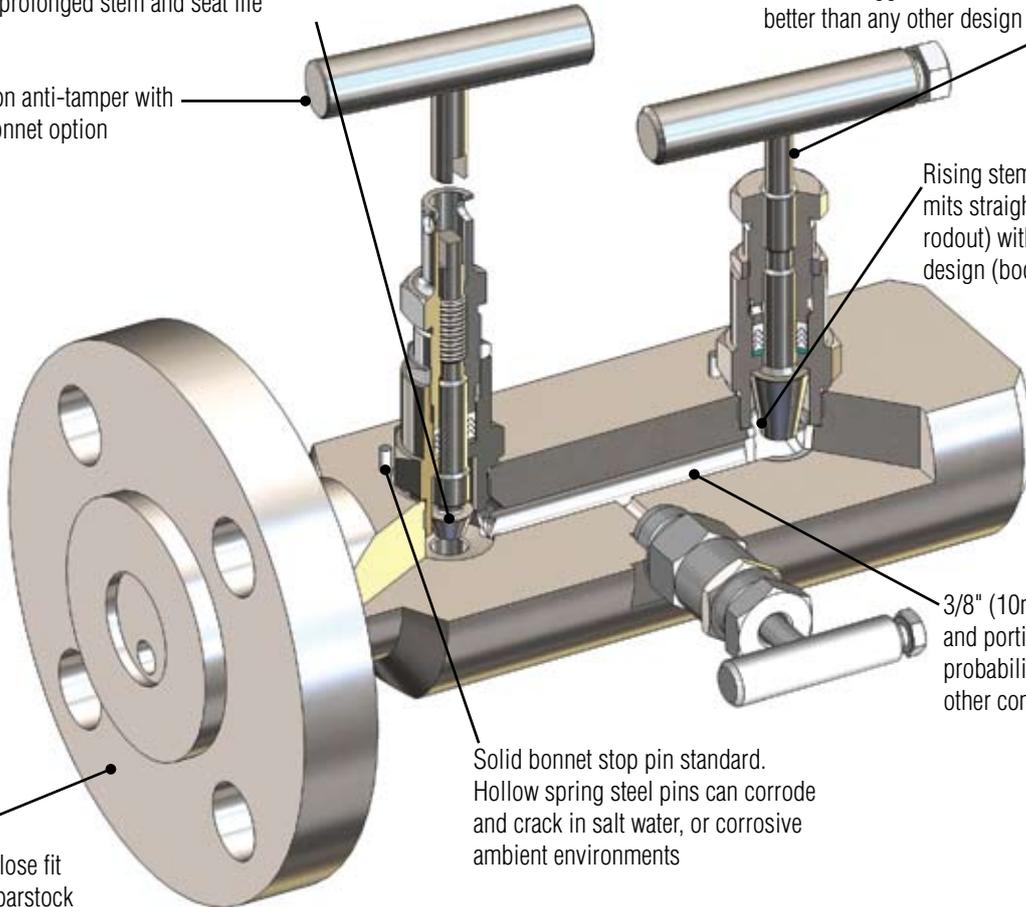


FLOW SCHEMATIC




For Models: **HK10, HK11**

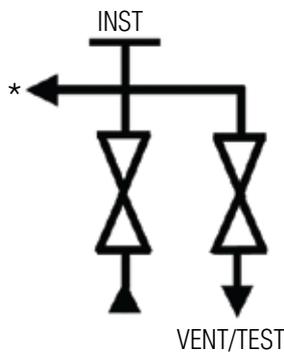

HK20, HK21

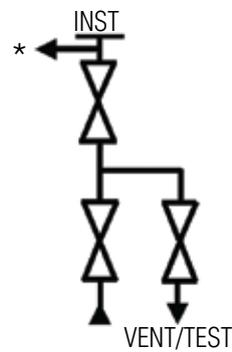

HK30, HK31



HK40, HK41

* Side instrument outlet available as option



PRODUCT DESIGNATOR - HEXBLOK

MODEL	BODY CONFIG.	BODY MAT'L	INLET SIZE	INLET TYPE	OUTLET SIZE	OUTLET TYPE	STEM/TIP	SEAT MAT'L	PACKING	OPTION	OPTION
HK10	2	2	3	C	3	1	4	1	3	A	8

MODEL	TYPE
HK10	Single Block Screwed Bonnet
HK11	Single Block 'OBS' Bonnet
HK20	Single Block & Bleed Screwed Bonnet
HK21	Single Block & Bleed 'OBS' Bonnet
HK30	* Double Block & Bleed Screwed Bonnet
HK31	* Double Block & Bleed 'OBS' Bonnet
HK40	** Double Block & Bleed Screwed Bonnet
HK41	** Double Block & Bleed 'OBS' Bonnet

* Block > Bleed > Block
 ** Block > Block > Bleed

BODY CONFIGURATION	
1	Hard Seat Primary and Secondary Block valve and Vent valve
2	Soft Seat Primary & Secondary Block Valves, with Hard Seat Vent Valve
3	Hard Seat Primary and Vent Valve and Soft Seat Secondary Block Valve (HK30 and HK31 only)

2 & 3 - soft seat is limited to 200°F and 1500 psi (103°C and 93 bar)

MATERIAL	
2	A182F 316L (forged)
H	Hastelloy C
I	Incoloy 800
J	Inconel 600
K	Low Temp CS A350 LF2 (forged)
M	Monel 400 (forged)
N	Carbon Steel, A105 NACE
P	Carbon Steel A105
3	A182F 316L NACE (forged)
6	Duplex A182 F51 (forged)
7	Inconel 625 (forged)
4	Super Duplex A182FS3 (forged)

INLET SIZE	
3	1/2" (DN15)
4	3/4" (DN20)
5	1" (DN25)
6	1-1/2" (DN40)
7	2" (DN50)

INLET TYPE	
C	150# RF
D	300# RF
G	600# RF
H	900/1500# RF
K	2500# RF

OUTLET SIZE	
3	1/2" (DN15)

OUTLET TYPE	
1	FNPT Outlet*
2	FSW Connection
W	Tube Socket Connection
N	HB521 with two plug**
9	Flanged (same as inlet)

* 2 outlets standard for vertical or horizontal instrument mount

** Three outlet "T" adaptor to allow for alternate upright gauge mount on horizontal pipe, or multiple instrument take-offs.

STEM / TIP	
3	316/316 NACE NRT Stem
4	316/316 NRT Stem
5	316/Stellite NRT Stem
B	Monel/Monel NRT Stem
D	Hast C/Hast C NRT Stem
K	316/Monel NRT Stem
9	Flanged (same as inlet)

SEAT MATERIAL	
1	Integral Seat
2	* Teflon (Body configuration "2" and "3" only)

* Contact factory for other seat materials

PACKING	
2	Teflon Packing
3	Graphite Packing (fire safe selection)

OPTION	
A	RTJ Ring Joint
B	Bonnet Grease Fittings
C	1/2" - 14 NPT plugged vent option

OPTION	
9	Tamper proof/lockout handle - vent valve
8	Tamper proof/lockout handle - block valve



A Division of Richards Industries
 3170 Wasson Road
 Cincinnati, OH 45209
 toll free. 800.543.7311
 local. 513.533.5600
 fax. 513.871.0105
 www.hexvalve.com