




Protection plus advanced performance

when handling volatile fuels, chemicals, and solvents.

Type II **AccuFlow™**

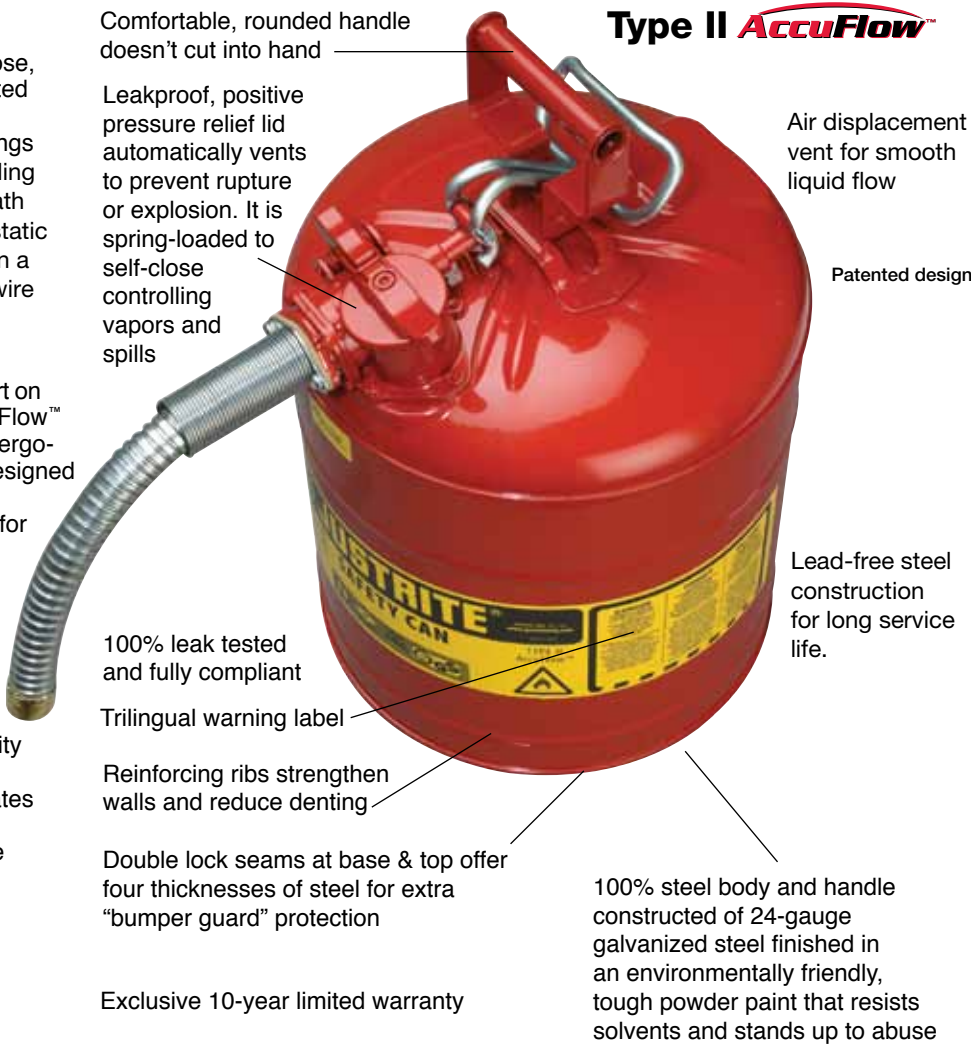

Exclusive, vented Type II AccuFlow™ manifold with Safe-Squeeze® trigger handle provides the fastest, smoothest, most controlled pouring of any Type II safety can

NEW



Flexible 9" (229mm) hose, offers targeted pouring into small openings while providing a ground path to prevent static sparks when a grounding wire is used



Quick-fill port on Type II AccuFlow™ features an ergonomically designed lift lever that opens wide for easy filling

NEW



Extra capacity in all cans accommodates oil additives for two cycle engines



Comfortable, rounded handle doesn't cut into hand

Leakproof, positive pressure relief lid automatically vents to prevent rupture or explosion. It is spring-loaded to self-close controlling vapors and spills

Air displacement vent for smooth liquid flow

Patented design

Lead-free steel construction for long service life.

100% leak tested and fully compliant

Trilingual warning label

Reinforcing ribs strengthen walls and reduce denting

Double lock seams at base & top offer four thicknesses of steel for extra "bumper guard" protection

100% steel body and handle constructed of 24-gauge galvanized steel finished in an environmentally friendly, tough powder paint that resists solvents and stands up to abuse

Exclusive 10-year limited warranty

Stainless Steel flame arrester stops flashback ignition, provides faster liquid flow, and offers superior chemical and corrosion resistance. Long 3-1/2" (88mm) length for safe, secure insertion of gas nozzle

Complies with OSHA & NFPA requirements. Accepted container under CARB. FM approved; UL & ULC listed, and TÜV certified.



Half-inch (13mm) grip lip along bottom supports pouring and resists accidental punctures when placed on uneven surfaces



Large ID zone permits user labeling to avoid misuse, mishaps with incompatible mixtures, or to identify owner or department

NEW



NEW