

SOLUTIONS™


- **Sales Tip:** Select from a series of standard compounds, or mix and match as needed for very specific application requirements.
 - **Where to Specify:** Selected compounds should correspond to the requirements of the application. Where wet or dry anti-fatigue matting is needed for very specific applications in harsh environments.
- Available in the following standard compounds: Fire Retardant, Anti-Bacterial, Industrial Chemical/Oil/Grease Resistant (GSII), ESD Conductive, ESD Dissipative, Brake Fluid Resistant
 - Base rubber compound is 100% Nitrile (except for Brake Fluid Resistant – EPDM) offering the highest resistance to industrial chemicals, oils, and greases
 - Fire retardant matting passes the federal flammability standard DOC FF 1-70/Meets or exceeds class 1 rating as specified in NFPA Life Safety Code 101 (ASTM E648-03/NFPA 253)
 - Anti-Bacterial compound meets or exceeds the following test standards: AATCC 147, ASTM G21, ASTM G22
 - (ESD) Dissipative meets IEC61340-4-1, measured resistance Rg $10^6 - 10^9 \Omega$, Rp $10^6 - 10^9 \Omega$
 - (ESD) Conductive meets IEC61340-4-1, measured resistance Rg $10^4 - 10^6 \Omega$, Rp $10^4 - 10^6 \Omega$
 - Available in solid or perforated versions for drainage
 - Compatible with patented #551 M.D. Ramp System® (100% Nitrile or EPDM) (Available in Black or Yellow – Dissipative/Conductive ramps in Black only)
 - Available with aggressive Silicon Carbide grit coating for long-lasting traction (GSII)
 - Easy to snap together mats on-site for custom configurations.
 - Overall thickness: 3/4 inch



SOLUTIONS™ STANDARD COMPOUNDS

Product	Top Surface	Stock Size	Weight (lbs.)
#650SFR - Fire Retardant	Perforated	3' x 3'	24
#656SFR - Fire Retardant	Solid	3' x 3'	29
#850SFR - Fire Retardant/GSII	Perforated	3' x 3'	24
#856SFR - Fire Retardant/GSII	Solid	3' x 3'	29
#660 - (ESD) Dissipative	Perforated	3' x 3'	24
#661 - (ESD) Dissipative	Solid	3' x 3'	29
#662 - Anti-Bacterial	Perforated	3' x 3'	24
#664 - Conductive	Perforated	3' x 3'	24
#665 - Conductive	Solid	3' x 3'	29
#663 - Brake Fluid Resistant	Perforated	3' x 3'	24
#863 - Brake Fluid Resistant/GSII	Solid	3' x 3'	29

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638

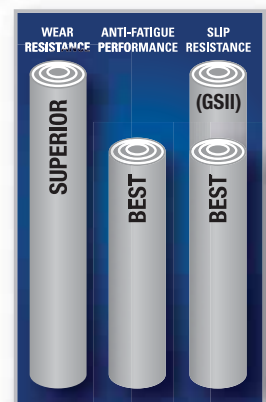

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS