

Cast Iron Threaded Fittings

Class 125 (Standard)

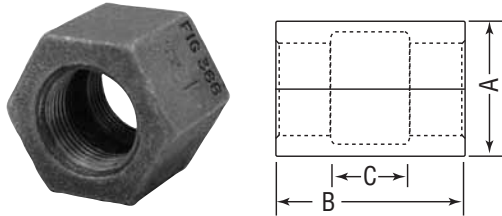

FIGURE 366 Screwed Hex Coupling	Size		Across Flats A		B		C		Unit Weight Black		
	NPS	DN	in	mm	in	mm	in	mm	lbs	kg	
			1	25	1 ¹⁵ / ₁₆	49	1 ¹¹ / ₁₆	43	9/ ₁₆	14	0.82

FIGURE 487 Flanged Union Gasket Type Assembled with gaskets	Size		Diam. of Flanges		No. of Bolts	Unit Weight			
	NPS	DN	in	mm		Black		Galv.	
						lbs	kg	lbs	kg
	1/2	15	2 ¹⁵ / ₁₆	75	3	1.75	0.79	1.75	0.79
	3/4	20	3	76	3	2.00	0.91	2.00	0.91
	1	25	3 ¹ / ₄	83	3	2.25	1.02	2.25	1.02
	1 ¹ / ₄	32	4 ³ / ₁₆	106	4	4.75	2.15	4.75	2.15
	1 ¹ / ₂	40	4 ³ / ₈	111	4	5.00	2.27	5.00	2.27
	2	50	5	127	4	6.50	2.95	6.50	2.95
	2 ¹ / ₂	65	5 ⁵ / ₈	143	4	8.50	3.85	8.50	3.85
	3	80	6 ³ / ₈	162	4	11.00	4.99	11.00	4.99
	3 ¹ / ₂	90	6 ⁷ / ₈	175	4	12.75	5.78	–	–
	4	100	7 ¹¹ / ₁₆	195	5	18.00	8.16	18.00	8.16
	5	125	8 ¹⁵ / ₁₆	227	5	22.00	9.98	–	–
	6	150	10 ¹ / ₄	260	6	30.00	13.61	30.00	13.61
8	200	12 ¹⁵ / ₁₆	329	8	51.00	23.13	51.00	23.13	

Note: See page 37 for pressure-temperature ratings.