

Fig. 133 Fig. 134

Size Range: 4" through 12"

Material: Carbon steel

Finish: Plain or Galvanized

Service: Clamp centers the load on beam to prevent distortion

Approvals: Complies with Federal Specification A-A-1192A (Type 21) WW-H-171-E (Type 21), ANSI/MSS SP-69 and MSS SP-58 (Type 21).


Fig. 133 UL Listed when used with $\frac{3}{8}$ " and $\frac{1}{2}$ " rod.

Fig. 134 UL Listed and FM Approved when used with $\frac{1}{2}$ " and $\frac{5}{8}$ " rod.

Components: Two half-clamps, pipe spacer and bolt with nut assembled.

Ordering: Figure number, width of flange, name and finish.

Note: Spacer is furnished for use with Fig. 290 weldless eye nuts. Spacer may be removed for use with Fig 278 eye rods.

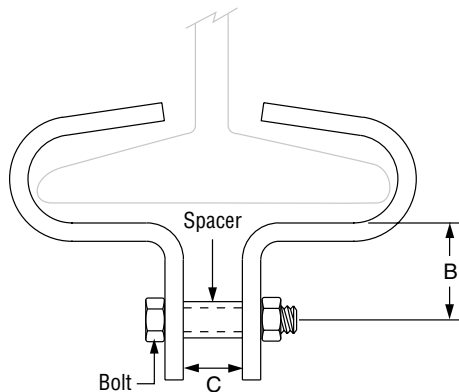

| Flange Size | | | |
|--------------|----------------------|--------------------|---------------------|
| Flange Width | Max Flange Thickness | Weight (lbs) | |
| | | Fig. 133 Std. Duty | Fig. 134 Heavy Duty |
| 4 | $\frac{1}{2}$ | 0.91 | 3.82 |
| 5 | $\frac{5}{8}$ | 1.00 | 4.35 |
| 6 | $\frac{3}{4}$ | 1.15 | 4.52 |
| 7 | $\frac{7}{8}$ | 1.29 | 4.84 |
| 8 | | 1.44 | 5.10 |
| 9 | 1 | — | 5.83 |
| 10 | | — | 6.25 |
| 11 | | — | 6.67 |
| 12 | | — | 7.09 |

Standard Duty Beam Clamp Heavy Duty Beam Clamp

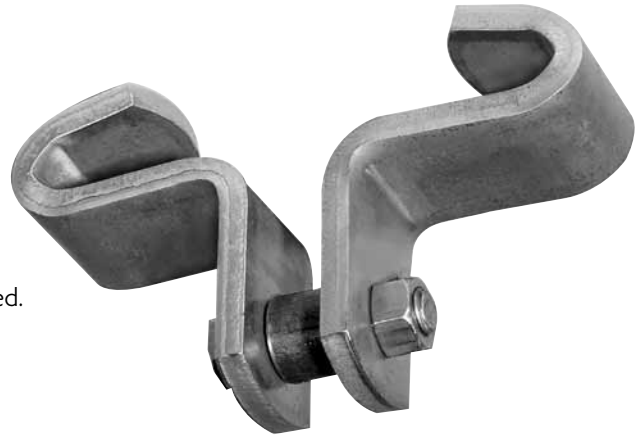


Fig. 133
Standard Duty



Fig. 134
Heavy Duty

| FIG. 133, 134: LOADS (LBS) • DIMENSIONS (IN) | | | | | |
|--|---------------|----------------|---------------|----------------|----------|
| | C | B | Bolt Size | Spacer O.D. | Max Load |
| Fig. 133 | $\frac{1}{2}$ | $1\frac{3}{8}$ | $\frac{3}{8}$ | $\frac{1}{16}$ | 1,000 |
| Fig. 134 | $\frac{3}{4}$ | $2\frac{1}{4}$ | $\frac{5}{8}$ | $\frac{1}{16}$ | 3,000 |

- Pictorial Table of Contents
- General Notes
- Copper Tubing Hangers
- CPVC Pipe Hangers
- Pipe Rings
- Clevis Hangers
- Steel Pipe Clamps
- Socket Clamps
- Beam Clamps**
- Structural Attachments
- Brackets
- Ceiling Plates & Flanges
- Concrete Inserts & Attachments
- Hanger Rods
- Rod Attachments
- Bolts, Nuts, Pins & U-Bolts