


HOSE BIBB • 150 PSI

CELCON®

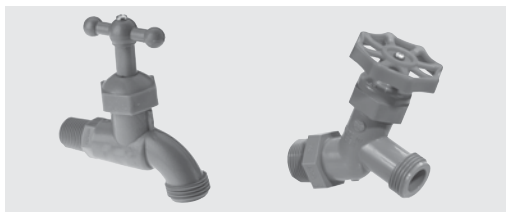

- Rated for 150 PSI at -20° to 180°F
- For use with hot or cold water
- Not for use with compressed air
- Pipe threads comply with ANSI B1.20.1
- Hose threads comply with ANSI B1.20.7
- Available in Handy Carton (HC) bin box packaging

Part No.	UPC-A (032888)	Valve Size	Inner/Master Carton Qty.	Master Weight (lbs.)
Standard				
I03-203	032033	1/2"	12/72	14
I03-204	032040	3/4"	12/72	14
I03-203HC	032033	1/2"	25/NA	5
I03-204HC	032040	3/4"	25/NA	5
No Kink				
I03-303	033030	1/2"	12/72	13
I03-304	033047	3/4"	12/72	13
I03-303HC	033030	1/2"	20/NA	4
I03-304HC	033047	3/4"	24/NA	4

HOSE BIBB • QUARTER TURN • NO KINK • 125 PSI

BRASS



- Easy quarter turn operation
- Maximum 125 PSI working pressure
- Meets NSF approved low lead standards
- UPC approved, complies to ASME A112.18.1 standards
- Chrome plated brass ball
- P.T.F.E. seats
- Rust resistant handle
- 3/4" hose thread outlet
- Pipe threads comply with ANSI B1.20.1
- Hose threads comply with ANSI B1.20.7
- Solder ends comply with ANSI-I6.18
- Patent no. D499172 valve body
- Patent no. D472962 valve handle

Part No.	UPC-A (032888)	Valve Size	Inner/Master Carton Qty.	Master Weight (lbs.)
Male				
I02-353HC ◇	000438	1/2"	25/NA	10
I02-354HC	000445	3/4"	25/NA	12
Female				
I02-453HC	000452	1/2"	25/NA	9
I02-454HC	000469	3/4"	25/NA	10

◇ = 1/2" Male external threads and 1/2" internal solder connection

TUBE & PIPE

METAL FITTINGS & NIPPLES

PLASTIC FITTINGS & NIPPLES

VALVES

FAUCETS & BATH ACCESSORIES

SPECIALTIES

