


CHEXTER® CHECK VALVE

The CHEXTER® Check Valves are designed to be used economically in a variety of commercial and industrial applications - including commercial construction, industrial, marine, utilities and process industries.

CHEXTER® Check valves meet the requirements of, and are approved for use by:

- General Services Administration
- U.S. Navy, the U.S. Coast Guard, U.S. Air Force and NASA
- Utility industry requirements for performance-Water, gas and compressed air lines

The CHEXTER® Check valve may be outfitted in a broad combination of metal trims allowing quick selection of the right valve for your application.

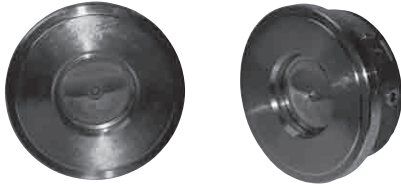

MODEL 1600-D

CLASS 125

Cast Iron body/Buna-N Seal

Facing: Flat Face Flange

- Size: 2" - 36" (50 - 900mm)

2" - 12"	200psi WOG @150°F
50 - 300mm	14 bar @ 66°C
14" - 24"	150psi WOG@150°F
350 - 600mm	10 bar @ 66°C
30" & Up	150psi WOG @ 150°F
900mm	10 bar @ 66°C

MODEL 1600-DE

CLASS 125

Cast Iron body/Buna-N Seal

Facing: Flat Face Flange

- Size: 2"-36" (50 - 900mm)

2" - 12"	200psi WOG @150°F
50 - 300mm	14 bar @ 66°C
14" - 24"	150psi WOG@150°F
350 - 600mm	10 bar @ 66°C
30" & Up	150psi WOG @ 150°F
900mm	10 bar @ 66°C

MODEL 1602-D

CLASS 250

Cast Iron body/Buna-N Seal

Facing: Raised Flange

- Size: 2" - 30" (50 - 760mm)

2" - 12"	500psi WOG @150°F
50 - 300mm	34 bar @ 66°C
14" - 24"	300psi WOG@150°F
350 - 600mm	21 bar @ 66°C
30"	300psi WOG @ 150°F
900mm	21 bar @ 66°C

MODEL 1602-DE

CLASS 250

Cast Iron body/Buna-N Seal

Facing: Raised Flange

- Size: 2" - 24" (50 - 600mm)

2" - 12"	500psi WOG @150°F
50 - 300mm	34 bar @ 66°C
14" - 24"	300psi WOG@150°F
350 - 600mm	21 bar @ 66°C

MODEL 1601-A

CLASS 150

Carbon Steel body/Buna-N Seal

Facing: Raised Flange

- Size: 2" - 30" (50 - 750mm)
- 285psi WOG @ 100°F
- 20 bar @ 38°C

MODEL 1601-AC

CLASS 150

Carbon Steel body/Teflon seal

Facing: Raised Flange

- Size: 2" - 30" (50 - 750mm)
- 285psi WOG @ 100°F
- 20 bar @ 38°C

MODEL 1601-AF

CLASS 150

Carbon steel body/Metal-to-metal seal

Facing: Raised Flange

- Size: 2" - 30" (50 - 750mm)
- 285psi WOG @ 100°F
- 20 bar @ 38°C

MODEL 1601-C

CLASS 150

316 SS body/Teflon seal

Facing: Raised Flange

- Size: 2" - 12" (50 - 300mm)
- 275psi WOG @ 100°F
- 19 bar @ 38°C

MODEL 1601-E

CLASS 150

Aluminum bronze body/Teflon seal

Facing: Raised Flange

- Size: 2" - 12" (50 - 300mm)
- 195psi WOG @ 100°F
- 13 bar @ 38°C