

CRANE[®]

Energy Flow Solutions

CRANE Air™ Rack & Pinion Actuators

CA Series Pneumatic Rotary Actuators

Product Features:

- Compact Design
- NAMUR Mounting
- Dual Travel Stops



CRANE[®]

Air

Features



Compact Design

The CRANE Air rack and pinion pneumatic actuator produces linear torque output in a compact design utilizing the same body and end caps for double acting and spring return units.

Namur Mounting

Namur VDI/VDE 3845 and ISO 5211 dimensions on all sizes. No special blocks are required to mount solenoid valves, limit switches or positioners.

Degree of Travel

The standard angle of rotation is 90°. Additional travel rotations of 120°, 135°, 150° and 180° are available. For sizes from CA02 and larger, CRANE Air features dual travel stops that provide $\pm 10^\circ$ stroke registration on both the opening and closing phases of the actuator stroke. 110° of travel in a standard 90° actuator.

Flexible Output Shafts

The female pinion drive is standard with a double-D drive, keyed drive and other designs are available upon request.

High Cycle Bearings

Shaft bearings isolate the pinion gear from the housing and support the shaft for high cycle applications. Many competitive manufacturers do not provide this critical feature.

Rugged Tooth Design

The pinion teeth are engaged the full length and stroke of the piston. The pinion height allows manual override without disturbing the indicated positions.

High Visibility Position Indication

External open/close indicator as standard, available for all the rotations.

High Cycle Life Wear Pads

Pistons incorporate double wear pads to separate the rack from the actuator wall and serve as both guide and wear bearings.

Pre-Loaded Spring Cartridges

Epoxy coated special steel springs are pre-loaded with non-metallic materials. The stainless steel end cap fasteners are extra long to allow for spring relaxation. All parts are corrosion resistant.

Alternative Operating Media

Air pressure operation from 40 - 100 PSI. Water, nitrogen and compatible hydraulic fluids may also be used to power the actuator.

Stainless Steel Fasteners

All external fasteners are corrosion resistant stainless steel.

Honed Bore for High Cycle Life

Extruded aluminum body is internally machined and lapped to extract specifications. Honing prevents dry spots from forming within the actuator bore and therefore eliminates premature seal failure - a critical aspect to long cycle life. All internal and external surfaces are hard anodized for corrosion resistance, with all units permanently lubricated at the factory with non-silicone grease.

Traceability

All units are externally stamped with a progressive traceable serial number

Quality Assurance

100% of all units are factory pressure and leak tested, and individually boxed for shipment.

Warranty

CRANE Air products are covered by our unlimited cycle life warranty. Contact your representative for more details.

Accessories

CRANE Air offers a wide range of adapters for many different types of valves, including butterfly, ball and plug valves. Please call for details.

Spring Return Torque Values CA-01 - CA08

Spring Return Torque Table Summary (in/lbs)



		Pos. 1 Closing Torque (Spring)		Pos. 2 - Opening Torque										
		# Springs			40 PSIG		60 PSIG		80 PSIG		100 PSIG		120 PSIG	
			Start	End	Start	End	Start	End	Start	End	Start	End	Start	End
CA01	1+1	33	22	40	29	72	61	103	92	134	123	165	154	
	2+2	66	44	--	--	50	28	81	59	112	90	143	121	
	3+3	99	66	--	--	--	--	58	27	90	66	121	88	
CA02	2+2	75	53	84	62	153	131	222	200	291	269	359	337	
	3+3	112	81	56	25	125	94	194	163	263	232	331	300	
	4+4	150	107	--	--	99	56	168	125	237	194	305	262	
	5+5	187	134	--	--	72	19	141	88	210	157	278	225	
CA03	7+5	224	160	--	--	--	--	115	51	184	120	252	188	
	2+2	93	64	116	87	206	177	296	267	386	357	476	447	
	3+3	139	96	84	41	174	131	264	221	354	311	444	401	
	4+4	185	128	--	--	142	85	232	175	322	265	412	355	
	5+5	232	160	--	--	110	38	200	128	290	218	380	308	
CA04	7+5	278	192	--	--	--	--	168	82	258	172	349	262	
	2+2	122	92	158	128	283	253	408	378	533	503	628	628	
	3+3	184	138	112	66	237	191	362	316	487	441	612	566	
	4+4	245	184	66	5	191	130	316	255	441	380	566	505	
	5+5	307	230	--	--	145	68	270	193	395	318	520	443	
CA05	7+5	369	278	--	--	97	6	222	131	347	256	472	381	
	2+2	196	124	251	179	438	366	626	554	813	741	1001	929	
	3+3	294	185	190	81	377	268	565	456	752	643	940	831	
	4+4	392	247	--	--	315	170	503	358	690	545	878	733	
	5+5	490	309	--	--	253	72	441	260	628	447	816	635	
CA06	7+5	588	372	--	--	--	--	378	162	565	349	753	537	
	2+2	251	187	313	249	563	499	813	749	1063	999	1313	1249	
	3+3	376	280	220	124	470	374	720	624	970	874	1220	1124	
	4+4	502	374	--	--	376	248	626	498	876	748	1126	998	
	5+5	627	467	--	--	283	123	533	373	783	623	1033	873	
CA07	7+5	753	560	--	--	--	--	440	247	690	497	940	747	
	2+2	412	306	494	388	894	788	1294	1188	1694	1588	2094	1988	
	3+3	617	461	339	183	739	583	1139	983	1539	1383	1939	1783	
	4+4	824	614	--	--	586	376	986	776	1396	1176	1786	1576	
	5+5	1029	767	--	--	433	171	833	571	1233	971	1633	1371	
CA08	7+5	1236	921	--	--	--	--	679	364	1079	764	1479	1164	
	2+2	505	371	629	495	1129	995	1629	1495	2129	1195	2629	2495	
	3+3	757	556	444	243	944	743	1444	1243	1944	1743	2444	2243	
	4+4	1011	741	--	--	759	489	1259	989	1759	1489	2259	1989	
	5+5	1263	929	--	--	572	237	1072	737	1572	1237	2072	1737	
	7+5	1516	1113	--	--	--	--	887	484	1387	984	1887	1484	

For torque table help see page 6.

Spring Return Torque Values CA09 - CA15

Spring Return Torque Table Summary (in/lbs)


		Pos. 1 - Closing Torque (Spring)				Pos. 2 - Opening Torque							
				40 PSIG		60 PSIG		80 PSIG		100 PSIG		120 PSIG	
	# Springs	Start	End	Start	End	Start	End	Start	End	Start	End	Start	End
CA09	2+2	890	560	1002	672	1784	1454	2565	2235	3346	3016	4127	3797
	3+3	1334	840	722	228	1504	1010	2285	1791	3066	2572	3847	3353
	4+4	1779	1120	--	--	1224	565	2005	1346	2786	2127	3567	2908
	5+5	2224	1399	--	--	945	120	1726	901	2507	1682	3288	2463
	7+5	2669	1679	--	--	--	--	1446	456	2227	1237	3008	2018
CA10	2+2	1101	869	1381	1149	2506	2274	3631	3399	4756	4524	5881	5649
	3+3	1652	1304	946	598	2071	1723	3196	2848	4321	3973	5446	5098
	4+4	2203	1738	512	47	1637	1172	2762	2297	3887	3422	5012	4547
	5+5	2754	2173	--	--	1202	621	2327	1749	3452	2871	4577	3996
	7+5	3303	2607	--	--	768	72	1893	1197	3018	2322	4143	3447
CA11	2+2	1487	1055	1945	1513	3445	3013	4945	4513	6445	6013	7945	7513
	3+3	2231	1583	1417	769	2917	2269	4417	3769	5917	5296	7417	6769
	4+4	2974	2111	889	26	2389	1526	3889	3026	5389	4526	6889	6026
	5+5	3718	2638	--	--	1862	782	3362	2282	4862	3782	6362	5282
	7+5	4462	3166	--	--	1334	38	2834	1538	4334	3038	5834	4538
CA12	2+2	2146	1711	2839	2404	5114	4679	7389	6954	9664	9229	11929	11504
	3+3	3220	2566	1984	1330	4259	3605	6534	5880	8809	8155	11084	10430
	4+4	4293	3422	1128	257	3403	2532	5678	4807	7953	7082	10228	9657
	5+5	5366	4277	--	--	2548	1459	4823	3734	7098	6009	9373	8284
	7+5	6438	5133	--	--	1692	387	3967	2662	6242	4937	8517	7212
CA13	2+2	2810	2084	3916	3190	6916	6190	9916	9190	12916	12190	15916	15190
	3+3	4215	3126	2874	1785	5874	4785	8874	7785	11874	10785	14874	13785
	4+4	5619	4269	1831	381	4831	3381	7831	6381	10831	9381	13831	12381
	5+5	7024	5211	--	--	3789	1976	6789	4976	9789	7976	12789	10976
	7+5	8430	6252	--	--	--	--	5748	3570	8748	6570	11748	9570
CA14	1+1	2123	1534	10216	9627	16091	15502	21966	21377	27841	27252	33716	33127
	2+2	4247	3068	8682	7503	14557	13378	20432	19253	26307	25128	32182	31003
	3+3	6370	4602	7148	5380	13023	11255	18898	17130	27773	23005	30648	28880
	4+4	8493	6136	5614	3257	11489	9132	17364	15007	23239	20882	29114	26757
	5+5	10617	7670	--	--	9955	7008	15830	12883	21705	18758	27580	24633
	6+6	12740	9204	--	--	8421	4885	14296	10760	20171	16635	26046	22510
	7+7	14863	10737	--	--	--	--	12763	8637	18638	14512	24513	20387
	8+8	16987	12271	--	--	--	--	11229	6513	17104	12388	22979	18263
CA15	1+1	2843	1784	13966	12907	21841	20782	29716	28657	37591	36532	45466	44407
	2+2	5686	3569	12181	10064	20056	17939	27931	25814	35806	33689	43681	41564
	3+3	8530	5353	10397	7220	18272	15095	26147	22970	34022	30845	41897	38720
	4+4	11373	7137	8613	4377	16488	12252	24363	20127	32238	28002	40113	35877
	5+5	14216	8922	--	--	14703	9409	22578	17284	30453	25159	38328	33034
	6+6	17059	10706	--	--	12919	6566	20794	14441	28669	22316	36544	30191
	7+7	19902	12490	--	--	--	--	19010	11598	26885	19473	34760	27384
	8+8	22746	14275	--	--	--	--	17225	8754	25100	16629	32975	24504

For torque table help see page 6.

Double Acting Torque Values CA-01 - CA15


Double Acting Torque Table Summary (in/lbs)

TYPE	40 PSIG	60 PSIG	80 PSIG	100 PSIG	120 PSIG
CA01	62	94	125	156	187
CA02	137	206	275	344	412
CA03	180	270	360	450	540
CA04	250	375	500	625	750
CA05	375	562	750	937	1125
CA06	500	750	1000	1250	1500
CA07	800	1200	1600	2000	2400
CA08	1000	1500	2000	2500	3000
CA09	1562	2344	3125	3906	4687
CA10	2250	3375	4500	5625	6750
CA11	3000	4500	6000	7500	9000
CA12	4550	6825	9100	11375	13650
CA13	6000	9000	12000	15000	18000
CA14	11750	17625	23500	29375	35250
CA15	15750	23625	31500	39375	47250

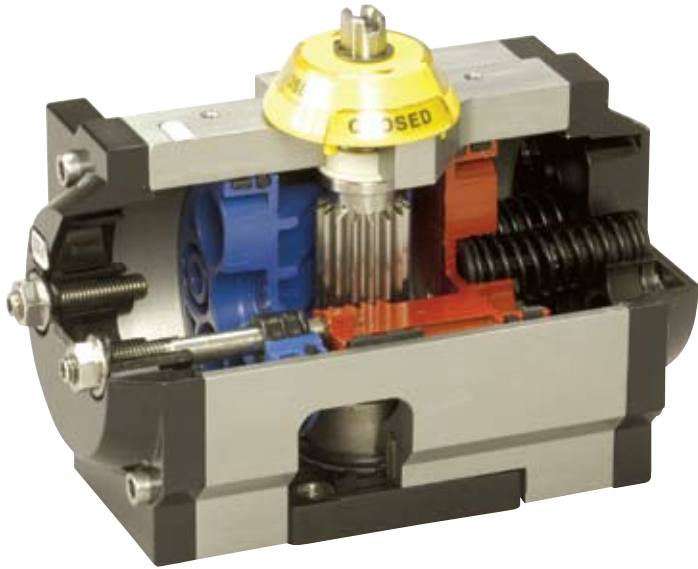


TORQUE TABLE HELP



DOUBLE ACTING

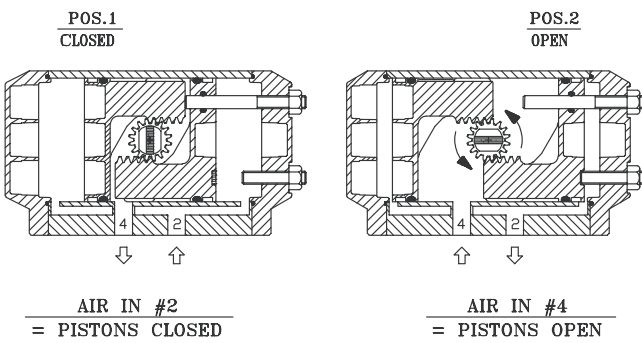

↑ = AIR IN ↓ = AIR OUT

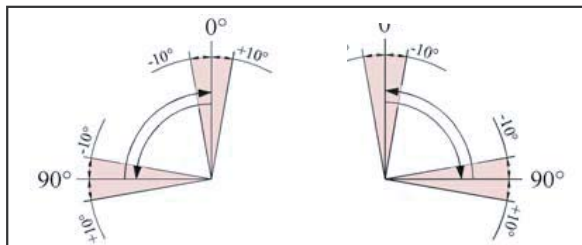

SPRING RETURN

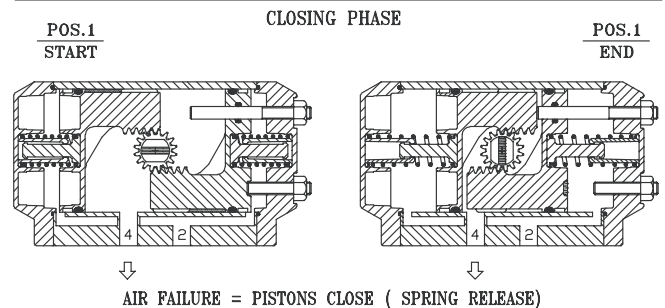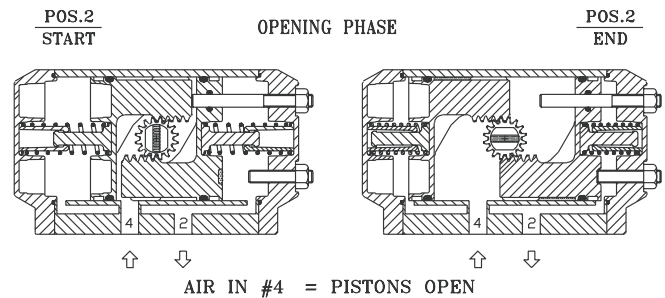

Actuation Capabilities

Crane Energy Flow Solutions offers a complete line of accessories for all of your actuation needs:



Solenoids:

- 3-way
- 4-way
- UL Listed
- FM Approved/Cenelec
- NEMA
- Explosion Proof

Positioners - C100 Series:

- Single Cast Aluminum Housing for All Types
 - Pneumatic (C100P)
 - Electro-pneumatic (C100E)
 - Explosion Proof (C100EX)
- Powder-polyester Coated Housing
- Stainless Steel, Retained Fasteners
- NEMA 4X and IP66 Protection
- Available Drives: NAMUR, ½" Square and Others
- Maintenance-friendly Pilot Valve
- Simple Calibration – External Zero Adjustment



Limit Switches - CLS Series:

- Economical Resin Housing (CCR Series)
- Stainless or Epoxy Coated Aluminum (CCA Series)
- Explosion Proof Housing (CXA Series)
- Visual and Remote Indication
- 2-wire ASi Interface
- NEMA 4, 4X Class I Division 2
- ATEX, Cenelec, UL and CUL Certifications
- Mechanical or Inductive Proximity Switches
- Wireless, Dribble Control Options

Other Capabilities:

- Manual Gear Overrides
- Speed Controls
- Filter Regulators
- Custom Hardware/Linkage Kits
- Stem Extensions
- 3-way Assemblies