

900xL


Stereo Audio Power Amplifier (10 Watts per Channel)



The **900xL** is a high-performance power amplifier for line level stereo audio signals. The unit accepts unbalanced audio signals on either two RCA or 3.5mm connectors and delivers a speaker output of 10 watts RMS per channel into a 4Ω load.

FEATURES

- Input - 2 RCA and 3.5mm mini jack.
- Output - 4-pin terminal block.
- S/N - 60dB.
- Control - Volume & input selection from front panel & RS-232.
- Compact Kramer TOOLS™ - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

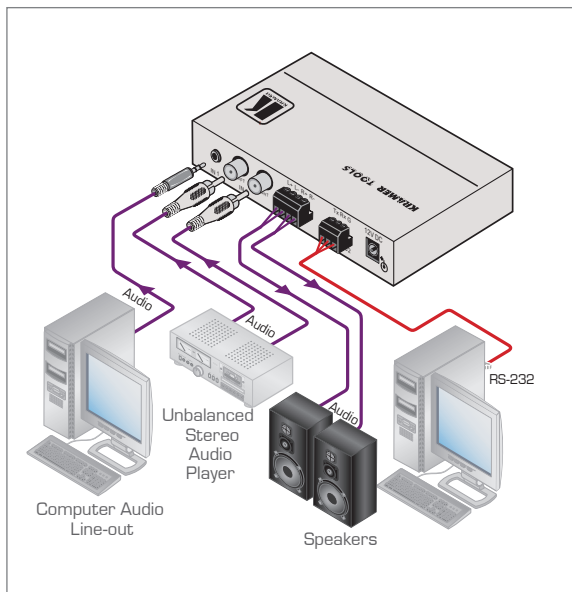

TECHNICAL SPECIFICATIONS

INPUTS:	1 unbalanced stereo audio on a 3.5mm mini-jack connector; 2 unbalanced stereo audio on RCA connectors.
OUTPUTS:	1 stereo differential speaker output.
OUTPUT POWER:	2x10W (4Ω).
OUTPUT MUSIC POWER:	2x40W (4Ω).
BANDWIDTH (-3dB):	25kHz.
S/N RATIO:	60dB.
CONTROLS:	Gain range: -14.8 to +32dB at high-gain; -21.3 to +20.2dB at low-gain.
COUPLING:	Input: AC; output: DC.
AUDIO THD + NOISE:	2.2%.
AUDIO 2nd HARMONIC:	1.2%.
POWER SOURCE:	12V DC, 2.3A DC.
DIMENSIONS:	12cm x 7.5cm x 2.5cm (4.7" x 3.0" x 1.0") W, D, H.
WEIGHT:	0.2kg (0.4lbs) approx.
ACCESSORIES:	Power supply.
OPTIONS:	RK-3T 19" rack adapter.

