


# VS-88HCB

## 8x8 Universal Matrix Switcher

NEW



SWITCHERS & ROUTERS

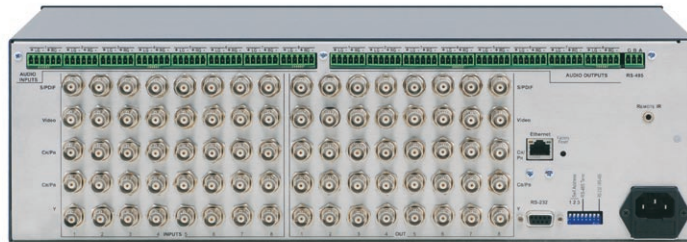

The **VS-88HCB** is a high-performance universal matrix switcher for composite video, s-video (Y/C) component video (Y, Pb, and Pr), balanced stereo audio and S/PDIF digital audio signals. It can route any or all inputs to any or all outputs simultaneously.

### FEATURES

- High Bandwidth - 300MHz (-3dB), fully loaded.
- HDTV Compatible.
- Control - Front panel, RS-232 (K-Router™ Windows®-based software is included), RS-485, Ethernet, & IR remote (included) & remote IR receiver (optional).
- Separate Composite Video & Component Video Inputs.
- Take Button - Executes multiple switches all at once.
- Memory Locations - Stores multiple switches as presets to be recalled and executed when needed.
- Analog Stereo Audio Breakaway Switching.
- Standard 19" Rack Mount Size - 3U. Rack "ears" included.

### TECHNICAL SPECIFICATIONS

INPUTS:	5x8 composite video 1Vpp/75Ω and S/PDIF digital audio or s-Video 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C); and component video 1Vpp/0.7Vpp/75Ω on BNC connectors 8 balanced stereo audio, +4dBm/33kΩ, on detachable terminal blocks.
OUTPUTS:	5x8 composite video 1Vpp/75Ω and S/PDIF digital audio or s-Video 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C); and component video 1Vpp/0.7Vpp/75Ω on BNC connectors 8 balanced stereo audio, +4dBm/150Ω, on detachable terminal blocks.
MAX. OUTPUT LEVEL:	Video: 2.8Vpp; Audio: 24Vpp.
BANDWIDTH (-3dB):	Video: 300MHz, fully loaded; Audio: 100kHz.
S/N RATIO:	Video: 74dB; Audio: 84dB unweighted, (1Vpp).
CROSSTALK (all hostile):	Video: <-50dB @5MHz.
CONTROLS:	Manual, RS-232, RS-485 and ETHERNET.
AUDIO THD:	0.025% (1V, 1kHz).
POWER SOURCE:	100 - 240V AC, 50/60Hz, 23VA.
DIMENSIONS:	19" x 7" x 3U, rack mountable.
WEIGHT:	5.5kg (12.2lbs) approx.
ACCESSORIES:	Power cord, Windows® based Ethernet Configuration Manager and Virtual Serial Port Manager, Windows® based Kramer control software, null-modem adapter, rack "ears".
OPTIONS:	External remote IR receiver cable.

