

VM-28H (VM-28HDMI*)/VM-216H (VM-216HDMI*)


2x1:8 HDMI Distribution Amplifier



The **VM-28H** and **VM-216H** are distribution amplifiers for HDMI signals. They reclock and equalize one of 2 selectable input signals and distribute it to 8 or 16 identical outputs.

FEATURES

- Max. Data Rate - 2.25Gbps.
- HDTV Compatible.
- HDCP Compliant.
- HDMI Support - HDMI (V.1.4 with Deep Color, x.v.Color™, Lip Sync, HDMI Uncompressed Audio Channels, Dolby TrueHD, DTS-HD, CEC).
- 3D Pass-Through.
- I-EDIDPro™ Kramer Intelligent EDID Processing™ - Intelligent EDID handling & processing algorithm ensures Plug and Play operation for HDMI systems.
- Kramer Equalization & re-Klocking™ Technology - Rebuilds the digital signal to travel longer distances.
- Control - RS-232.
- Active Output LED Indicators.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.

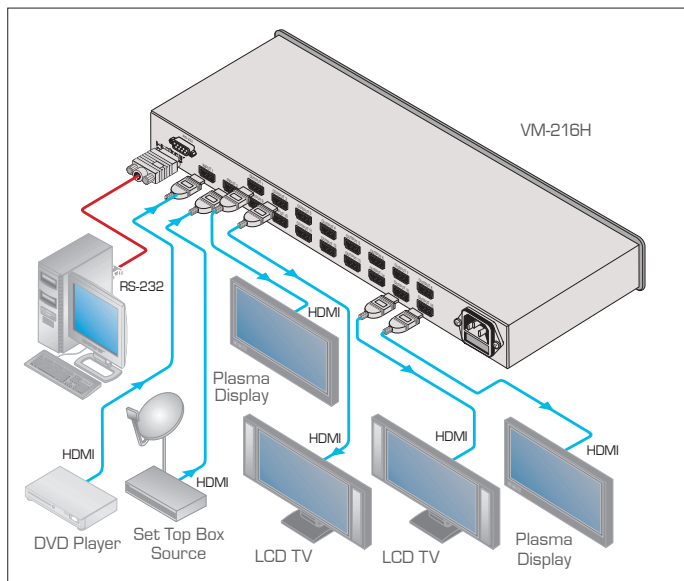

*Previous product name

TECHNICAL SPECIFICATIONS

INPUTS:	2 on HDMI connectors.
OUTPUTS:	8/16 on HDMI connectors.
BANDWIDTH:	Supports up to 2.25Gbps bandwidth per graphic channel.
COMPLIANCE WITH HDMI STANDARD:	Supports HDMI and HDCP.
CONTROLS:	EDID, IN 1, IN 2, IR remote controller and LOCK buttons.
INDICATOR LEDs:	Output status LEDs.
POWER SOURCE:	100-240V AC, 50/60Hz, 28VA (VM-28H), 48VA (VM-216H).
DIMENSIONS:	19" x 7" x 1U W, D, H, rack mountable.
WEIGHT:	2.5kg (5.5lbs) approx.
ACCESSORIES:	Power cord, IR remote control transmitter, rack "ears".
OPTIONS:	HDMI/HDMI male-to-male cables, fiber optic HDMI Cable (C-FOHM/FOHM), external remote IR receiver cable.

