

VP-414xl

Video to Computer Graphics Video/HDTV ProScale™ Digital Scaler (up to WUXGA/1080p)




Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.



The VP-414xl is a high-performance digital scaler for composite video and s-Video (Y/C) signals. The unit scales a video signal to a selectable computer graphics video or HDTV output signal on a 15-pin HD connector.

FEATURES

- Multi-Standard - PAL-B & NTSC (3.58).
- HDTV Compatible.
- Input - Composite video or s-Video.
- Output - 1 computer graphics/HDTV video on a 15-pin HD connector.
- Computer Graphics Output Resolutions - VGA (640x480), SVGA (800x600), XGA (1024x768), WXGA (1366x768), SXGA (1280x1024), UXGA (1600x1200) and WUXGA (1920x1200 PAL only).
- HDTV Output Resolutions - 480p, 576p, 720p, 1080i, and 1080p in component format on the 15-pin HD output connector.
- Control - Front panel input source and output resolution buttons with LED status & contact closure for input selection.
- 3D De-Interlacer.
- 3D Comb Filter.
- Compact MegaTOOLS® - 2 units can be rack mounted side-by-side in a 1U rack space with the optional RK-T2B rack adapter.

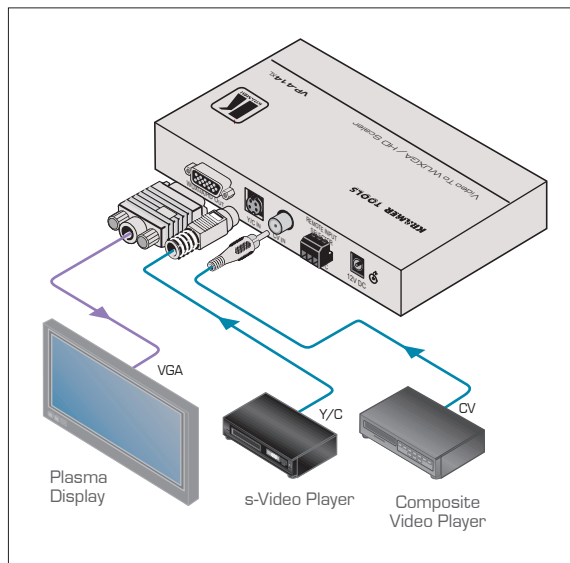

TECHNICAL SPECIFICATIONS

INPUT:	1 CV 1Vpp/75Ω on an RCA connector; 1 Y/C: 1Vpp/75Ω (Y), 0.3Vpp 75Ω (C) on a 4-pin connector.
OUTPUT:	1 VGA (VGA through WUXGA) HD on a 15-pin HD computer graphics video connector.
OUTPUT RESOLUTION:	VGA (640x480), SVGA (800x600), XGA (1024x768), WXGA (1366x768), SXGA (1280x1024), UXGA (1600x1200) and WUXGA (1920x1200 PAL only), 480p, 576p, 720p 1080i, and 1080p (the output Y signal has a bi-level SYNC).
OUTPUT REFRESH RATE:	60Hz for computer graphics resolutions, 50/60Hz for HDTV resolutions.
CONTROLS:	Push buttons and LEDs for selection of input source and output resolution; Y/C-CV dry contact input selector (external wires).
POWER SOURCE:	12V DC, 500mA (typical).
DIMENSIONS:	18.8cm x 11.4cm x 2.4cm (7.41" x 4.5" x 0.95") W, D, H.
WEIGHT:	0.4kg (0.88lbs) approx.
ACCESSORIES:	Power supply.
OPTIONS:	RK-T2B 19" rack adapter.

