






The VS-81X is a high-performance switcher for balanced mono audio signals on XLR connectors. It switches any one of eight signals to a single output.

FEATURES

- Mechanical (Passive) Switching No power required.
- Desktop Size Compact size. Can be rack mounted in a 1U rack space with the optional RK-81X adapter.

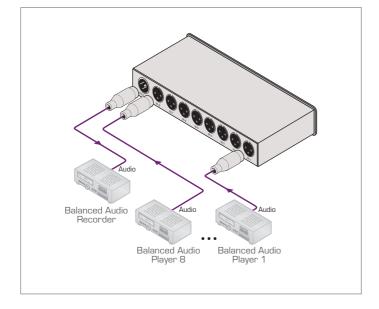

TECHNICAL SPECIFICATIONS

INPUTS: 8 balanced stereo audio,

line or mic level, on XLR connectors.

OUTPUT: 1 balanced stereo audio, line or mic level, on an XLR connector.

BANDWIDTH (-3dB): 25kHz.

SWITCHING SYSTEM: Mechanical, break-before-make.

CROSSPOINTS: 1 of 8.

SIGNAL LEVELS: Up to +30dBu. DIMENSIONS:

25.5cm x 10.2cm x 4.5cm (10" x 4" x 1.8") W, D, H. 0.82kg (1.8lbs) approx.

WEIGHT: RK-81X 19" rack adapter. OPTIONS:

