


AVO-SVA2-F System Drawing



AVO-SVA2-F

S-video & stereo audio over Cat 5 balun

The Intelix AVO-SVA2-F transmits S-video and stereo audio up to 1,000 feet over standard twisted pair cable.

- ▶ S-video and stereo audio up to 1,000 feet
- ▶ 20 Hz to 20 kHz high-fidelity audio
- ▶ 4-pin S-video (video) and RCA (audio) connectors
- ▶ compatible with the AVO-SVA2-WP-F wallplate balun
- ▶ 4.3" x 2.5" x 1.0"

Part Number: **AVO-SVA2-F**




AVO-V2A2-F

Dual composite video & stereo audio balun


The Intelix AVO-V2A2-F transmits dual composite video and stereo audio up to 2,200 feet over standard twisted pair cable.

- ▶ dual composite video and stereo audio up to 2,200 feet
- ▶ 20 Hz to 20 kHz high-fidelity audio
- ▶ four gold-plated RCA connectors
- ▶ compatible with the AVO-V2A2-WP-F wallplate balun
- ▶ 4.3" x 2.5" x 1.0"

Part Number: **AVO-V2A2-F**

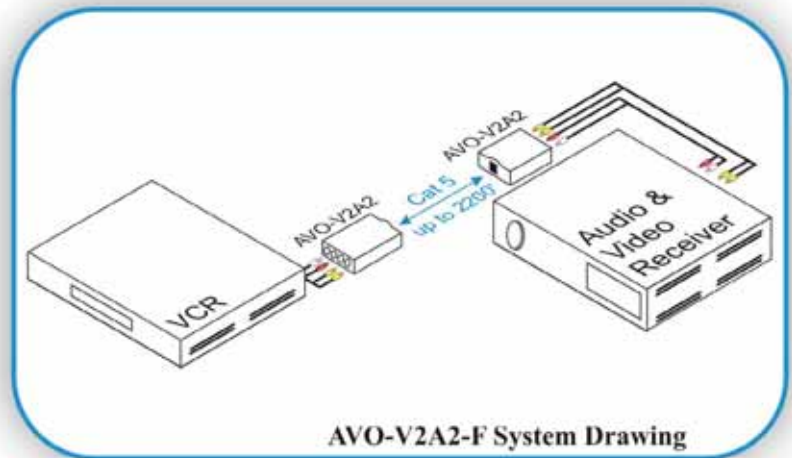

AVO-V2A2-F System Drawing

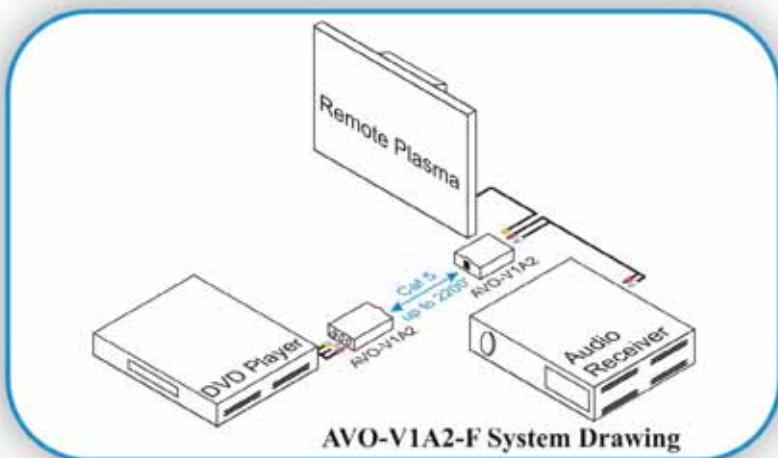

AVO-V1A2-F System Drawing



AVO-V1A2-F

Composite video & stereo audio over Cat 5 balun

The Intelix AVO-V1A2-F transmits composite video and stereo audio up to 2,200 feet over standard twisted pair cable.

- ▶ composite video and stereo audio up to 2,200 feet
- ▶ 20 Hz to 20 kHz high-fidelity audio
- ▶ BNC (video) and RCA (audio) connectors
- ▶ compatible with the AVO-V1A2-WP-F wallplate balun
- ▶ compact design
- ▶ 4.3" x 2.5" x 1.0"

Part Number: **AVO-V1A2-F**

