
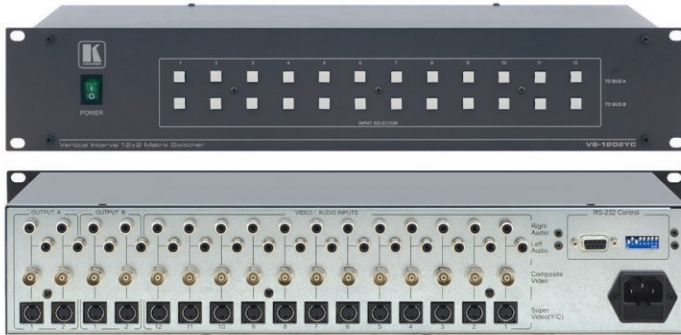


VS-1202YC


12x2:2 Composite/s-Video & Stereo Audio Matrix Switcher



The **VS-1202YC** is a high-performance matrix switcher for composite video, s-Video (Y/C) and unbalanced stereo audio signals. Switching during the vertical interval ensures glitch-free switching with genlocked sources.

FEATURES

- Bandwidth (Y) - 37MHz (-3dB) fully loaded.
- Control - Front panel & RS-232 (K-Router™ Windows®-based Kramer software is included).
- Vertical Interval Switching.
- Standard 19" Rack Mount Size - 2U.

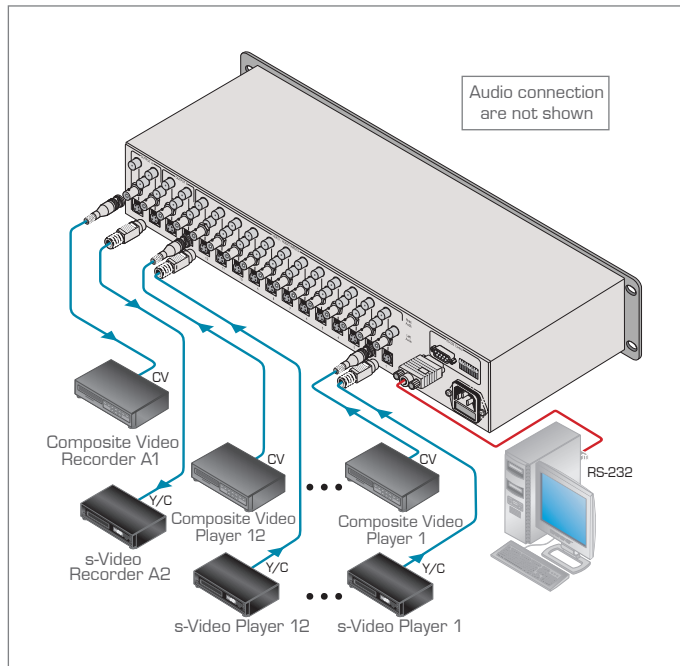

TECHNICAL SPECIFICATIONS

INPUTS:	12 composite video, 1Vpp/75Ω on BNC connectors; 12 Y/C, 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on 4-pin connectors; 12 unbalanced stereo audio 10kΩ on RCA connectors.
OUTPUTS:	2x2 composite video, 1Vpp/75Ω on BNC connectors; 2x2 Y/C, 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on 4-pin connectors; 2x2 unbalanced stereo audio 1V/100Ω on RCA connectors.
BANDWIDTH (-3dB):	Video: 37MHz; Audio: 20kHz.
DIFF. GAIN:	0.4%
DIFF. PHASE:	0.9Deg.
K-FACTOR:	<0.05%
VIDEO S/N RATIO:	74dB.
AUDIO S/N RATIO:	80dB.
CROSSTALK:	-40dB @5MHz.
CONTROL:	24 illuminated front panel buttons, RS-232.
OUTPUT COUPLING:	DC, clamped.
SWITCHING:	Vertical interval.
AUDIO THD:	0.02%.
POWER SOURCE:	230V AC, 50/60Hz (115V AC USA), 11.5VA.
DIMENSIONS:	19" x 7" x 2U W, D, H, rack mountable.
WEIGHT:	3.7kg (8.2lbs) approx.
ACCESSORIES:	Power cord, Windows®-based Kramer control software, null-modem adapter.



2.80

KRAMER ELECTRONICS, Ltd
 DIRECTORY OF PRODUCTS 2011/2012
 WWW.KRAMERELECTRONICS.COM