

Commercial Post/Yard Hydrants



**NON-FREEZE POST HYDRANT
WITH 1-1/4" (32), 1-1/2" (38)
OR 2" (51) INLET AND HOSE
CONNECTION**



FIG. # 5912, 5913, AND 5914


Post Hydrant

FUNCTION:

Used where an above ground water outlet is required in areas which are subject to freezing temperatures. Freezing is prevented by burying the valve housing below the frost line and draining water from the casing after shut-off. The hydrant is available with a 1-1/4"(32), 1-1/2" (38) or 2" (51) inlet and hose connection.

PRODUCT FEATURES:

- 1-1/4" (32), 1-1/2" (38) or 2" (51) inlet and hose connection
- Loose fit "T" handle key
- Bronze hydrant and cast iron casting guard
- Commercial and light commercial construction applications
- Replacement parts are available in kit HPRK -5.

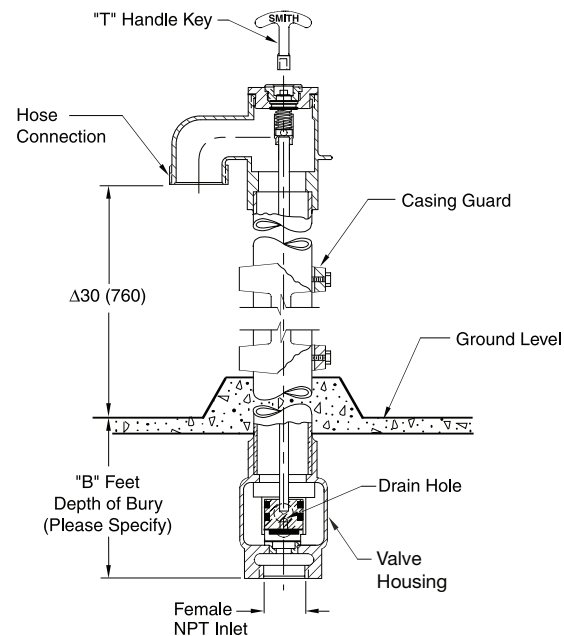

Regularly Furnished:

Bronze Non-Freeze Post Hydrant with Cast Iron Casing Guard, and "T" Handle Key. Inlet and Hose Connection Size Furnished as Indicated by Figure Number Selected.

Variations:

- 1/8" (3) NPT Drain Hole -NV
- Secured Wheel Handle -WH

Optional Materials:

- Aluminum Casing Guard -AG

NOTE: Dimensions shown in parentheses are in millimeters.

NOTE: All Jay R. Smith Mfg. Co. hydrants are manufactured with "NO-LEAD" brazing rings and USDA approved lubricants.

Inlet and Hose Connections:

- Fig. 5912.....1 1/4" (32)
- Fig. 5913.....1 1/2" (38)
- Fig. 5914.....2" (51)