

Commercial Boxed Wall Hydrants



**MILD CLIMATE, ANTI-SIPHON
SILLCOCK AND STAINLESS
STEEL BOX**



FIG. # 5572, 5573, 5572 (-BFP), 5573 (-BFP)


Mild Climate, Anti-Siphon Sillcock
and Stainless Steel Box

FUNCTION:

Exposed anti-siphon wall faucet for mild climate installations. Complete with external vacuum breaker, rough brass or chrome finish, black handle, brass casing, bronze interior parts, and 3/4" (19) male hose connection. Loose key provided with each sillcock.

PRODUCT FEATURES:

- Used in mild climate areas on homes, service stations, churches, motels, and fast food restaurants and in garden, lawn, and other water systems
- Flush installation to eliminate catch points
- Stainless steel box with full 180° cover opening
- 16 gauge steel frame cover and 20 gauge housing, type 304 stainless
- A vacuum breaker, backflow protected wall sillcock
- Vacuum breaker complies with ASSE Standard 1011
- IAPMO Listed, File No. 3856
- Loose key furnished with each sillcock
- Specify Fig. # 5572 (-BFP), 5573 (-BFP) for ASSE 1052 Dual Check Valve

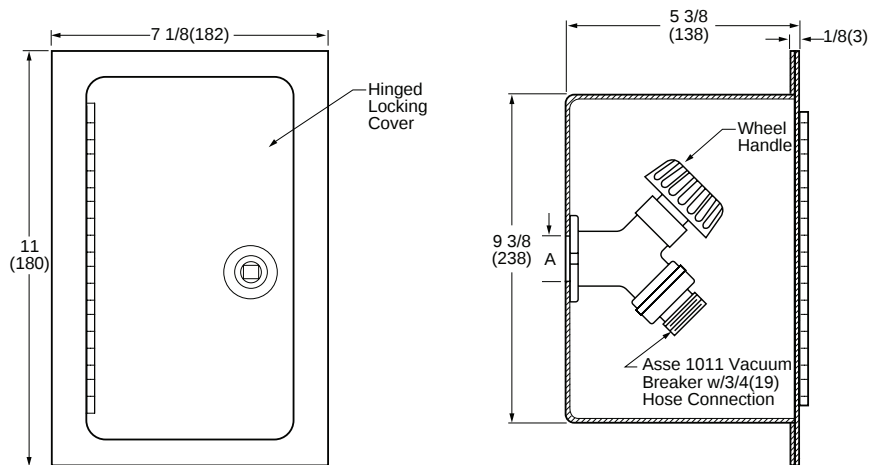

A (Inlet Size) = 1/2(13) or 3/4(19)

Fig. 55721/2"(13) Female NPT Inlet
Fig. 55733/4"(19) Female NPT Inlet

Regularly Furnished:

Hose Valve has a Rough Finish Brass Body, Removable Wheel Handle, "T" Handle Key, NPT Female Threaded Inlet Size Indicated by Figure Number Selected, ASSE 1011 Vacuum Breaker with 3/4" (19) Hose Connection and Stainless Steel Box with Full 180° Cover Opening.

NOTE: Dimensions shown in parentheses are in millimeters.

Variations:

- Dual Check Valve -BFP

