


ROOF DRAINS

FIG. 1085 RAINROL® ROOF DRAINS

FUNCTION: Used to control the flow of rain water off a roof. Trapezoidal weirs limit the flow to the leader. Adjustable to provide various flow rates as required.

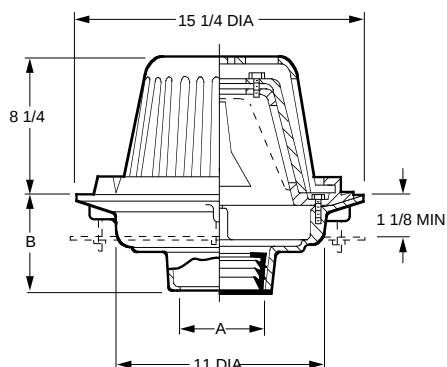

A OUTLET SIZE	FLANGE DIA	FREE AREA SQ IN	†DUCO CI CI DOME	APPROX. WEIGHT LBS
02, 03, 04"	15 1/4"	122	1,271.00	66
05, 06"	15 1/4"	122	1,455.00	72

REGULARLY FURNISHED: Duco Cast Iron Body with Combined Flashing Clamp and Gravel Stop with Adjustable "Flow Rate Control" Assembly and Cast Iron Dome.

OUTLET VARIATIONS (Specify type of outlet and pipe size in inches.)

Outlet Type	Outlet Designation Outlet Type/Pipe Size	"B" Body HT. DIM.	ADD
Inside Caulk	C02, C03, C04, C05, C06	5"	N/C
Speedi-Set SW	L02, L03, L04	5"	N/C
Speedi-Set XH	LXH02, LXH03, LXH04	5"	N/C
Threaded	T02, T03, T04, T05, T06	3 3/4"	47.00
No-Hub	Y02, Y03, Y04, Y05, Y06	5"	N/C

OPTIONS:


	ADD
-C Aluminum Underdeck Clamp	146.00
-C2 Secondary Flashing Clamp	112.00
-CIDG Galvanized Cast Iron Dome	218.00
-CL Angular Underdeck Clamp	296.00
-DE Deck Elevator Extension	627.00
-E Extension up to 4"	402.00
per inch over 4"	95.00
-G Galvanized Cast Iron	582.00
-R Sump Receiver	164.00
-RDP Roof Deck Plate	264.00
-U Vandal Proof Dome	75.00
-WR Multiple Weir Openings**	N/C

**Specify Number of Weir Openings

FIG. 1088 RAINROL® ROOF DRAINS

FUNCTION: Used to control the flow of rain water off a roof. Trapezoidal weirs limit the flow to the leader. Adjustable to provide various flow rates as required.

**1088
Same as
1083 with
Side
Outlet**

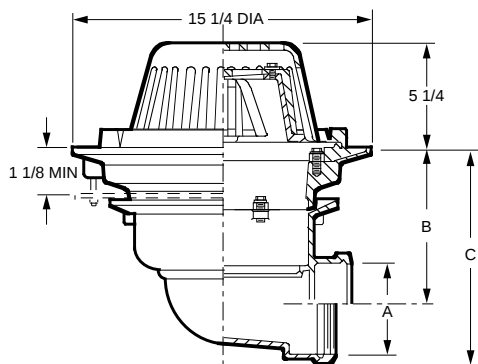

A OUTLET SIZE	FLANGE DIA.	B	FREE AREA SQ IN	†DUCO CI POLY DOME	APPROX. WEIGHT LBS
02"	15 1/4"	6 7/8"	102.5	1,370.00	81
03"	15 1/4"	6 3/8"	102.5	1,370.00	81
04"	15 1/4"	5 7/8"	102.5	1,370.00	81

REGULARLY FURNISHED: Duco Cast Iron Body with Combined Flashing Clamp and Gravel Stop with Adjustable "Flow Rate Control" Assembly and Cast Iron Dome.

OUTLET VARIATIONS (Specify type of outlet and pipe size in inches.)

Outlet Type	Outlet Designation Outlet Type/Pipe Size	"C" Body HT. DIM.	ADD
Inside Caulk	C02	8 5/8"	N/C
	C03, C04	8 3/4"	N/C
Threaded Outlet	T02	8 5/8"	N/C
	T03, T04	8 3/4"	N/C
No-Hub	Y02	8 5/8"	N/C
	Y03, Y04	8 3/4"	N/C

OPTIONS:

	ADD
-AD Aluminum Dome	149.00
-C Aluminum Underdeck Clamp	146.00
-C2 Secondary Flashing Clamp	112.00
-CID Cast Iron Dome	128.00
-CIDG Cast Iron Dome with Galvanizing	346.00
-CID8 8" High Cast Iron Dome	279.00
-CL Angular Underdeck Clamp	296.00
-E 4" High Extension	402.00
per inch over 4"	95.00
-G Galvanized Cast Iron Body	582.00
-RBD Rough Bronze Dome	504.00
-R Sump Receiver	164.00
-U Vandal Proof Dome	75.00
-WR Multiple Weir Openings**	N/C

**Specify Number of Weir Openings