



# Commercial Post/Yard Hydrants

## NON-FREEZE POST HYDRANT WITH 3/4" (19) OR 1" (25) INLET HOSE CONNECTION



### FIG. # 5910 AND 5911


Post Hydrant

#### FUNCTION:

Used where an above ground water outlet is required in areas which are subject to freezing temperatures. Freezing is prevented by burying the valve housing below the frost line and draining water from the casing after shut-off. The hydrant is available with a 3/4" (19) or 1" (25) inlet and hose connection.

#### PRODUCT FEATURES:

- 3/4" (19) or 1" (25) inlet and hose connection
- Loose fit "T" handle key
- Bronze hydrant and cast iron casing guard
- Commercial and light commercial construction applications
- Replacement parts are available in kit HPRK-41.

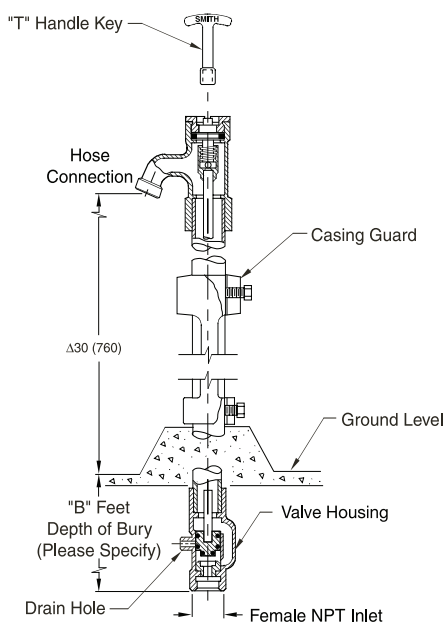

**NOTE:** Dimensions shown in parentheses are in millimeters.

**NOTE:** All Jay R. Smith Mfg. Co. hydrants are manufactured with "NO-LEAD" brazing rings and USDA approved lubricants.

**NOTE:** Addition of a vacuum breaker will not allow draining of the casing. Smith is not responsible for any casings that burst or related incidents if the hydrant is supplied with a vacuum breaker.

#### Regularly Furnished:

Bronze Non-Freeze Post Hydrant with Cast Iron Casing Guard, and "T" Handle Key. Inlet and Hose Connection Size Furnished as Indicated by Figure Number Selected.

#### Variations:

- 1" (25) Hose Connection Adapter -HC1
- 1/8" (3) NPT Drain Hole -NV
- Secured Wheel Handle -WH
- 3/4" (19) Vacuum Breaker -H (Fig. 5910 Only)

#### Optional Materials:

- Aluminum Casing Guard -AG

#### Inlet and Hose Connections:

- Fig. 5910.....3/4" (19)
- Fig. 5911.....1" (25)