

Commercial Exposed Wall Hydrants



EXPOSED 1/4 TURN "TWIN-TEMP" NON-FREEZE WALL HYDRANT FOR HOT AND COLD WATER



5660QT (-WH)
Shown

**FIG. # 5660QT,
5661QT (-H-WH),
5661QT (SAP-H-WH),**
Twin-Temp Hydrant

FUNCTION:

Provides positive non-freeze protection where water is required at the outside of the building. Ideal for use in food handling areas, dairies and other places where both hot and cold water are desired. A 1/4 turn of the key allows full flow to be obtained.

PRODUCT FEATURES:

- Quarter-turn full-flow feature
- 3/4" (19) inlet and hose connection
- Removable "T" handle key
- Recessed installation to eliminate catch points
- Ideal for use in food handling areas, dairies or other applications that require hot and cold water.
- Replacement parts are available in kit HPRK - 7.

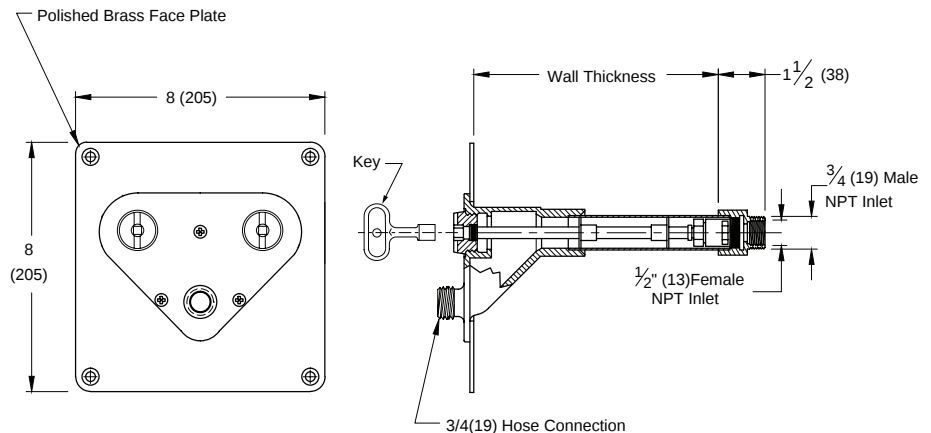


Fig. 5660QT 1/2"(13) FEMALE & 3/4"(19) MALE INLET
Fig. 5661QT 1"(25) MALE INLET

Regularly Furnished:

Bronze Quarter Turn Non-Freeze "Twin-Temp" Hydrant with 3/4"(19) Hose Connection, "T" Handle Key. Inlet Size Furnished as Indicated by Figure Number Selected.

Variations:

- Adjustable Wall Clamp -WC
- Wheel Handle -WH
- Vacuum Breaker Self Draining Type -H

NOTE: Dimensions shown in parentheses are in millimeters.

NOTE: All Jay R. Smith Mfg. Co. hydrants are manufactured with "NO-LEAD" brazing rings and USDA approved lubricants.

Optional Materials:

- Nickel Bronze Face -NB
- Polished Bronze Face -PB
- Rough Bronze Face -RB