




FLOOR DRAINS

SUFFIX D, E - ADJUSTABLE STRAINER WITH ROUND REINFORCED TRACTOR GRATE



FUNCTION: Used in finished floors where medium weight wheeled loads are anticipated and loose set non-tilt tractor grate is desired.

OPTIONS:	ADD
-B Sediment Bucket	65.00
-BFV Ball Float Backwater Valve	230.00
-U Vandal Proof Screws	33.00
-V Flapper Backwater Valve.....	230.00

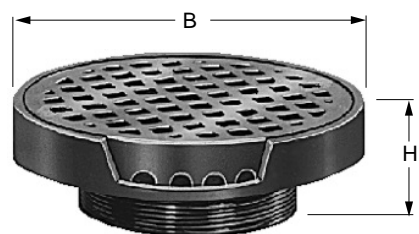


STRAINER SUFFIX	B TOP SIZE	H	†DUCO CI	PB TOP	NB TOP	CP TOP	APPROX. WEIGHT LBS
D	07"	3 1/4"	211.00	504.00	561.00	616.00	10
E	09"	3 1/2"	286.00	756.00	826.00	905.00	13

REGULARLY FURNISHED: Adjustable Strainer with Round Reinforced Tractor Grate.

SUFFIX F - ADJUSTABLE TILE FLANGE STRAINER WITH ROUND GRATE

FUNCTION: Provides integral flange set 5/32" below rim to receive floor covering. Flange may have option of tapped holes for securing pan and gasket.

OPTIONS:	ADD
-B Sediment Bucket	65.00
-BFV Ball Float Backwater Valve	230.00
-SH Tapped Holes in Flange	74.00
-U Vandal Proof Screws	33.00
-V Flapper Backwater Valve.....	230.00

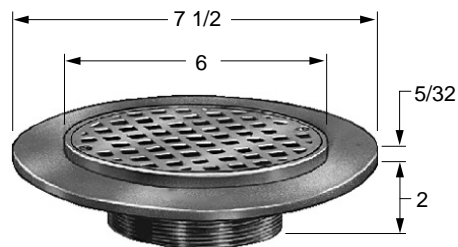

TOP SIZE	PB TOP	†NB TOP	CP TOP	APPROX. WEIGHT LBS
6"	504.00	562.00	617.00	5

REGULARLY FURNISHED:
Adjustable Tile Flange Strainer with Round Secured Grate.

