



TS4147 - Wireless 14" Double-Sided Synchronized Analog Clock



The **TS4147 Wireless 14" Double-Sided Synchronized Analog Clock** is designed with an easy-to-read dial face, durable frame and tamper-proof Plexiglass lens.


The TS4147 receives a wireless time signal transmitted daily by a main wireless paging controller, such as the **VS4800**. The TS4147 uses the time signal to automatically adjust itself, if necessary, to ensure accurate and synchronized time throughout the entire facility.

The TS4147 does not require any wiring and is ideal for renovation projects and new installations.

The TS4147 matches a wide variety of applications and provides years of maintenance-free service.

Key Features:

- Double-Sided Viewing
- Viewing Distance of 100'
- Automatic Daylight Saving Time Adjustment
- Tamper-Proof Plexiglass Lens
- Quick Correction for Time Change (1-3 Minutes)
- Wall or Ceiling Mount (Does Not Require Back Box)
- Battery Operated (Optional AC Power Adaptor)
- Customized Logo Option

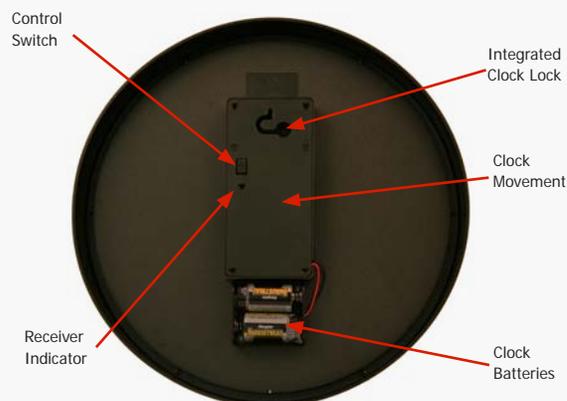

*Access to the Back of the TS4147 Requires Disassembly

Options, Accessories and Complementary Products:

Part Number	Description
TS-OPT-003	24-Hour Clock Face
TS-OPT-004	Customized Analog Clock Face
TS-OPT-005	Sealed Analog Clock
TS-OPT-007	110 V AC Adaptor (Replaces Original Clock Batteries, Requires 1.5" Minimum Recessed Power Outlet)
TS-OPT-011	Red Second Hand

Specifications:

Dimensions	13.6" x 5.1" (W x D)	Dial Face	12.5", White
Weight	6.60 lbs.	Frequency	VHF (148 - 174 MHz), UHF (400 - 470 MHz)
Power	Two C Sized Batteries Optional AC Power (AC-DC Adaptor)	Paging Format	POCSAG, Narrow Band
Operating Temperature	32° - 120°F	Synchronization	1 Time/Day (Optional 6 Times/Day, User Selectable)
Humidity	0% - 95%, Non-Condensing	Receiver Sensitivity	10u V/M
Frame and Lens	Polycarbonate Durable Frame, Plexiglass Lens	Limited Warranty	One Year Parts and Labor
Viewing Distance	100 ft.		

*Specifications Are Subject to Change Without Notification