


KP-4000C Network Touchscreen

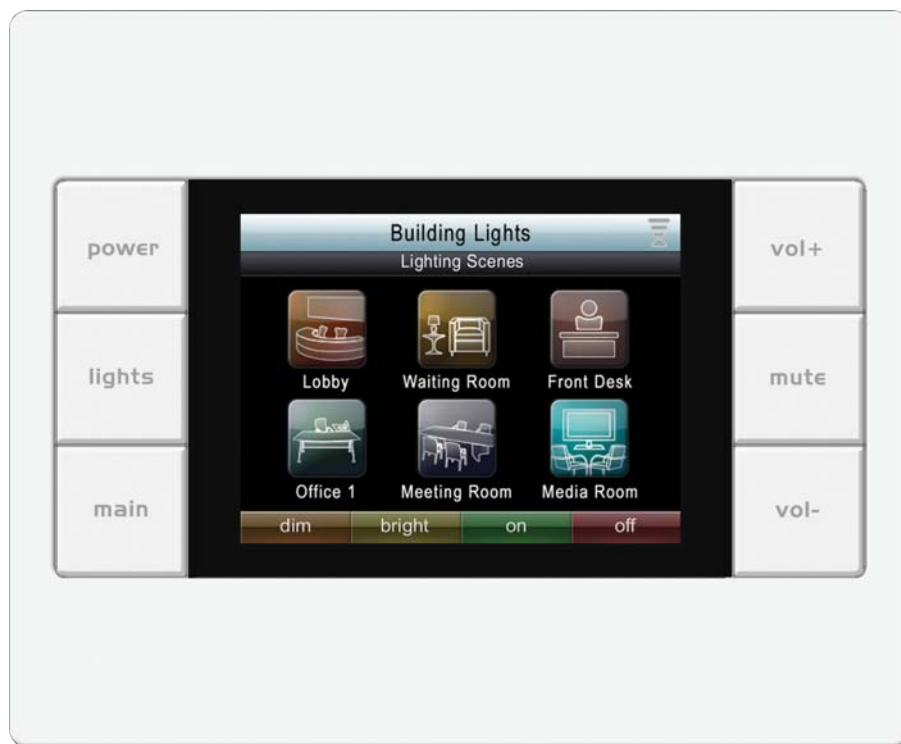

The KP-4000C Network Touchscreen controls audio visual components, energy management devices, multizone matrixes, PCs, PSX-2 Personal Server, and URC Lighting. MAC addressing enables the use of multiple KP-4000C touchscreens and multiple MRX-1 base stations to control as many components as needed throughout the office, classroom or home.

Features

- Native Network PoE In-Wall Touchscreen
- Self Contained Control Processor
- On-Board IR Engine for controlling 4 devices. Add 3rd party connecting block for easy expansion
- Virtually unlimited control of IP devices
- Control RS-232 devices with a base station like the MRX-1
- User-adjustable Scenes for URC Lighting via RFTX-1
- Interchangeable Buttons
- Motion jpeg Decoding for URC Cameras
- Two-Way control of URC devices & supported 3rd party devices & Sub systems
- Add control of non embedded 3rd party devices “on the fly” in CCP Software
- Supports bmp, jpg, png and gif animations

Specifications

Microprocessor: 190MHz RISC

Memory: 128MB Flash

Devices: Supports up to 255 Devices with text (less with heavy graphics usage)

Pages: Supports up to 255 Pages on each Device with text, less with heavy graphics usage

Macro Capability: Up to 255 steps

Network: One 10/100 Ethernet port (PoE)

LCD: 3.5 inch (320px x 240px)

Fits: Standard 2-gang box

Size: 5.75" x 4.7" x 1.8" (apx. W x H x D)

Weight: 9.8 oz (apx.)

Power: Standard PoE Injector, PoE Switch or 12V DC 1A Adapter (not included)

