



## TS4124 - Wireless 12.5" Synchronized Analog Clock



The **TS4124 Wireless 12.5" Synchronized Analog Clock** is designed with an easy-to-read dial face, durable cherry finished wood frame and tamper-proof glass lens.


The TS4124 receives a wireless time signal transmitted daily by a main wireless paging controller, such as the **VS4800**. The TS4124 uses the time signal to automatically adjust itself, if necessary, to ensure accurate and synchronized time throughout the entire facility.

The TS4124 does not require any wiring and is ideal for renovation projects and new installations.

The TS4124 matches a wide variety of applications and provides years of maintenance-free service.

### Key Features:

- Viewing Distance of 100'
- Automatic Daylight Saving Time Adjustment
- Tamper-Proof Glass Lens
- Quick Correction for Time Change (1-3 Minutes)
- Flush Mount (Does Not Require Back Box)
- Battery Operated (Optional AC Power Adaptor)
- Customized Logo Option

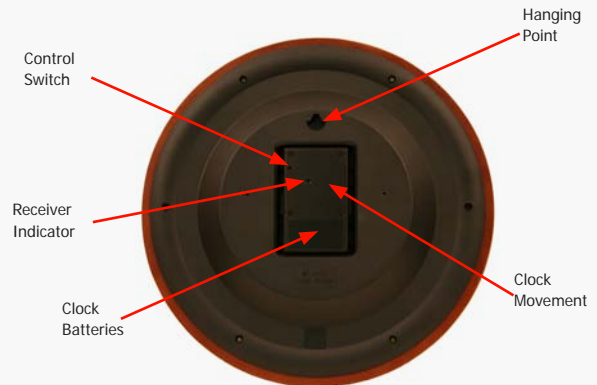

### Options, Accessories and Complementary Products:

Part Number	Description
TS-OPT-003	24-Hour Clock Face
TS-OPT-004	Customized Analog Clock Face
TS-OPT-005	Sealed Analog Clock
TS-OPT-007	110 V AC Adaptor (Replaces Original Clock Batteries, Requires 1.5" Minimum Recessed Power Outlet)
TS-OPT-011	Red Second Hand

### Specifications:

Dimensions	12.5" x 1.75" (W x D)	Dial Face	10.5", White
Weight	1.95 lbs.	Frequency	VHF (148 - 174 MHz), UHF (400 - 470 MHz)
Power	Two AA Sized Batteries Optional AC Power (AC-DC Adaptor)	Paging Format	POCSAG, Narrow Band
Operating Temperature	32° - 120°F	Synchronization	1 Time/Day (Optional 6 Times/Day, User Selectable)
Humidity	0% - 95%, Non-Condensing	Receiver Sensitivity	10u V/M
Frame and Lens	Wood Durable Frame, Glass Lens	Limited Warranty	One Year Parts and Labor
Viewing Distance	100 ft.		

\*Specifications Are Subject to Change Without Notification