

BROADWAY™ ACCENT PANELS ARK™ & APEX™

Primacoustic Broadway Accent panels are a range of acoustic panels that combine the high performance of Broadway panels with graceful curves, classic window profiles, and avant-garde shapes sure to excite the most discriminating designer. The 'Ark' is a 2" (51mm) thick, quarter circle panel that measures 24" (609mm) along the straight edges and a 38" (965mm) radius. The 'Apex' is a right-angle triangle that measures 24" (609mm) x 24" (609mm) x 34" (864mm). The beveled edge of both Accent series panels is designed to naturally mate with all of our standard 2" beveled Broadway panels to create distinctive designs and patterns that will flatter any wall surface. As with all Broadway panels, the Accent series are available in Black, Grey, or beige and are Class 1/A fire rated for safe installation in any space.


SPECIFICATIONS:

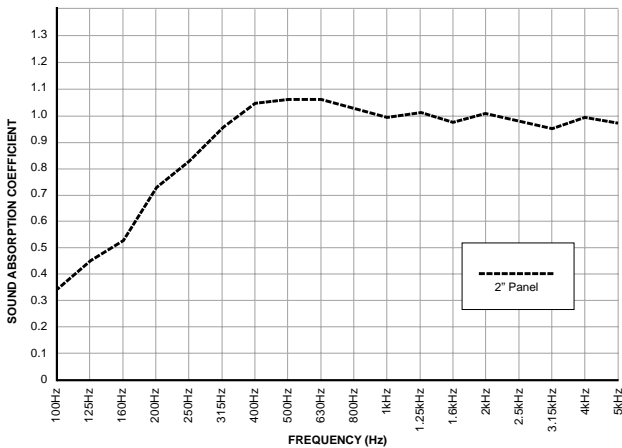
DIMENSIONS	24" x 24" (610mm x 610mm)
PANEL DEPTH	2" (51mm)
CORE MATERIAL DENSITY	Formed, semirigid inorganic glass fibers, 6.0 lbs pcf (96 kg/m ³)
FABRIC FACING	Acoustically transparent polyester
BACKING	Sealed with acoustically transparent micro-mesh
EDGE TREATMENT	Sealed and hardened with resin

ABSORPTION CHARACTERISTICS:*

Sound absorption coefficient data

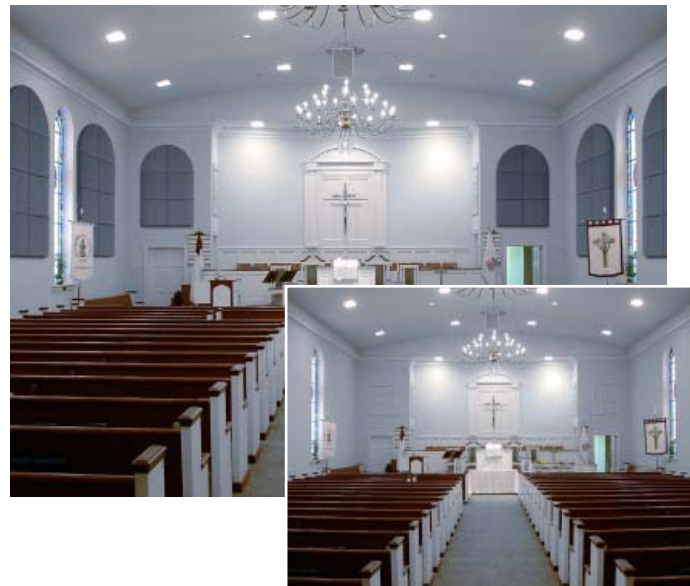
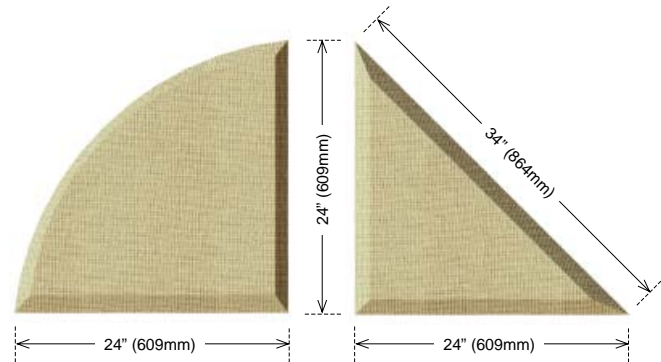
PANEL DEPTH	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	NRC
2" Depth	0.45	0.83	1.07	1.00	1.01	1.00	1.00

* Testing performed by Riverbank Acoustical Laboratories. The test method conformed explicitly with the requirements of the ASTM Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method: ASTM C 423-02a and E795-05.


FIRE & BURN PERFORMANCE:**

TEST	CLASS	FLAME SPREAD	SMOKE DENSITY
ASTM E 84-05	1 OR A	15 FSI	155 SD
CAN/UL-S102	1 OR A	15 FSC1	155 SD

** This method, designated as ASTM E 84-05, "Standard Method of Test for Surface Burning Characteristics of Building Materials", is used to measure and describe the response of materials, products, or assemblies to heat and flame under controlled conditions, but does not by itself incorporate all factors required for fire-hazard or fire-risk assessment of the materials, products, or assemblies under actual fire condition.


MOUNTING OPTIONS:

SURFACE IMPALER
F101-1000-00
24 per box