



High-quality, architecturally pleasing, innovative access doors for walls, ceilings, ducts, floors and roofs



# RHG, RHA Roof Hatch: Galvanized or Aluminum

## Application

- Acudor Roof Hatches are designed to provide convenient, economical access to the Roof of a building.

## Product Features

- Available in prime coated galvanized steel or aluminum, mill finish
- Optional Curb Height of 16 inches for "Green Roof" applications
- Optional Features: Acrylic and Polycarbonate Domes – Stainless Steel Hardware – Louvered Curbs – Curb Mounted Units – Sloped Curbs
- Optional Accessories: Safety Ladder Extension (SLE-Y) – Telescoping Safety Post (TSP-1) – Safety Railing System (RHSR)

## Roof Hatch Specifications:

**Cover:** Double-skin construction ("in box type design") with 1" cellulose insulation and a continuous EPDM foam weather/draft seal gasket that is attached to inside of cover to provide a flush tight fit. The cover is designed to support a live load of 40 lbs./sq. ft. Outer skin is 14 gauge Galvanized steel or 0.091" Aluminum up to 36"x36", 0.102" Aluminum for sizes over 36"x36" (Single Leaf) and 0.125" Aluminum for sizes over 36"x36" (Double Leaf) Inner Skin: 22 gauge galvanized steel or .032" aluminum


**Curb:** 14 gauge galvanized steel/ 10 gauge .102 aluminum with 1" thick fibreboard roof insulation at curb exterior. Curb is 12" high, with 3.375" wide bottom flange and pre-drilled mounting holes.

**Hinge:** Zinc plated steel or stainless steel

**Opening:** Gas spring operators allow cover to open and close with ease. Built in hold open arm locks cover into open position. Inside pull handle allows for easy control when closing cover.

**Door Latch:** Self Latching zinc plated outside T handle with stainless steel inside lock and lever assembly. Unit also has inside and outside padlock provisions.

**Finish:** Galvanized Steel: Grey baked enamel polyester / Aluminum: Mill finish

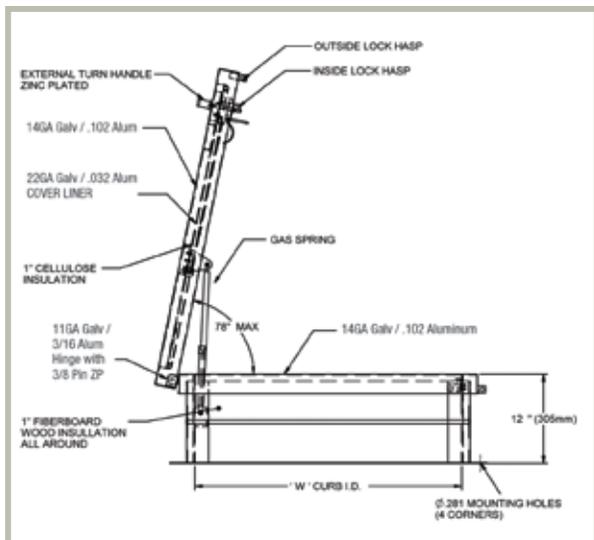

## STANDARD SIZES (Special sizes available upon request)

| MODEL  | DOOR SIZE<br>INCHES & MM |             | MATERIAL   | WEIGHT LBS & KGS<br>LBS & KGS |       |
|--------|--------------------------|-------------|------------|-------------------------------|-------|
| G3232  | 24 X 24                  | 610 X 610   | GALVANIZED | 125                           | 56.8  |
| G3244  | 36 X 24                  | 914 X 610   | GALVANIZED | 135                           | 61.4  |
| G3844  | 36 X 30                  | 914 X 762   | GALVANIZED | 155                           | 70.5  |
| G4444  | 36 X 36                  | 914 X 914   | GALVANIZED | 170                           | 77.3  |
| G5656  | 48 X 48                  | 1220 X 1220 | GALVANIZED | 185                           | 84.0  |
| G3862  | 30 X 54                  | 1372 X 762  | GALVANIZED | 225                           | 102.3 |
| G38104 | 30 X 96                  | 762 X 2438  | GALVANIZED | 335                           | 152.3 |
| A3232  | 24 X 24                  | 610 X 610   | ALUMINUM   | 60                            | 27.3  |
| A3244  | 36 X 24                  | 914 X 610   | ALUMINUM   | 70                            | 31.8  |
| A3844  | 36 X 30                  | 914 X 762   | ALUMINUM   | 85                            | 38.6  |
| A4444  | 36 X 36                  | 914 X 914   | ALUMINUM   | 95                            | 43.2  |
| A5656  | 48 X 48                  | 1220 X 1220 | ALUMINUM   | 115                           | 52.3  |
| A3862  | 30 X 54                  | 762 X 1372  | ALUMINUM   | 135                           | 61.4  |
| A38104 | 30 X 96                  | 762 X 2438  | ALUMINUM   | 245                           | 111.4 |

For more information on Acudor Products Inc. visit [www.acudor.com](http://www.acudor.com) or call 800.722.0501

Product specifications may change without notice. Acudor is a registered Trade Mark ©2009