

# Liberty Platinum Sound System

MADE IN USA



SIX YEAR WARRANTY

## Technical Specifications



**AC Only Also Available**

### Features

Reach Crowds of 1,000+

AC Mode = 125W / DC Mode = 100W

Peak Wattage = 250W AC / 220W DC Mode

Single or Dual Built-in UHF Wireless with 16 User Selectable Channels

Optional Built-In MP3 Player Accepts SD Card, USB Flash Drive or 3.5mm input for iPod

Optional Built-In CD Player

USB Port for Charging MP3 Player/iPod®

"Voice Over" Music Ducking Feature

Two Universal Microphone Input Jacks

Recessed Back Panel Protects Knobs and Ports

True AC/DC or AC only - 110/220V Power Supply

Ceramic Compression Driver

10" Woofer

Proprietary Class D Amplifier

User Replaceable Batteries

Charging LED Bar Indicator

Operates 6-8 hours on a Single Charge

Speaker Out to Power Companion Speaker


### LIBERTY MODELS AC/DC

LIB-7500	AC/DC powered sound system
LIB-7500U1	One built-in wireless receiver
LIB-7500U2	Two built-in wireless receivers
LIB-7500M	Built-in MP3 player
LIB-7500MU1	Built-in MP3 player & one built-in wireless receiver
LIB-7500MU2	Built-in MP3 player & two built-in wireless receivers
LIB-7500C	Built-in CD player
LIB-7500CU1	Built-in CD player & one built-in wireless receiver
LIB-7500CU2	Built-in CD player & two built-in wireless receivers
LIB-7501	Unpowered speaker

### UHF WIRELESS

WH-6000	Wireless handheld microphone transmitter
WB-6000	Wireless body-pack transmitter (requires handsfree microphone)

Microphone options include:  
Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBMTA4F

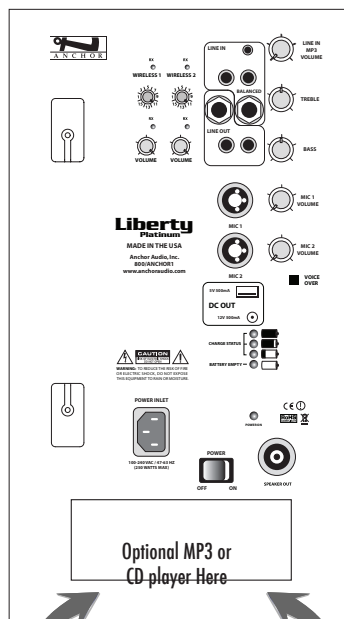

(LIB-7500MU2 with MP3 player)



(LIB-7500CU2 with CD player)

### TECHNICAL SPECIFICATIONS

Rated Power Output	125 watts AC / 100 watts DC	Mic Inputs:	Lo-Z (1 K $\Omega$ ), balanced, XLR
Max SPL @ Rated Power	110 dB		12 VDC condenser mic (phantom) power
Battery	Two 12 V, lead acid rechargeable, 9.0 AH Full recharge: approx 7 hrs		Hi-Z (10 K $\Omega$ ), unbalanced, 1/4" phone
Frequency Response	60 Hz - 15 kHz $\pm$ 3dB		Hi-Z (10 K $\Omega$ ), unbalanced, 1/8" stereo, 1/4" phone
Line Output (post fader)	isolated, 600 $\Omega$ , 1/4" phone	Line In/Out	unbalanced, stereo RCA
AC Power Reqs.	100 - 240 VAC, 50/60 Hz, 300W max	Sensitivity For Rated Output	
DC Out	12V 500mA	Lo-Z Microphone	-52 dBV (2.5 mVrms)
USB	5V 500mA	Hi-Z Microphone	-43 dBV (7.5 mVrms)
Dimensions (HWD)	22" x 14" x 11.5" (56 x 35.6 x 29.2 cm)	Auxiliary (line)	-14 dBV (200 mVrms)
Weight (AC/DC)	38 lbs / 17 Kg	Phantom Power	36V
Weight (AC only)	26 lbs / 12 Kg	Speaker Out	4-pole Neutrik Speakon® jack

(Features & Specifications Subject to Change Without Notice)

**Anchor Audio, Inc.**  
Portable Sound Systems • Carlsbad, California

**800.262.4671**

[www.anchoraudio.com](http://www.anchoraudio.com)

S-L/0910

