



25 Series - Speaker Attenuators

*WIRING DIAGRAM
FOR 25-341, 25-342A,
25-352, 25-353, 25-452,
25-453

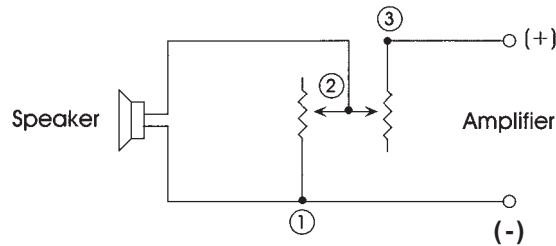

Wire 1,3 Amp, 1,2 Speaker




Commercial or Residential Use

25-351 10 WATT 70 VOLT AUDIO LINE ATTENUATOR -MONO

25-351A 10 WATT 8Ω AUDIO LINE ATTENUATOR -MONO


Flush mount auto transformer type. Fits into standard single gang box or ring. Excellent for use in home, paging and background music systems. Features a 10-position volume selector switch with 3dB step attenuation and a positive off position. Complete with stainless steel mounting plate, knob, with terminal block connectors. Depth 2 1/8". First 2 steps are 6dB, others are 3dB.

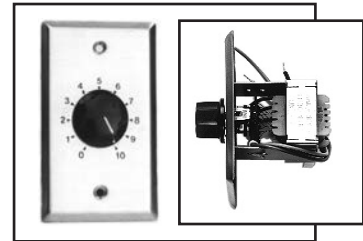

25-339 10 WATT 8Ω AUDIO LINE ATTENUATOR - STEREO

25-339A 10 WATT 70 VOLT AUDIO LINE ATTENUATOR - STEREO

Same as 25-351 (Stereo Version). 10 Watt-70 Volt. Dimensions: 2 1/2" deep x 2 1/2" high x 2" width (less shaft and knob).

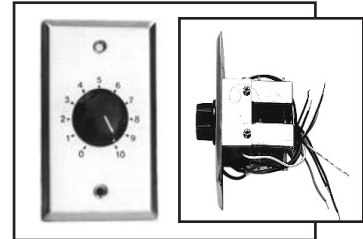

25-357 20 WATT 8Ω AUDIO LINE ATTENUATOR - STEREO

25-357A 20 WATT 70 VOLT AUDIO LINE ATTENUATOR - STEREO

25-354 25 WATT 8Ω STEREO ATTENUATOR

Single-gang box mount

25-355 40 WATT 8Ω STEREO ATTENUATOR

Click type attenuators with isolation transformers. 3 dB (10) step attenuation. Comes with terminal block connectors. White insert and knob with pointer. Accepts up to 14 awg cable. 2.3" deep. Single-gang box mount.



25-360

70 WATT 8Ω AUDIO LINE ATTENUATOR - STEREO

12 step design, each step being 3dB. The last 4 steps are 6dB each. 70 watts per channel, 150 watts peak. White insert and knob with pointer. Accepts up to 14 awg cable. Removable terminal blocks cable installation. 2.7" deep.

